


Luminaire

Code BB12004_50+M239200
 Name LUCERI Q TRIM MAX46W 930 MIRROR BLACK + schermo trasparente

Measurem.

Code FTS1801213-A
 Name LUCERI Q TRIM MAX46W 930 MIRROR BLACK + schermo trasparente

| | | | | | | | |
|--|-------------------|-----------------|----------------|-----------------------------|---------------|--------------------|--------------------|
| Luminaire Flux | 4539 lm | Luminaire Power | 50.0 W | Efficacy | 90.780 lm/W | Efficiency | 100.00% |
| Source Flux | 4539 lm | Maximum value | 1073.64 cd/klm | Position | C=0.00 G=1.00 | CG | Double Symmetrical |
| Rectangular Luminaire | | Length | 188 mm | Width | 188 mm | Height | 238 mm |
| Rectangular Luminous Area | | Length | 184 mm | Width | 184 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.033856 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.008191 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 25-03-2025 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 4539 lm | |
| LED Flux=6047lm LED Power=50W Eff=75% EfcLed=121lm/W EfcLum=91lm/W CCT=3000K Ra=90 R9=50 SDCM=1 L70(9k)=50000h | | | | | | | |
| C.I.E. | 93 99 100 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | 1.00 A | | | B NBN | BZ 1 | | |

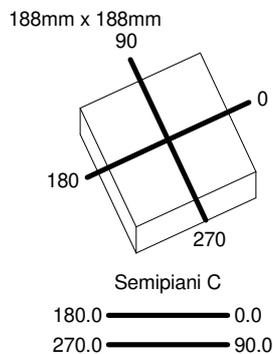

ULOR 0.00 %
 DLOR100.00 %
 RN 0.00 %

