


Luminaire

Code BB12004_50+M239700
 Name LUCERI Q TRIM MAX46W 930 MIRROR BLACK + schermo opalino


Measurement

Code FTS1801277-A
 Name LUCERI Q TRIM MAX46W 930 MIRROR BLACK + schermo opalino

Luminaire Flux	4094 lm	Luminaire Power	50.0 W	Efficacy	81.880 lm/W	Efficiency	100.00%
Source Flux	4094 lm	Maximum value	431.21 cd/klm	Position	C=45.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	188 mm	Width	188 mm	Height	238 mm
Rectangular Luminous Area		Length	184 mm	Width	184 mm	Height	0 mm
Horizontal Luminous Area		0.033856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.008191 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4094 lm	
LED Flux=6047lm LED Power=50W Eff=68% EfcLed=121lm/W EfcLum=82lm/W CCT=3000K Ra=90 R9=50 SDCM=1 L70(9k)=50000h							
C.I.E.	52 82 96 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		

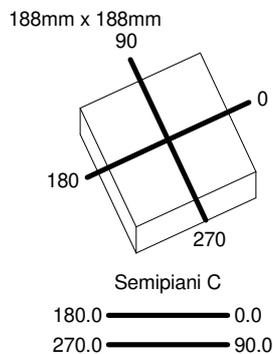

ULOR 0.04 %
 DLOR 99.96 %
 RN 0.04 %

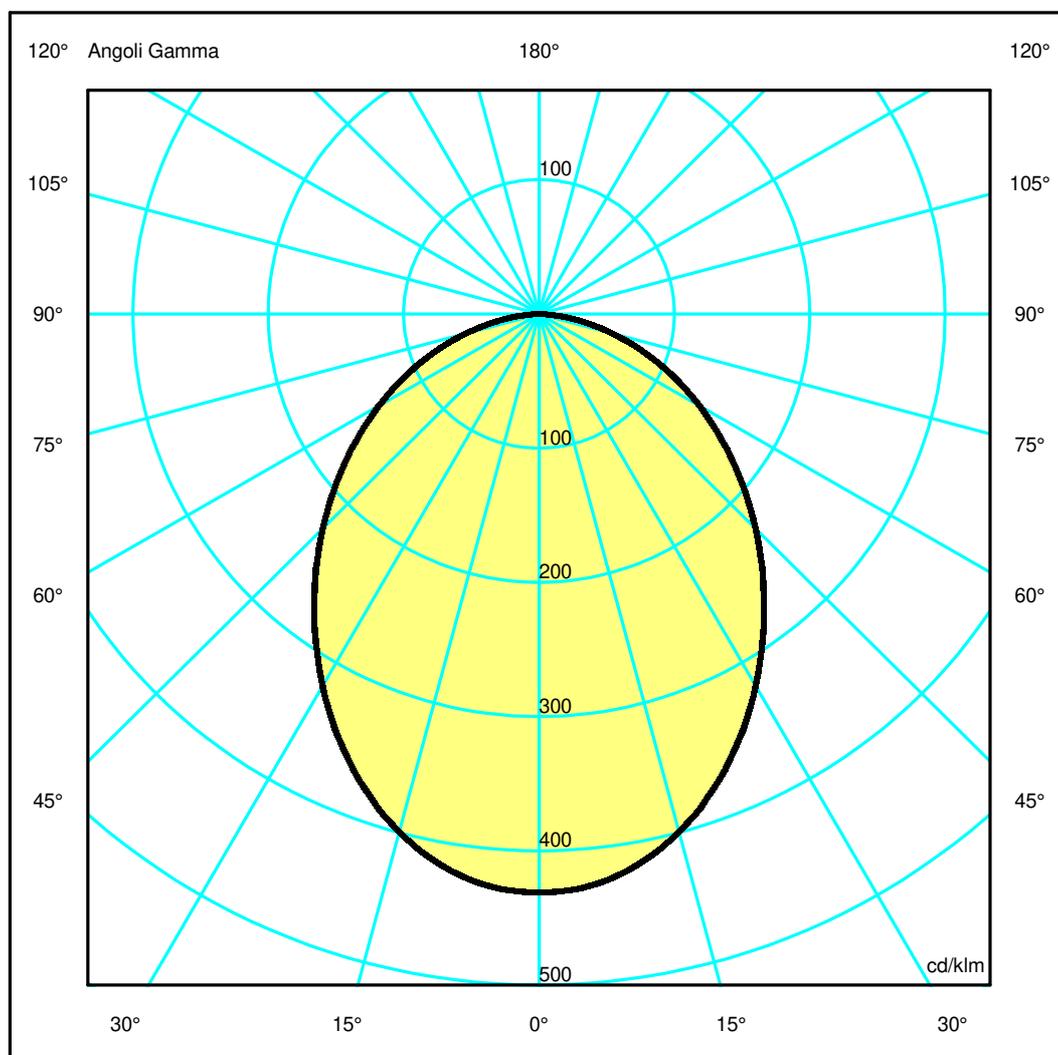

Luminaire

Code BB12004_50+M239700
Name LUCERI Q TRIM MAX46W 930 MIRROR BLACK + schermo opalino

Measurment


Code FTS1801277-A
Name LUCERI Q TRIM MAX46W 930 MIRROR BLACK + schermo opalino

Luminaire Flux	4094 lm	Luminaire Power	50.0 W	Efficacy	81.880 lm/W	Efficiency	100.00%
Source Flux	4094 lm	Maximum value	431.21 cd/klm	Position	C=45.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	188 mm	Width	188 mm	Height	238 mm
Rectangular Luminous Area		Length	184 mm	Width	184 mm	Height	0 mm
Horizontal Luminous Area		0.033856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.008191 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4094 lm	
LED Flux=6047lm LED Power=50W Eff=68% EfcLed=121lm/W EfcLum=82lm/W CCT=3000K Ra=90 R9=50 SDCM=1 L70(9k)=50000h							
C.I.E.	52 82 96 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.06	2.12	3.18	4.24	5.30	OC	1.06	2.12	3.18	4.24	5.30
OB	1.06	2.12	3.18	4.24	5.30	OD	1.06	2.12	3.18	4.24	5.30

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1764.61	1750.64	1634.98	1431.63	1183.85	926.09	676.45	445.94	229.92	51.89
OB	1764.61	1750.64	1634.98	1431.63	1183.85	926.09	676.45	445.94	229.92	51.89
OC	1764.61	1751.22	1635.79	1430.47	1181.98	924.82	676.97	447.48	230.03	50.34
OD	1764.61	1751.22	1635.79	1430.47	1181.98	924.82	676.97	447.48	230.03	50.34

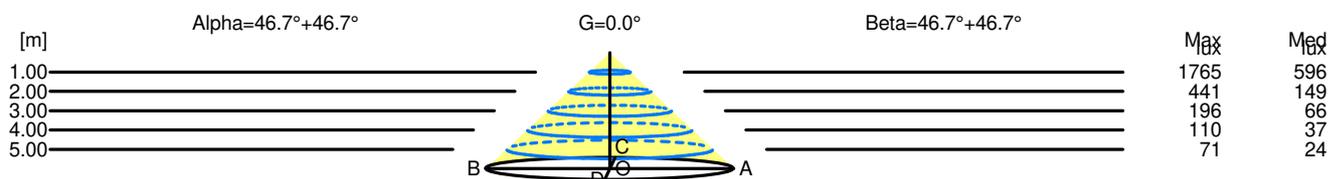

H[m]	D[m]	Max lux	Med lux	Alpha=46.7°+46.7°	G=0.0
1.00	2.12	1765	596		
2.00	4.24	441	149		
3.00	6.36	196	66		
4.00	8.48	110	37		
5.00	10.60	71	24		

H[m]	D[m]	Max lux	Med lux	Beta=46.7°+46.7°	G=0.0
1.00	2.12	1765	596		
2.00	4.24	441	149		
3.00	6.36	196	66		
4.00	8.49	110	37		
5.00	10.61	71	24		