

**Luminaire**

Code CH57005  
Name SYLT HELGOLAND 120 2700K FL SLV

**Measurem.**

Code FTS2500112  
Name SYLT HELGOLAND 120 2700K FL SLV


Luminaire Flux	1018 lm	Luminaire Power	8.5 W	Efficacy	119.765 lm/W	Efficiency	100.00%
Source Flux	1018 lm	Maximum value	3443.59 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	12 mm		
Round Luminous Area		Diam.	89 mm	Height	0 mm		
Horizontal Luminous Area			0.006221 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.001505 m2
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		03-12-2024		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			1018 lm

LED Flux=1458lm LED Power=8.5W Eff=70% EfcLed=171lm/W EfcLum=120lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E. 96 99 100 100 100  
F UTE 1.00 A

D DIN 5040  
B NBN  
A60  
BZ 1


Diam=120mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %

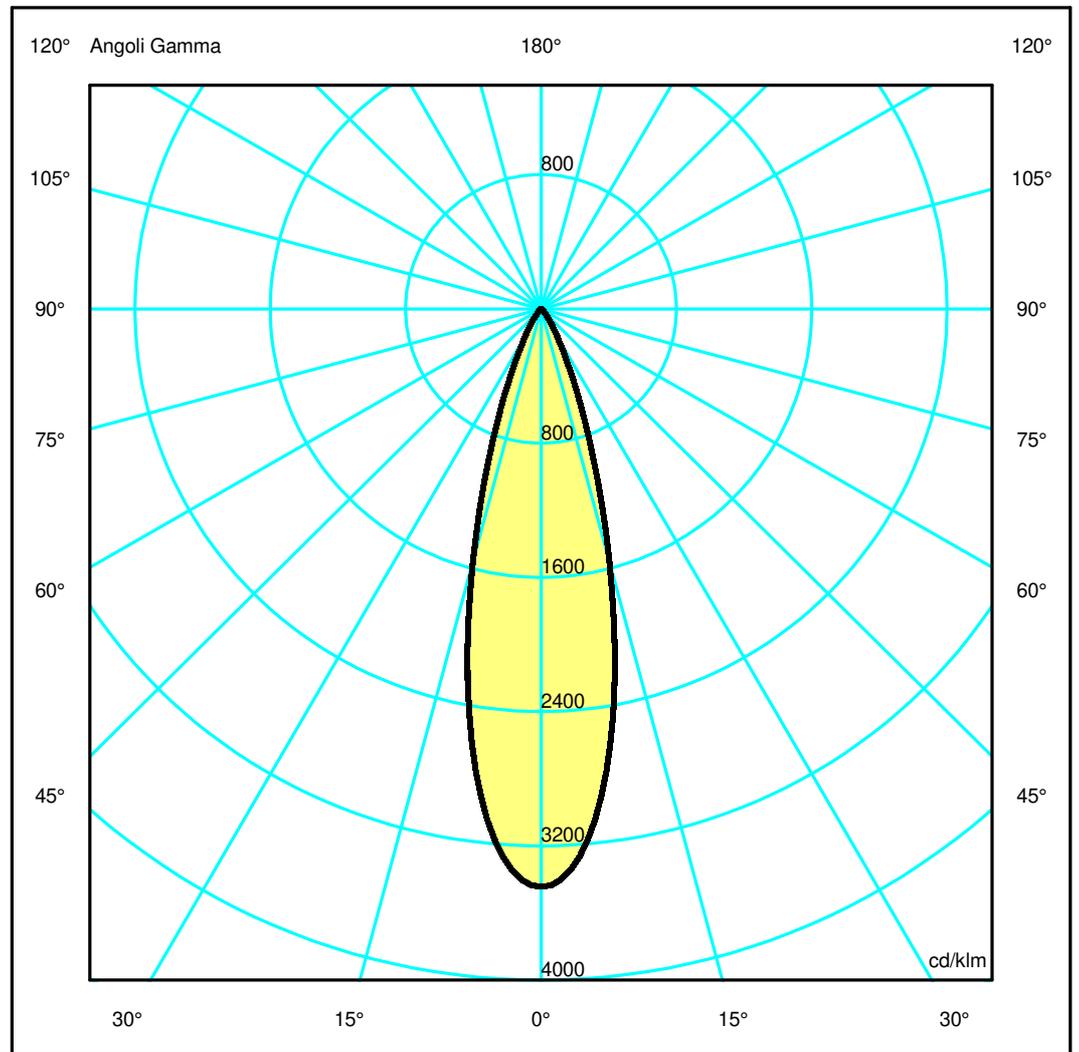

## Luminaire

Code CH57005  
Name SYLT HELGOLAND 120 2700K FL SLV

## Measurment

Code FTS2500112  
Name SYLT HELGOLAND 120 2700K FL SLV

Luminaire Flux	1018 lm	Luminaire Power	8.5 W	Efficacy	119.765 lm/W	Efficiency	100.00%
Source Flux	1018 lm	Maximum value	3443.59 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	12 mm		
Round Luminous Area		Diam.	89 mm	Height	0 mm		
Horizontal Luminous Area		0.006221 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001505 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-12-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1018 lm	


LED Flux=1458lm LED Power=8.5W Eff=70% EfcLed=171lm/W EfcLum=120lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E.	96 99 100 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.50	0.75	1.00	1.25	OC	0.25	0.50	0.75	1.00	1.25
OB	0.25	0.50	0.75	1.00	1.25	OD	0.25	0.50	0.75	1.00	1.25

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	3505.57	3229.36	1585.68	413.22	91.28	24.98	12.44	6.58	2.19	0.34
OB	3505.57	3229.36	1585.68	413.22	91.28	24.98	12.44	6.58	2.19	0.34
OC	3505.57	3229.36	1585.68	413.22	91.28	24.98	12.44	6.58	2.19	0.34
OD	3505.57	3229.36	1585.68	413.22	91.28	24.98	12.44	6.58	2.19	0.34

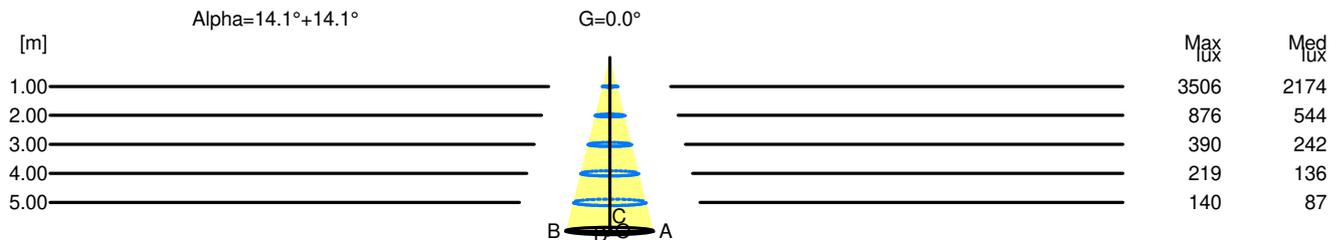

H[m]	D[m]	Max lux	Med lux	Alpha=14.1°+14.1°	G=0.0
1.00	0.50	3506	2174		
2.00	1.00	876	544		
3.00	1.50	390	242		
4.00	2.00	219	136		
5.00	2.51	140	87		