


Luminaire

Code DOI4300A14
Name LES DANSEUSES DIFFUSER BLUE/LIGHT BLUE

Measur.

Code FTS1700336
Name LES DANSEUSES DIFFUSER BLUE/LIGHT BLUE

Luminaire Flux	1481.33 lm	Luminaire Power	16.00 W	Efficacy	92.58 lm/W	Efficiency	100.00%
Lamps Flux	1481.33 lm	Maximum value	285.76 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 360 mm Diam. 275 mm	Height	720 mm	Height	65 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.059396 m2 0.017875 m2 0.017875 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°				0.017875 m2 0.017875 m2 0.031713 m2	
Coordinate system	CG	Symmetry Type				Rotosymmetrical	
Date	27-04-2017	Maximum Gamma Angle				180	
Measurement Distance	0.00	Measurement Flux				1481.33 lm	
LED Flux=2131,1lm LED Power=14,6W Eff=70% EfcLed=146lm/W EfcLum=93lm/W Ra=80 SDCM=3 L90(6K)=50000 h							
C.I.E.	42 73 91 92 100	D DIN 5040		A31			
F UTE	0.92 G + 0.08 T	B NBN		BZ 5			

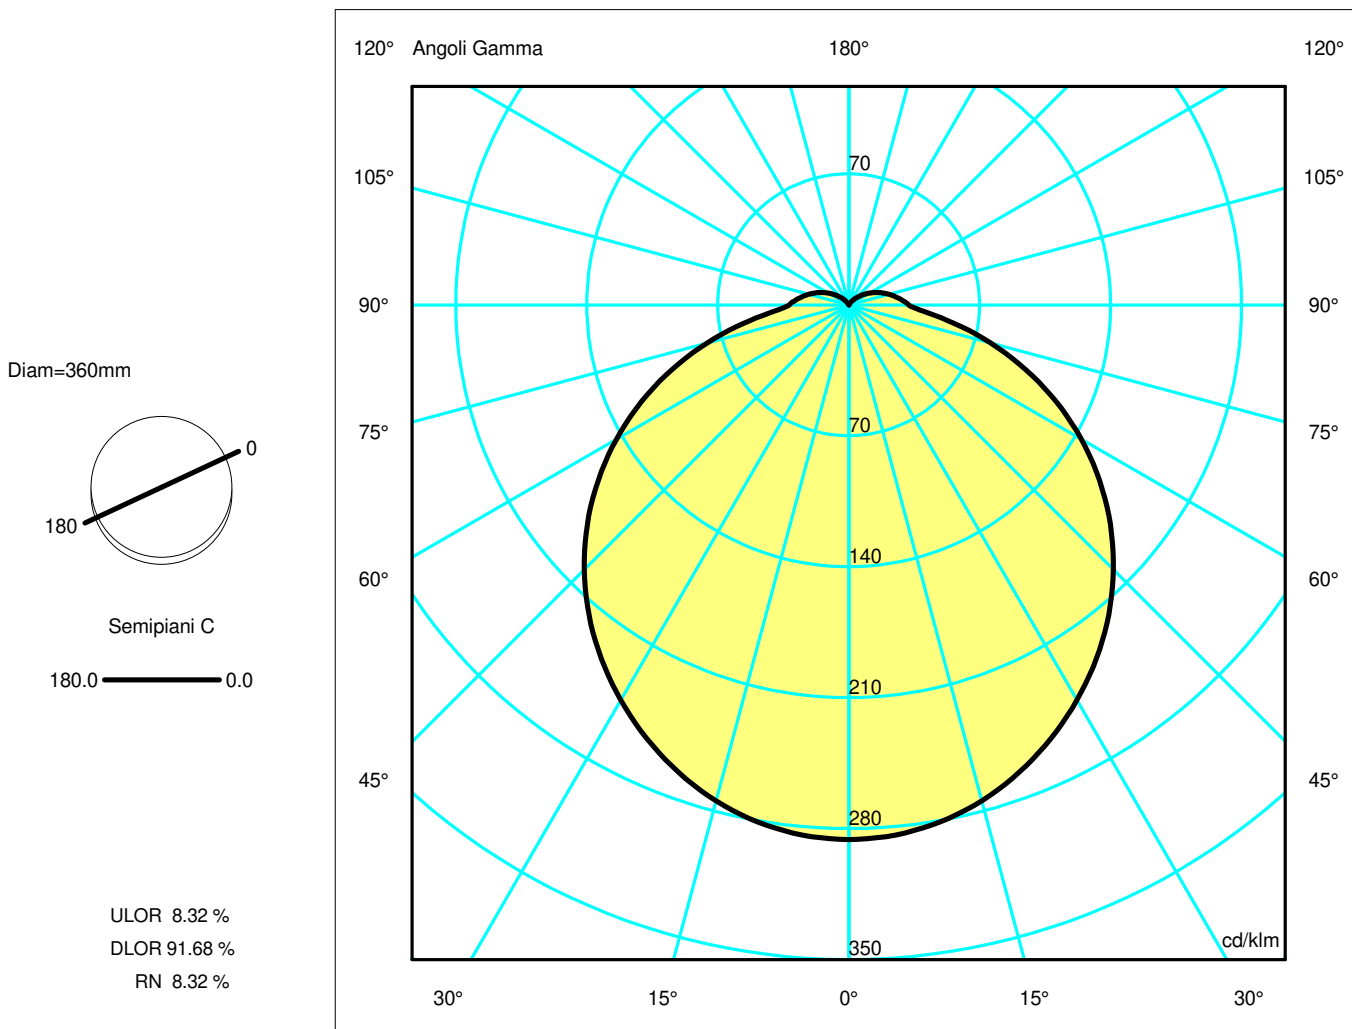

Luminaire

Code DOI4300A14
Name LES DANSEUSES DIFFUSER BLUE/LIGHT BLUE

Measurement


Code FTS1700336
Name LES DANSEUSES DIFFUSER BLUE/LIGHT BLUE

Luminaire Flux	1481.33 lm	Luminaire Power	16.00 W	Efficacy	92.58 lm/W	Efficiency	100.00%
Lamps Flux	1481.33 lm	Maximum value	285.76 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	360 mm 275 mm	Height Height	720 mm 65 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.059396 m2 0.017875 m2 0.017875 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.017875 m2 0.017875 m2 0.031713 m2	
Coordinate system Date Measurement Distance		CG 27-04-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1481.33 lm	
LED Flux=2131,1lm LED Power=14,6W Eff=70% EfcLed=146lm/W EfcLum=93lm/W Ra=80 SDCM=3 L90(6K)=50000 h							
C.I.E. F UTE	42 73 91 92 100 0.92 G + 0.08 T			D DIN 5040 B NBN	A31 BZ 5		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.74	3.48	5.22	6.97	8.71	OC	1.74	3.48	5.22	6.97	8.71
OB	1.74	3.48	5.22	6.97	8.71	OD	1.74	3.48	5.22	6.97	8.71

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	423.30	421.40	406.52	378.68	341.79	296.28	242.26	181.05	115.97	59.85
OB	423.30	421.40	406.52	378.68	341.79	296.28	242.26	181.05	115.97	59.85
OC	423.30	421.40	406.52	378.68	341.79	296.28	242.26	181.05	115.97	59.85
OD	423.30	421.40	406.52	378.68	341.79	296.28	242.26	181.05	115.97	59.85

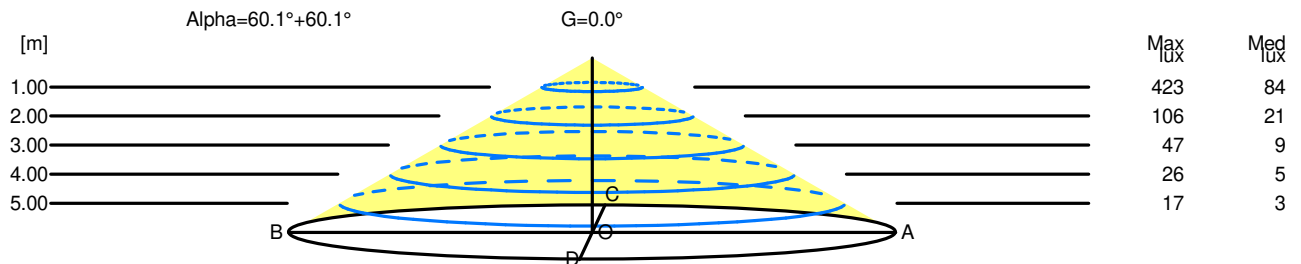

H[m]	D[m]	Max lux	Med lux	Alpha=60.1°+60.1°	G=0.0
1.00	3.48	423	84		
2.00	6.97	106	21		
3.00	10.45	47	9		
4.00	13.93	26	5		
5.00	17.42	17	3		