


Luminaire

Code AA20001_DMX_W
 Name LOT RIFR.RCS.TRIM.LED R+W BCO+BCO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 0 - CH5 0 - CH6 255

Measurement

Code FTS1700625
 Name LOT RIFR.RCS.TRIM.LED R+W BCO+BCO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 0 - CH5 0 - CH6 255

Luminaire Flux	266.88 lm	Luminaire Power	55.00 W	Efficacy	4.85 lm/W	Efficiency	100.00%
Lamps Flux	266.88 lm	Maximum value	360.84 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	180 mm 180 mm	Width Height	1 mm 0 mm	Height	80 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.025447 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.006156 m2				
Coordinate system	CG	Symmetry Type	Rotosymmetrical				
Date	21-03-2017	Maximum Gamma Angle	180				
Measurement Distance	0.00	Measurement Flux	266.88 lm				
Continuous Power=55W Peak Power=85W WHITE L70(6K)=50000 h							
C.I.E.	52 84 97 100 100	D DIN 5040	A40				
F UTE	1.00 D	B NBN	BZ 4				

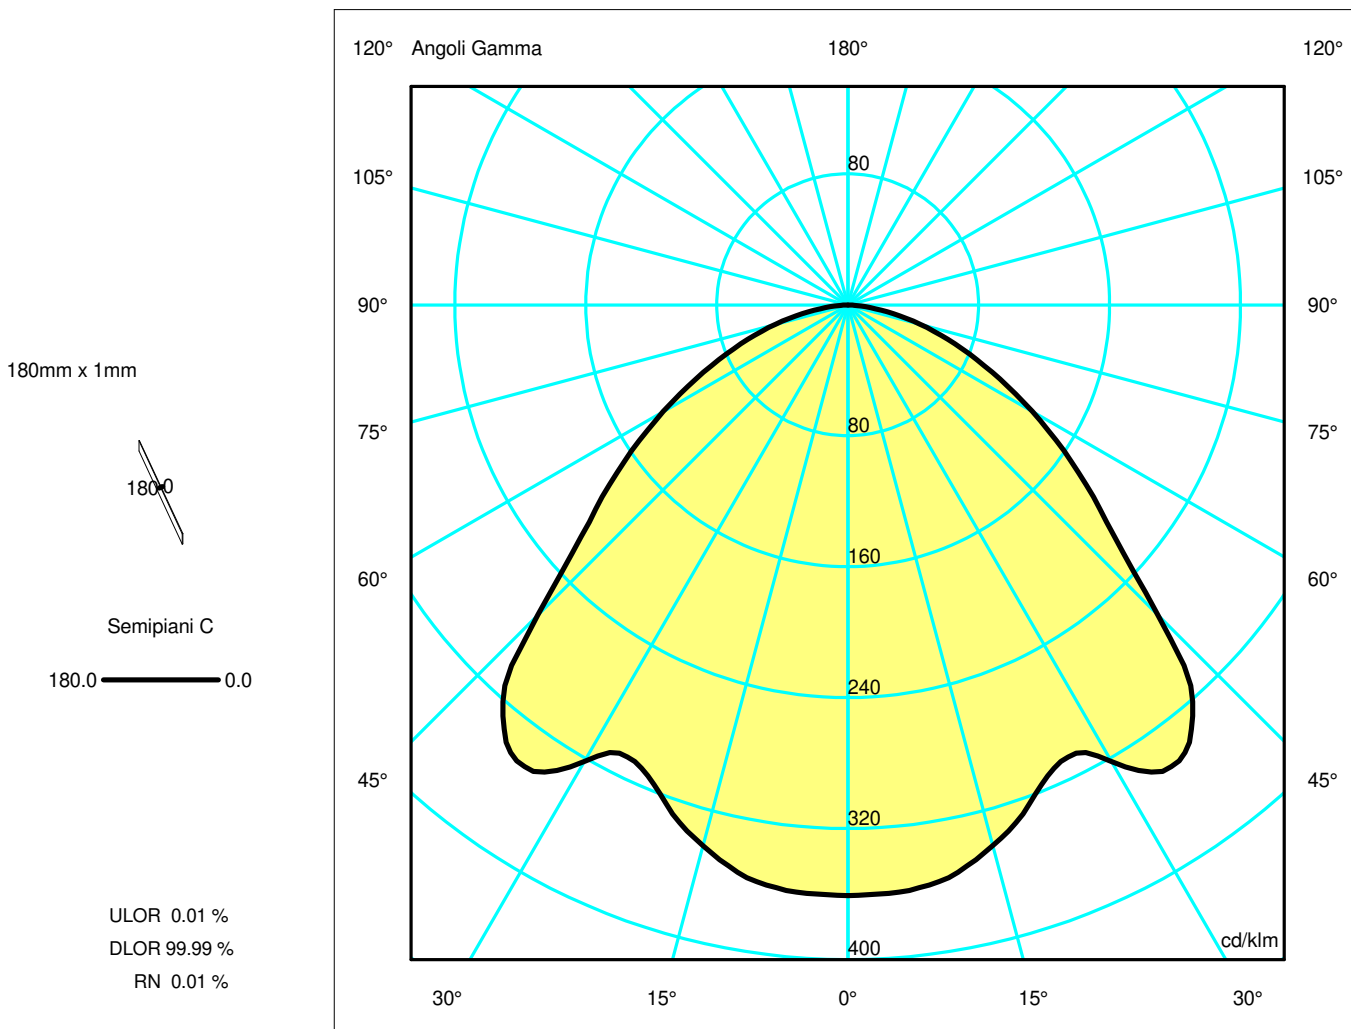

Luminaire

Code AA20001_DMX_W
 Name LOT RIFR.RCS.TRIM.LED R+W BCO+BCO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 0 - CH5 0 - CH6 255

Measurement


Code FTS1700625
 Name LOT RIFR.RCS.TRIM.LED R+W BCO+BCO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 0 - CH5 0 - CH6 255

Luminaire Flux	266.88 lm	Luminaire Power	55.00 W	Efficacy	4.85 lm/W	Efficiency	100.00%
Lamps Flux	266.88 lm	Maximum value	360.84 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	180 mm 180 mm	Width Height	1 mm 0 mm	Height	80 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.025447 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.006156 m2				
Coordinate system Date Measurement Distance	CG 21-03-2017 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 266.88 lm				
Continuous Power=55W Peak Power=85W WHITE L70(6K)=50000 h							
C.I.E. F UTE	52 84 97 100 100 1.00 D	D DIN 5040 B NBN	A40 BZ 4				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.34	2.68	4.01	5.35	6.69	OC	1.34	2.68	4.01	5.35	6.69
OB	1.34	2.68	4.01	5.35	6.69	OD	1.34	2.68	4.01	5.35	6.69

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	96.30	96.08	91.28	82.14	91.89	71.46	44.45	25.98	12.18	2.19
OB	96.30	96.08	91.28	82.14	91.89	71.46	44.45	25.98	12.18	2.19
OC	96.30	96.08	91.28	82.14	91.89	71.46	44.45	25.98	12.18	2.19
OD	96.30	96.08	91.28	82.14	91.89	71.46	44.45	25.98	12.18	2.19

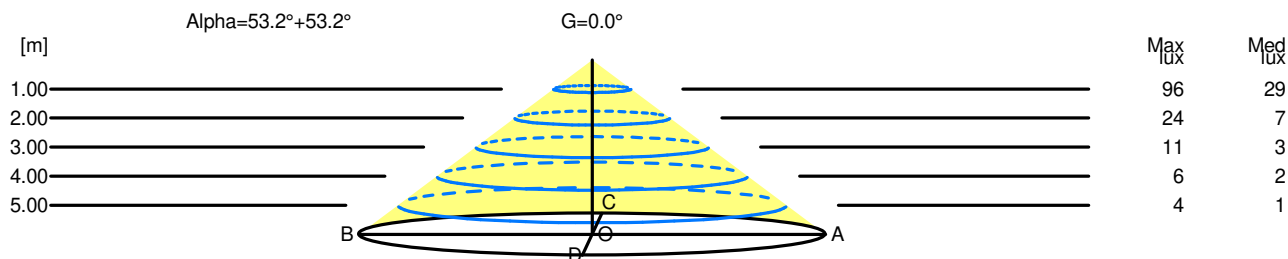

H[m]	D[m]	Max lux	Med lux	Alpha=53.2°+53.2°	G=0.0
1.00	2.68	96	29		
2.00	5.35	24	7		
3.00	8.03	11	3		
4.00	10.71	6	2		
5.00	13.38	4	1		