


## Luminaire

Code AA20001\_DMX\_R  
 Name LOT RIFR.RCS.TRIM.LED R+W BCO+BCO - DMX - CH1 0 - CH2 0 - CH3 255 - CH4 0 - CH5 0 - CH6 0

## Measurerm.

Code FTS1700607  
 Name LOT RIFR.RCS.TRIM.LED R+W BCO+BCO - DMX - CH1 0 - CH2 0 - CH3 255 - CH4 0 - CH5 0 - CH6 0

Luminaire Flux	224.88 lm	Luminaire Power	55.00 W	Efficacy	4.09 lm/W	Efficiency	100.00%
Lamps Flux	224.88 lm	Maximum value	343.74 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	185 mm 185 mm	Height Height	80 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.026880 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.006503 m2	
Coordinate system Date Measurement Distance		CG 21-03-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 224.88 lm	
Continuous Power=55W Peak Power=85W RED L70(6K)=50000 h							
C.I.E. F UTE	50 83 97 100 100 1.00 E			D DIN 5040 B NBN	A30 BZ 4		

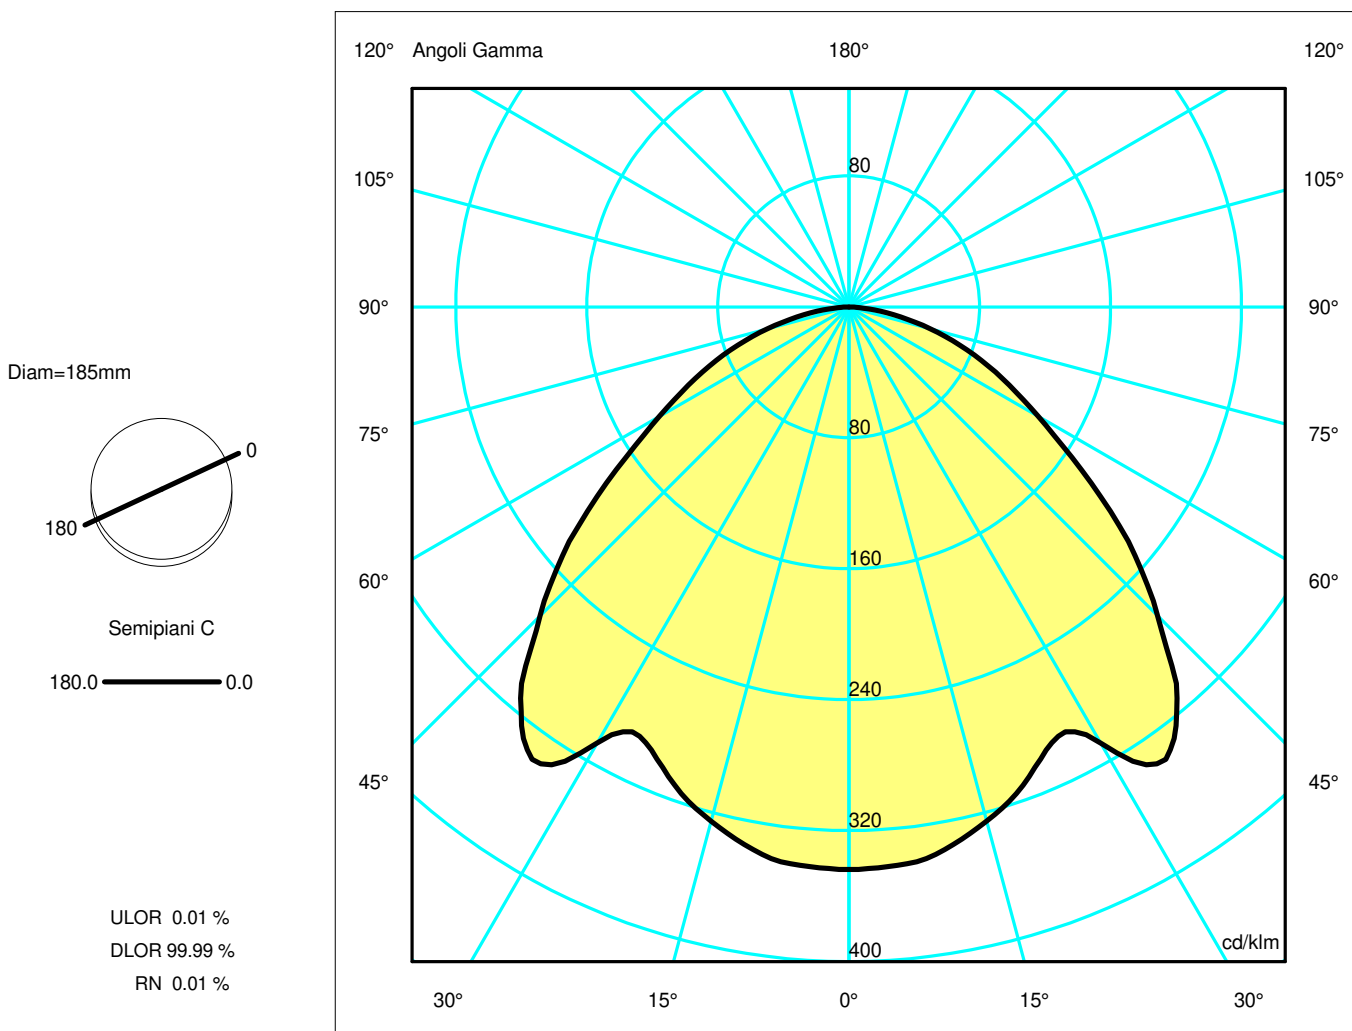

## Luminaire

Code AA20001\_DMX\_R  
 Name LOT RIFR.RCS.TRIM.LED R+W BCO+BCO - DMX - CH1 0 - CH2 0 - CH3 255 - CH4 0 - CH5 0 - CH6 0

## Measurement


Code FTS1700607  
 Name LOT RIFR.RCS.TRIM.LED R+W BCO+BCO - DMX - CH1 0 - CH2 0 - CH3 255 - CH4 0 - CH5 0 - CH6 0

Luminaire Flux	224.88 lm	Luminaire Power	55.00 W	Efficacy	4.09 lm/W	Efficiency	100.00%
Lamps Flux	224.88 lm	Maximum value	343.74 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	185 mm	Height	80 mm		
Round Luminous Area		Diam.	185 mm	Height	0 mm		
Horizontal Luminous Area	0.026880 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.006503 m2		
Coordinate system	CG			Symmetry Type	180		Rotosymmetrical
Date	21-03-2017			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	224.88 lm		
Continuous Power=55W Peak Power=85W RED L70(6K)=50000 h							
C.I.E.	50 83 97 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 4		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.44	2.88	4.31	5.75	7.19	OC	1.44	2.88	4.31	5.75	7.19
OB	1.44	2.88	4.31	5.75	7.19	OD	1.44	2.88	4.31	5.75	7.19

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	77.30	76.99	73.14	66.05	75.89	59.98	39.02	23.28	11.59	2.09
OB	77.30	76.99	73.14	66.05	75.89	59.98	39.02	23.28	11.59	2.09
OC	77.30	76.99	73.14	66.05	75.89	59.98	39.02	23.28	11.59	2.09
OD	77.30	76.99	73.14	66.05	75.89	59.98	39.02	23.28	11.59	2.09

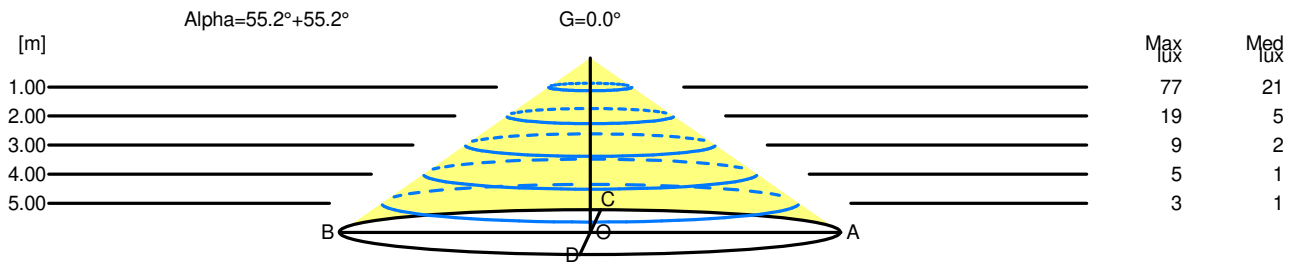

H[m]	D[m]	Max lux	Med lux	Alpha=55.2°+55.2°	G=0.0
1.00	2.88	77	21		
2.00	5.75	19	5		
3.00	8.63	9	2		
4.00	11.50	5	1		
5.00	14.38	3	1		