


Luminaire

Code AA50004_DMX_G
 Name LOT RIFR.SOSP.TRACK.LED R+W NRO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 255 - CH5 0 - CH6 0

Measurement

Code FTS1700317
 Name LOT RIFR.SOSP.TRACK.LED R+W NRO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 255 - CH5 0 - CH6 0

Luminaire Flux	388.67 lm	Luminaire Power	60.00 W	Efficacy	6.48 lm/W	Efficiency	100.00%
Lamps Flux	388.67 lm	Maximum value	331.67 cd/klm	Position	C=0.00 G=9.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 185 mm Diam. 185 mm	Height	80 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.026880 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.006503 m2				
Coordinate system	CG	Symmetry Type	Rotosymmetrical				
Date	20-03-2017	Maximum Gamma Angle	180				
Measurement Distance	0.00	Measurement Flux	388.67 lm				
Continuous Power=60 Peak Power=85W GREEN L70(6K)=50000 h							
C.I.E.	49 83 97 100 100	D DIN 5040	A30				
F UTE	1.00 E	B NBN	BZ 4				

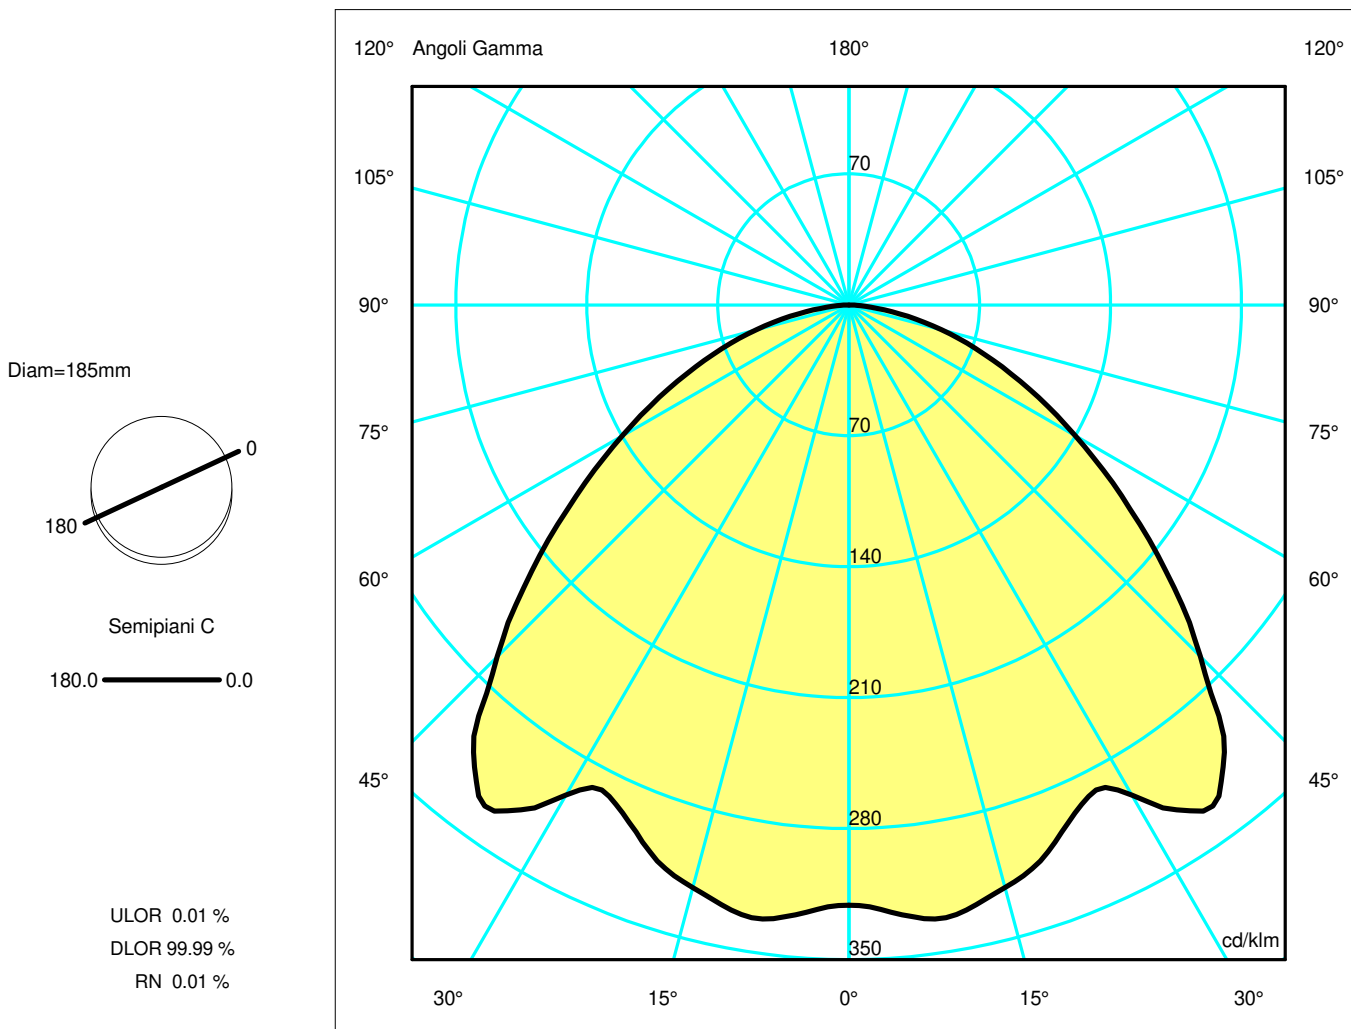

Luminaire

Code AA50004_DMX_G
 Name LOT RIFR.SOSP.TRACK.LED R+W NRO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 255 - CH5 0 - CH6 0

Measurement


Code FTS1700317
 Name LOT RIFR.SOSP.TRACK.LED R+W NRO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 255 - CH5 0 - CH6 0

Luminaire Flux	388.67 lm	Luminaire Power	60.00 W	Efficacy	6.48 lm/W	Efficiency	100.00%
Lamps Flux	388.67 lm	Maximum value	331.67 cd/klm	Position	C=0.00 G=9.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	185 mm 185 mm	Height Height	80 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.026880 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.006503 m2	
Coordinate system Date Measurement Distance		CG 20-03-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 388.67 lm	
Continuous Power=60 Peak Power=85W GREEN L70(6K)=50000 h							
C.I.E. F UTE	49 83 97 100 100 1.00 E			D DIN 5040 B NBN	A30 BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.51	3.02	4.54	6.05	7.56	OC	1.51	3.02	4.54	6.05	7.56
OB	1.51	3.02	4.54	6.05	7.56	OD	1.51	3.02	4.54	6.05	7.56

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	124.69	127.18	125.31	114.48	128.40	103.32	69.16	41.40	19.90	3.51
OB	124.69	127.18	125.31	114.48	128.40	103.32	69.16	41.40	19.90	3.51
OC	124.69	127.18	125.31	114.48	128.40	103.32	69.16	41.40	19.90	3.51
OD	124.69	127.18	125.31	114.48	128.40	103.32	69.16	41.40	19.90	3.51

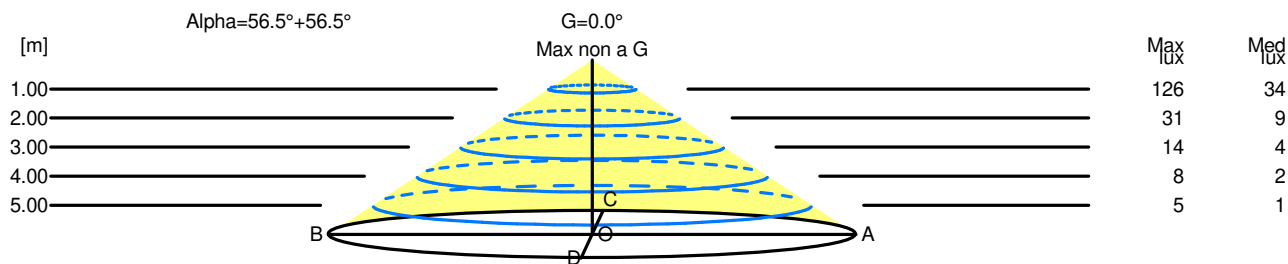

H[m]	D[m]	Max lux	Med lux	Alpha=56.5°+56.5°	G=0.0 Max non a G
1.00	3.02	126	34		
2.00	6.05	31	9		
3.00	9.07	14	4		
4.00	12.10	8	2		
5.00	15.12	5	1		