


Luminaire

Code AA50004_DMX_B
 Name LOT RIFR.SOSP.TRACK.LED R+W NRO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 0 - CH5 255 - CH6 0

Measurem.

Code FTS1700325
 Name LOT RIFR.SOSP.TRACK.LED R+W NRO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 0 - CH5 255 - CH6 0

Luminaire Flux	64.05 lm	Luminaire Power	60.00 W	Efficacy	1.07 lm/W	Efficiency	100.00%
Lamps Flux	64.05 lm	Maximum value	350.53 cd/klm	Position	C=0.00 G=11.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	185 mm 185 mm	Height Height	80 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.026880 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.006503 m2	
Coordinate system Date Measurement Distance		CG 20-03-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 64.05 lm	
Continuous Power=60 Peak Power=85W BLUE L70(6K)=50000 h							
C.I.E. F UTE	51 84 97 100 100 1.00 D			D DIN 5040 B NBN	A40 BZ 4		

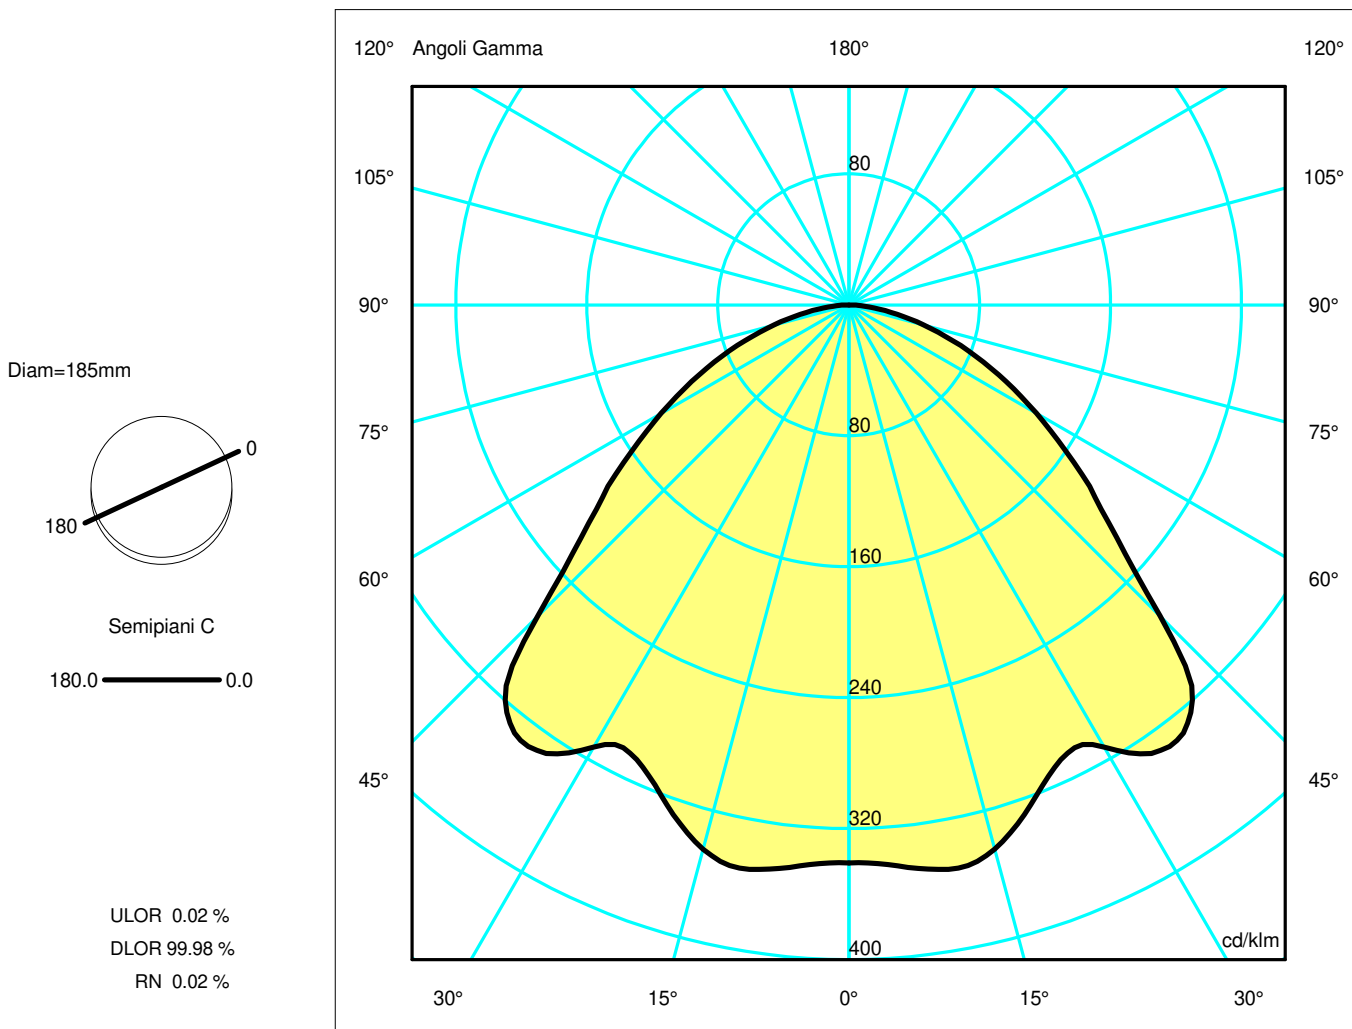

Luminaire

Code AA50004_DMX_B
 Name LOT RIFR.SOSP.TRACK.LED R+W NRO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 0 - CH5 255 - CH6 0

Measurement


Code FTS1700325
 Name LOT RIFR.SOSP.TRACK.LED R+W NRO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 0 - CH5 255 - CH6 0

Luminaire Flux	64.05 lm	Luminaire Power	60.00 W	Efficacy	1.07 lm/W	Efficiency	100.00%
Lamps Flux	64.05 lm	Maximum value	350.53 cd/klm	Position	C=0.00 G=11.00	CG	Rotosymmetrical
Round Luminaire		Diam.	185 mm	Height	80 mm		
Round Luminous Area		Diam.	185 mm	Height	0 mm		
Horizontal Luminous Area	0.026880 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.006503 m2	
Coordinate system	CG			Symmetry Type		Rotosymmetrical	
Date	20-03-2017			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		64.05 lm	
Continuous Power=60 Peak Power=85W BLUE L70(6K)=50000 h							
C.I.E.	51 84 97 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.38	2.76	4.14	5.52	6.90	OC	1.38	2.76	4.14	5.52	6.90
OB	1.38	2.76	4.14	5.52	6.90	OD	1.38	2.76	4.14	5.52	6.90

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	21.83	22.04	22.05	19.63	21.28	17.22	10.75	6.47	3.03	0.63
OB	21.83	22.04	22.05	19.63	21.28	17.22	10.75	6.47	3.03	0.63
OC	21.83	22.04	22.05	19.63	21.28	17.22	10.75	6.47	3.03	0.63
OD	21.83	22.04	22.05	19.63	21.28	17.22	10.75	6.47	3.03	0.63

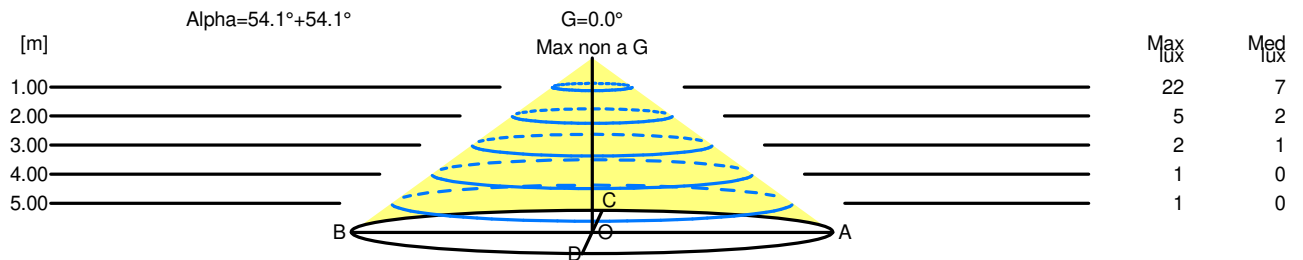

H[m]	D[m]	Max lux	Med lux	Alpha=54.1°+54.1°	G=0.0 Max non a G
1.00	2.76	22	7		
2.00	5.52	5	2		
3.00	8.29	2	1		
4.00	11.05	1	0		
5.00	13.81	1	0		