

Luminaire

Code 1708010A
Name NUBOLI SOSPENSIONE 6X55W

Measur.

Code FTS0001968
Name NUBOLI SOSPENSIONE 6X55W

Efficiency	53.89%	Coordinate system	CG	Total Flux	27000.00 lm
Maximum value	69.94 cd/klm	Position	C=0.00 G=0.00	Rotosymmetrical	
Round Luminaire	Diam.	1600 mm	Height	600 mm	Height
Rectangular Luminous Area	Length	1600 mm	Width	1 mm	0 mm
Horizontal Luminous Area	0.001600 m2	Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.000387 m2	
Date	17-10-2012	Maximum Gamma Angle		180	
Measurement Distance	0.00	Measurement Flux		27000.00 lm	
6x55W 2G11					
C.I.E.	34 63 85 55 54	D DIN 5040	C21		
F UTE	0.30 H + 0.24 T	B NBN	BZ 6		


Diam=1600mm



Semipiani C

180.0 ——— 0.0

ULOR 24.25 %
DLOR 29.64 %
RN 45.00 %

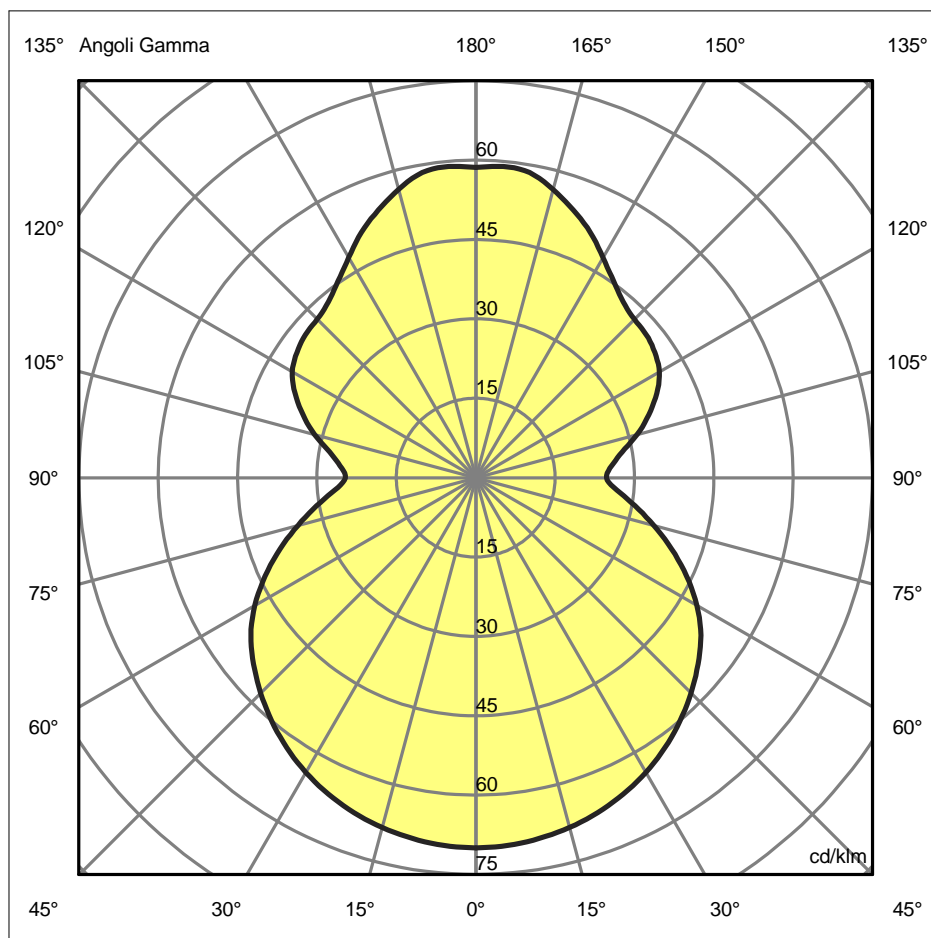

Luminaire

Code 1708010A
Name NUBOLI SOSPENSIONE 6X55W

Measur.

Code FTS0001968
Name NUBOLI SOSPENSIONE 6X55W


Efficiency	53.89%	Coordinate system	CG	Total Flux	27000.00 lm
Maximum value	69.94 cd/klm	Position	C=0.00 G=0.00	Rotosymmetrical	
Round Luminaire	Diam.	1600 mm	Height	600 mm	
Rectangular Luminous Area	Length	1600 mm	Width	1 mm	Height 0 mm
Horizontal Luminous Area	0.001600 m2	Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.000387 m2	
Date	17-10-2012	Maximum Gamma Angle		180	
Measurement Distance	0.00	Measurement Flux		27000.00 lm	
6x55W 2G11					
C.I.E.	34 63 85 55 54	D DIN 5040		C21	
F UTE	0.30 H + 0.24 T	B NBN		BZ 6	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	3.69	7.38	11.08	14.77	18.46	OC	3.69	7.38	11.08	14.77	18.46
OB	3.69	7.38	11.08	14.77	18.46	OD	3.69	7.38	11.08	14.77	18.46

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	1888.38	1883.52	1847.88	1780.65	1681.83	1553.31	1401.57	1186.38	940.41	722.52
OB	1888.38	1883.52	1847.88	1780.65	1681.83	1553.31	1401.57	1186.38	940.41	722.52
OC	1888.38	1883.52	1847.88	1780.65	1681.83	1553.31	1401.57	1186.38	940.41	722.52
OD	1888.38	1883.52	1847.88	1780.65	1681.83	1553.31	1401.57	1186.38	940.41	722.52

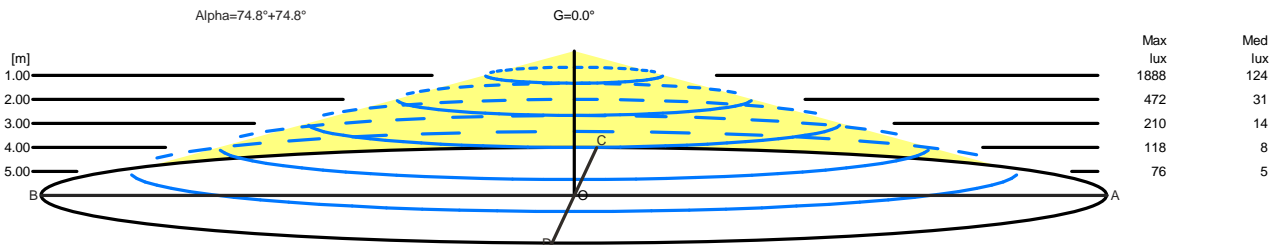

H[m]	D[m]	Max lux	Med lux	Alpha=74.8°+74.8°	G=0.0
1.00	7.38	1888	124		
2.00	14.77	472	31		
3.00	22.15	210	14		
4.00	29.53	118	8		
5.00	36.92	76	5		