

Luminaire

Code T086200
Name OBLIQUE LED BOLLARD H450 14W 3000K ANTRACITE

Measur.

Code FTS1602854
Name OBLIQUE LED BOLLARD H450 14W 3000K ANTRACITE


Luminaire Flux	750.47 lm	Luminaire Power	15.00 W	Efficacy	50.03 lm/W	Efficiency	100.00%
Lamps Flux	750.47 lm	Maximum value	1476.36 cd/klm	Position	C=270.00 G=71.00	CG Sym. on planes 270-90	
Round Luminaire		Diam.	100 mm	Height	160 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°	0.001216 m2		
Coordinate system		CG Roads		Symmetry Type	Sym. on planes 270-90		
Date		05-05-2016		Maximum Gamma Angle	180		
Measurement Distance		0.00		Measurement Flux	750.47 lm		

LED Flux=1387,2lm LED Power=20W Eff=54% EfcLed=69lm/W EfcLum=50,03lm/W Ra=80 SDCM=3 L70(6K)=50000h


C.I.E. 4 23 68 87 100

D DIN 5040

B11



ULOR 12.87 %
DLOR 87.13 %
RN 12.87 %

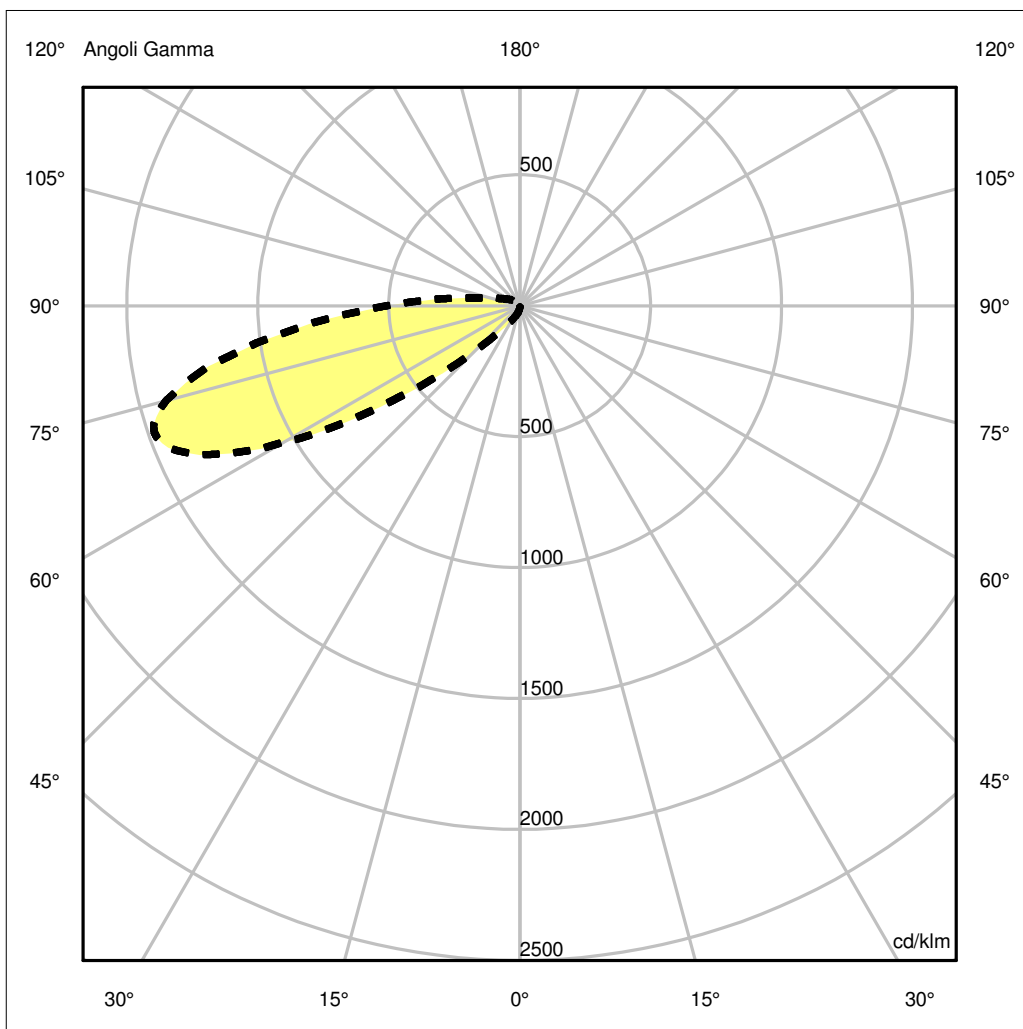

Luminaire							
Code	T086200						
Name	OBLIQUE LED BOLLARD H450 14W 3000K ANTRACITE						
Measur.							
Code	FTS1602854						
Name	OBLIQUE LED BOLLARD H450 14W 3000K ANTRACITE						
Luminaire Flux	750.47 lm	Luminaire Power	15.00 W	Efficacy	50.03 lm/W	Efficiency	100.00%
Lamps Flux	750.47 lm	Maximum value	1476.36 cd/klm	Position	C=270.00 G=71.00	CG Sym. on planes 270-90	
Round Luminaire		Diam.	100 mm	Height	160 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001216 m2	
Coordinate system		CG Roads		Symmetry Type		Sym. on planes 270-90	
Date		05-05-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		750.47 lm	
LED Flux=1387,2lm LED Power=20W Eff=54% EfcLed=69lm/W EfcLum=50,03lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	4 23 68 87 100			D DIN 5040	B11		

Could not find 90270 left beam angle•gamma0180=0

Could not find 90270 left beam angle•gamma0180=0

Could not find 90270 left beam angle•gamma0180=0