


## Luminaire

Code AD64201  
Name PICTO 125 RECESSED FL MF 940 BIANCO

## Measurem.

Code FTS1701950  
Name PICTO 125 RECESSED FL MF 940 BIANCO

Luminaire Flux	3835.08 lm	Luminaire Power	41.00 W	Efficacy	93.54 lm/W	Efficiency	100.00%
Lamps Flux	3835.08 lm	Maximum value	1754.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	125 mm 100 mm	Height Height	140 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.007854 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.001900 m2	
Coordinate system Date Measurement Distance		CG 08-11-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 3835.08 lm	
LED Flux=4998,8lm LED Power=41W Eff=77% EfcLed=122lm/W EfcLum=94lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	91 96 99 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

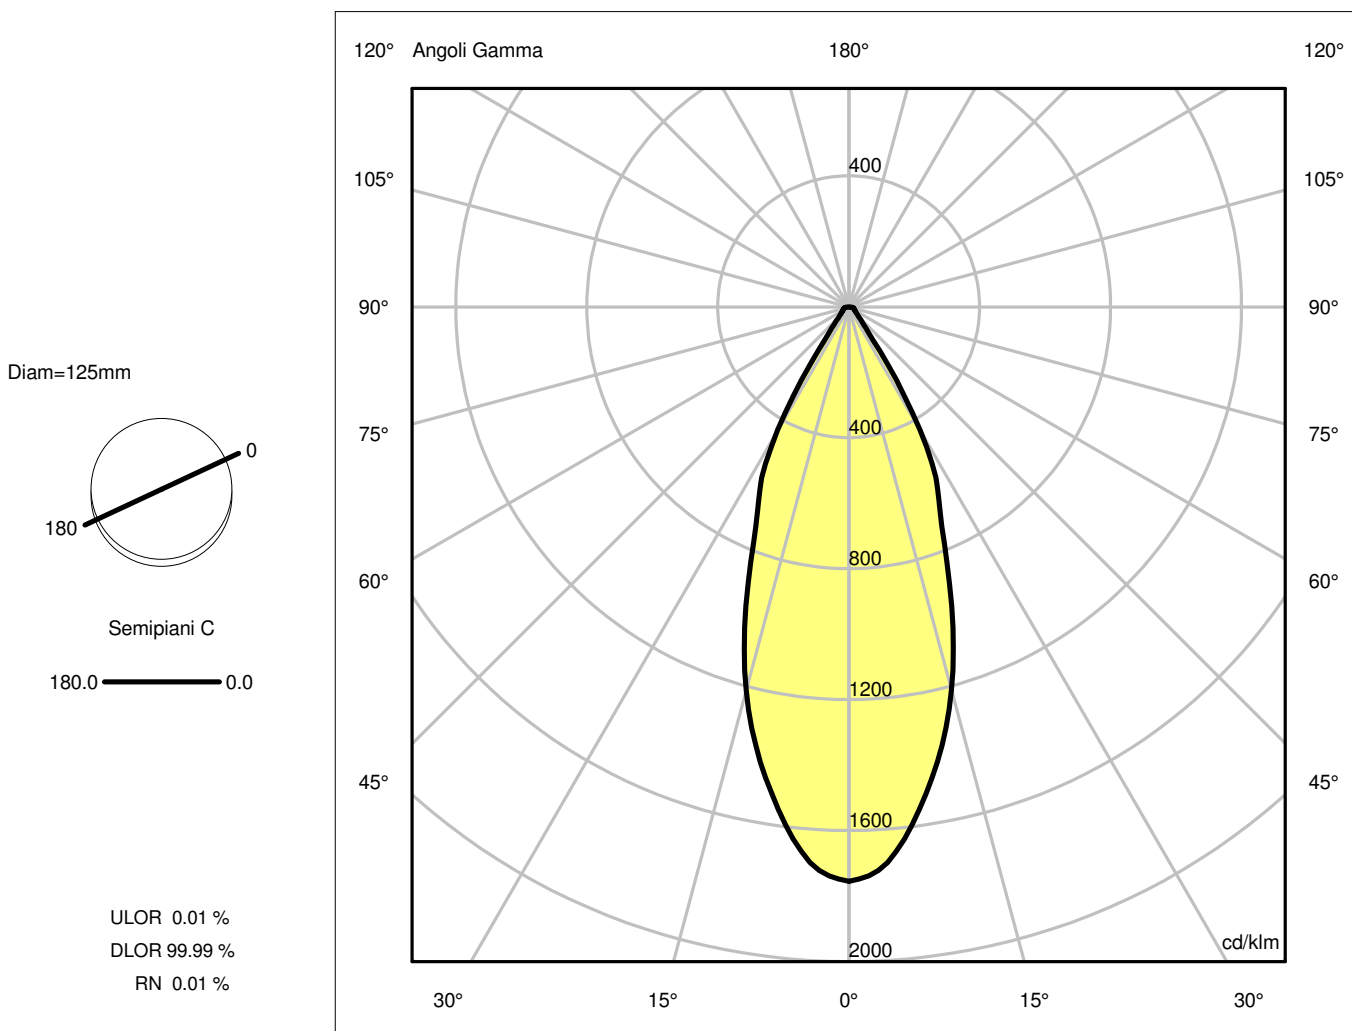

## Luminaire

Code AD64201  
Name PICTO 125 RECESSED FL MF 940 BIANCO

## Measurerm.


Code FTS1701950  
Name PICTO 125 RECESSED FL MF 940 BIANCO

Luminaire Flux	3835.08 lm	Luminaire Power	41.00 W	Efficacy	93.54 lm/W	Efficiency	100.00%
Lamps Flux	3835.08 lm	Maximum value	1754.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	125 mm	Height	140 mm		
Round Luminous Area		Diam.	100 mm	Height	0 mm		
Horizontal Luminous Area	0.007854 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.001900 m2	
Coordinate system	CG			Symmetry Type		Rotosymmetrical	
Date	08-11-2017			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		3835.08 lm	
LED Flux=4998,8lm LED Power=41W Eff=77% EfcLed=122lm/W EfcLum=94lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	91 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.37	0.74	1.11	1.48	1.85	OC	0.37	0.74	1.11	1.48	1.85
OB	0.37	0.74	1.11	1.48	1.85	OD	0.37	0.74	1.11	1.48	1.85

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6728.85	6402.37	4647.60	2498.01	626.94	163.07	94.34	72.07	54.85	19.37
OB	6728.85	6402.37	4647.60	2498.01	626.94	163.07	94.34	72.07	54.85	19.37
OC	6728.85	6402.37	4647.60	2498.01	626.94	163.07	94.34	72.07	54.85	19.37
OD	6728.85	6402.37	4647.60	2498.01	626.94	163.07	94.34	72.07	54.85	19.37

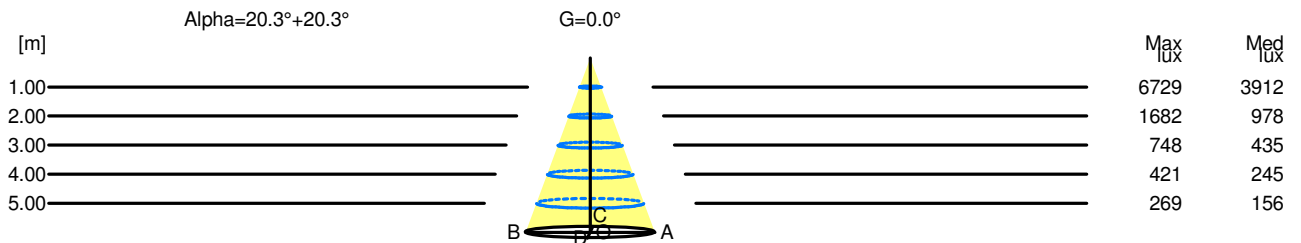

H[m]	D[m]	Max lux	Med lux	Alpha=20.3°+20.3°	G=0.0
1.00	0.74	6729	3912		
2.00	1.48	1682	978		
3.00	2.23	748	435		
4.00	2.97	421	245		
5.00	3.71	269	156		