

Luminaire

Code AD02504
Name Picto 70 New led Verticale DIM Nero 4000K wide flood

Measurem.

Code FTS1602993
Name Picto 70 New led Verticale DIM Nero 4000K wide flood


Luminaire Flux	1833.75 lm	Luminaire Power	20.00 W	Efficacy	91.69 lm/W	Efficiency	100.00%
Lamps Flux	1833.75 lm	Maximum value	1580.38 cd/klm	Position	C=0.00 G=2.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam.	70 mm	Height	100 mm		
		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area	0.000962 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.000233 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	29-08-2017			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	1833.75 lm		

LED Flux=2108lm LED Power=17,5W Eff=86,99% EfcLed=120lm/W EfcLum=92lm/W Ra=90 SDCM=3 L70(6K)=60000h

C.I.E. 97 99 100 100 100
F UTE 1.00 A

D DIN 5040 A60
B NBN BZ 1


Diam=70mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

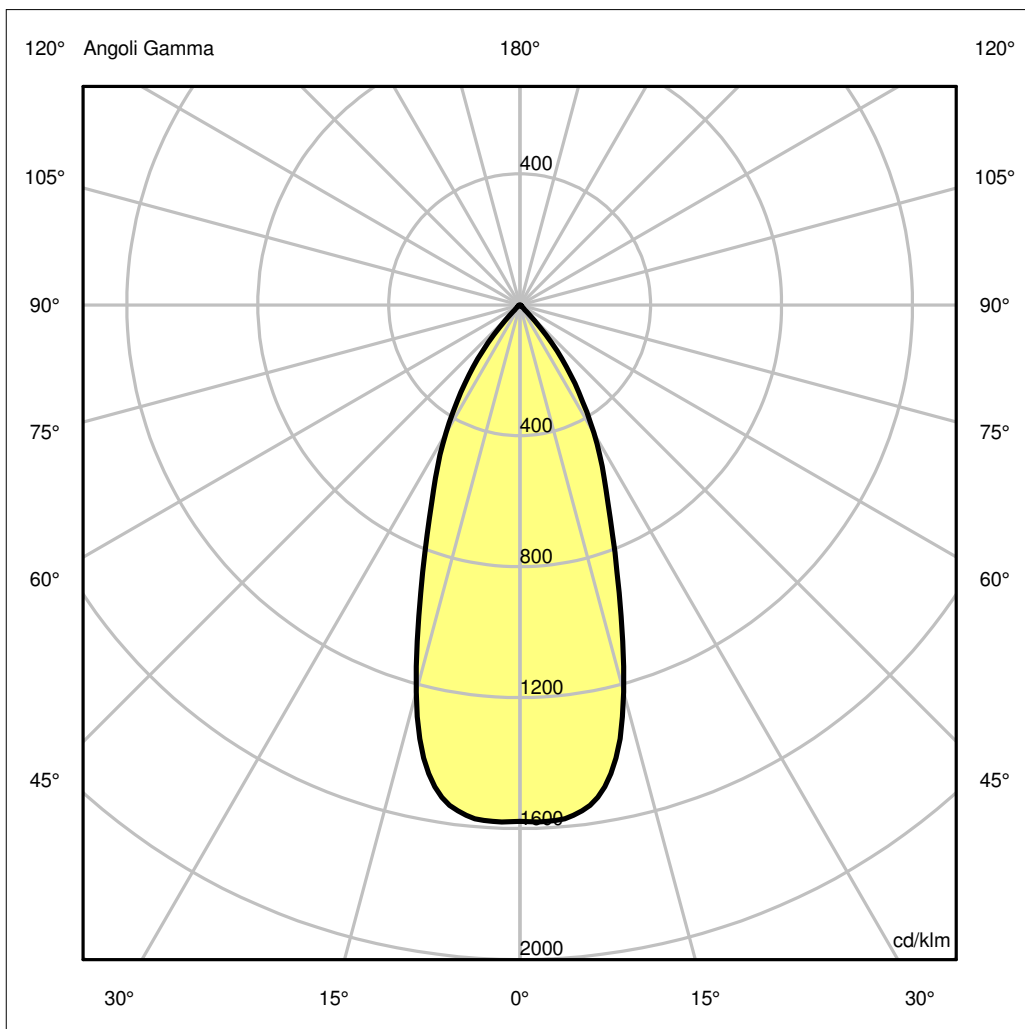

Luminaire

Code AD02504
Name Picto 70 New led Verticale DIM Nero 4000K wide flood

Measur.

Code FTS1602993
Name Picto 70 New led Verticale DIM Nero 4000K wide flood


Luminaire Flux	1833.75 lm	Luminaire Power	20.00 W	Efficacy	91.69 lm/W	Efficiency	100.00%
Lamps Flux	1833.75 lm	Maximum value	1580.38 cd/klm	Position	C=0.00 G=2.00	CG	Rotosymmetrical
Round Luminaire		Diam.	70 mm	Height	100 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area	0.000962 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.000233 m2	
Coordinate system	CG			Symmetry Type		Rotosymmetrical	
Date	29-08-2017			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		1833.75 lm	
LED Flux=2108lm LED Power=17,5W Eff=86,99% EfcLed=120lm/W EfcLum=92lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.39	0.78	1.17	1.57	1.96	OC	0.39	0.78	1.17	1.57	1.96
OB	0.39	0.78	1.17	1.57	1.96	OD	0.39	0.78	1.17	1.57	1.96

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	2892.75	2888.77	2244.76	1144.18	537.51	55.26	10.52	5.35	3.30	1.40
OB	2892.75	2888.77	2244.76	1144.18	537.51	55.26	10.52	5.35	3.30	1.40
OC	2892.75	2888.77	2244.76	1144.18	537.51	55.26	10.52	5.35	3.30	1.40
OD	2892.75	2888.77	2244.76	1144.18	537.51	55.26	10.52	5.35	3.30	1.40

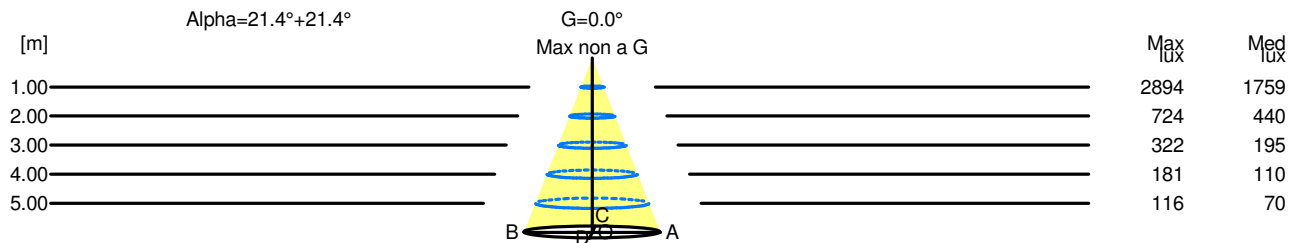

H[m]	D[m]	Max lux	Med lux	Alpha=21.4°+21.4°	G=0.0°	Max non a G
1.00	0.78	2894	1759			
2.00	1.57	724	440			
3.00	2.35	322	195			
4.00	3.13	181	110			
5.00	3.91	116	70			