

## Luminaire

Code 1237010A  
Name Pirce MINI sospensione HALO BIANCO

## Measurment.

Code FTS1502566  
Name Pirce MINI sospensione HALO BIANCO


Luminaire Flux	3686 lm	Luminaire Power	330.0 W	Efficacy	11.171 lm/W	Efficiency	64.48%
Source Flux	5717 lm	Maximum value	360.92 cd/klm	Position	C=230.00 G=158.00	CG	Asymmetrical
Round Luminaire		Diam.	470 mm	Height	230 mm		
Round Luminous Area		Diam.	470 mm	Height	230 mm		
Horizontal Luminous Area			0.173494 m2	Emitting area on Plane 180°			0.108100 m2
Emitting area on Plane 0°			0.108100 m2	Emitting area on Plane 270°			0.108100 m2
Emitting area on Plane 90°			0.108100 m2	Glare area at 76°			0.146861 m2
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		15-06-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5717 lm	

Lampada alogena lineare 330W R7S 230V


C.I.E. 39 68 89 22 64  
F UTE 0.14 G + 0.50 T

D DIN 5040  
B NBN

D23  
BZ 6 / 0.8 / BZ 5 / 1 / BZ 6

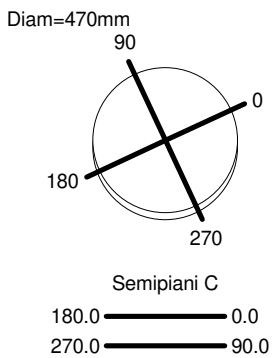

ULOR 50.42 %  
DLOR 14.06 %  
RN 78.19 %

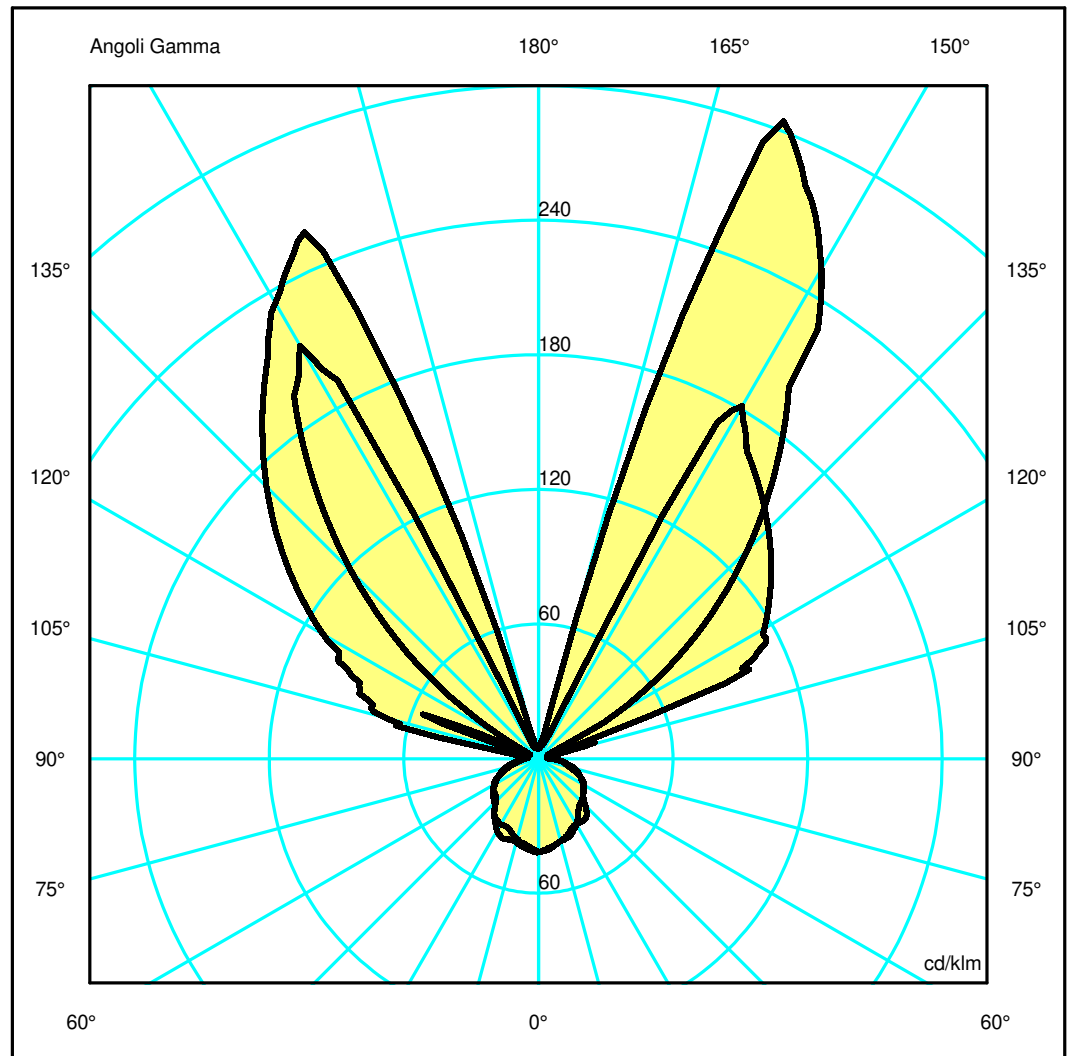

## Luminaire

Code 1237010A  
Name Pirce MINI sospensione HALO BIANCO

## Measurement


Code FTS1502566  
Name Pirce MINI sospensione HALO BIANCO

Luminaire Flux	3686 lm	Luminaire Power	330.0 W	Efficacy	11.171 lm/W	Efficiency	64.48%
Source Flux	5717 lm	Maximum value	360.92 cd/klm	Position	C=230.00 G=158.00	CG	Asymmetrical
Round Luminaire		Diam.	470 mm	Height	230 mm		
Round Luminous Area		Diam.	470 mm	Height	230 mm		
Horizontal Luminous Area		0.173494 m <sup>2</sup>		Emitting area on Plane 180°		0.108100 m <sup>2</sup>	
Emitting area on Plane 0°		0.108100 m <sup>2</sup>		Emitting area on Plane 270°		0.108100 m <sup>2</sup>	
Emitting area on Plane 90°		0.108100 m <sup>2</sup>		Glare area at 76°		0.146861 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		15-06-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5717 lm	
Lampada alogena lineare 330W R7S 230V							
C.I.E.	39 68 89 22 64			D DIN 5040	D23		
F UTE	0.14 G + 0.50 T			B NBN	BZ 6 / 0.8 / BZ 5 / 1 / BZ 6		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.07	0.14	0.21	0.29	0.36	OC	0.82	1.65	2.47	3.30	4.12
OB	0.48	0.96	1.45	1.93	2.41	OD	1.65	3.30	4.95	6.61	8.26

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	27.94	26.53	36.02	110.17	936.61	827.97	719.33	605.94	69.00	32.82
OB	27.94	27.04	29.33	59.91	1074.98	673.82	272.66	26.07	62.77	27.67
OC	27.94	36.99	373.55	1610.65	1106.01	753.23	400.44	30.93	120.63	20.30
OD	27.94	25.50	51.85	1453.55	1210.90	980.31	749.73	537.63	405.39	38.25

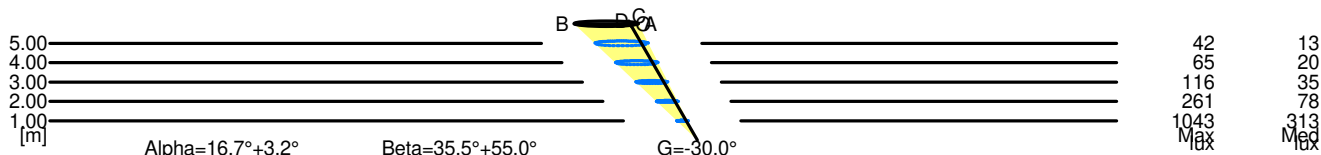

5.00	2.77	42	13	
4.00	2.21	65	20	
3.00	1.66	116	35	
2.00	1.11	261	78	
1.00	0.55	1043	313	
H[m]	D[m]	Max lux	Med lux	Alpha=16.7°+3.2°      G=-30.0

5.00	12.38	42	13	
4.00	9.90	65	20	
3.00	7.43	116	35	
2.00	4.95	261	78	
1.00	2.48	1043	313	
H[m]	D[m]	Max lux	Med lux	Beta=55.0°+35.5°      G=0.0