


Luminaire

Code AF24901+AF95201
 Name SHARP RECESSED TRIM 16X 48W 927 VERY WIDE FLOOD WHITE EXT.DRV + SCREEN 4X WHITE

Measurem.

Code FTS1902038
 Name SHARP RECESSED TRIM 16X 48W 927 VERY WIDE FLOOD WHITE EXT.DRV + SCREEN 4X WHITE

Luminaire Flux	2924.44 lm	Luminaire Power	44.00 W	Efficacy	66.46 lm/W	Efficiency	100.00%
Lamps Flux	2924.44 lm	Maximum value	1406.35 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	612 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	592 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.021904 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.005299 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-07-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2924.44 lm	
LED Flux=3984.8lm LED Power=44W Eff=73% EfcLed=91lm/W EfcLum=66lm/W CCT=2700K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

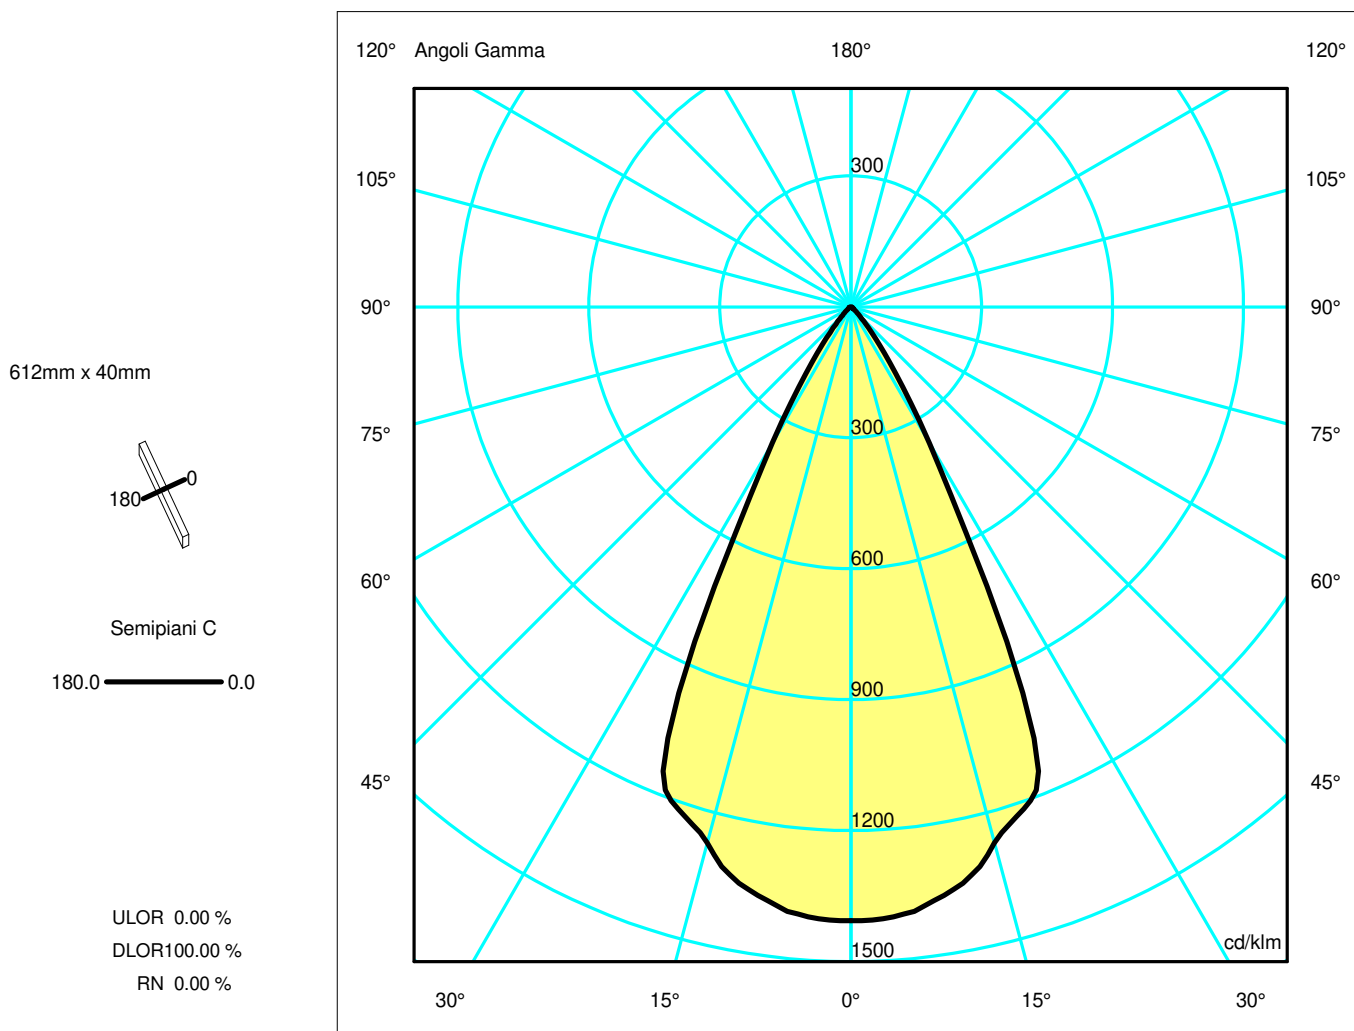

Luminaire

Code AF24901+AF95201
 Name SHARP RECESSED TRIM 16X 48W 927 VERY WIDE FLOOD WHITE EXT.DRV + SCREEN 4X WHITE

Measurerm.


Code FTS1902038
 Name SHARP RECESSED TRIM 16X 48W 927 VERY WIDE FLOOD WHITE EXT.DRV + SCREEN 4X WHITE

Luminaire Flux	2924.44 lm	Luminaire Power	44.00 W	Efficacy	66.46 lm/W	Efficiency	100.00%
Lamps Flux	2924.44 lm	Maximum value	1406.35 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	612 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	592 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.021904 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.005299 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-07-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2924.44 lm	
LED Flux=3984.8lm LED Power=44W Eff=73% EfcLed=91lm/W EfcLum=66lm/W CCT=2700K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.49	0.98	1.47	1.96	2.45	OC	0.49	0.98	1.47	1.96	2.45
OB	0.49	0.98	1.47	1.96	2.45	OD	0.49	0.98	1.47	1.96	2.45

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4112.77	4083.42	3717.02	2474.43	453.43	78.82	18.46	11.80	7.75	2.89
OB	4112.77	4083.42	3717.02	2474.43	453.43	78.82	18.46	11.80	7.75	2.89
OC	4112.77	4083.42	3717.02	2474.43	453.43	78.82	18.46	11.80	7.75	2.89
OD	4112.77	4083.42	3717.02	2474.43	453.43	78.82	18.46	11.80	7.75	2.89

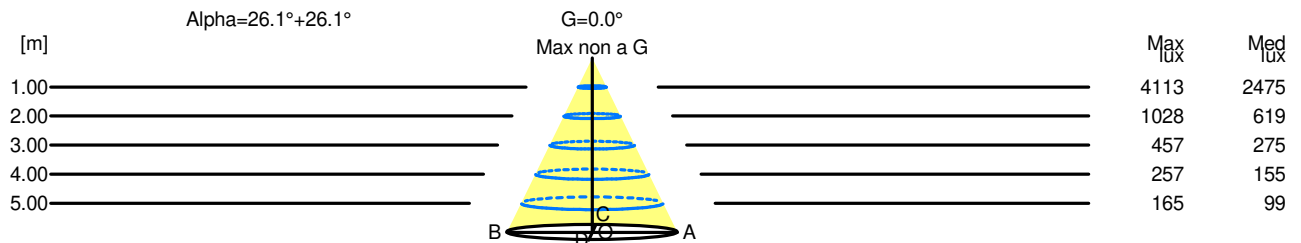

H[m]	D[m]	Max lux	Med lux	Alpha=26.1°+26.1°	G=0.0 Max non a G
1.00	0.98	4113	2475		
2.00	1.96	1028	619		
3.00	2.94	457	275		
4.00	3.91	257	155		
5.00	4.89	165	99		