

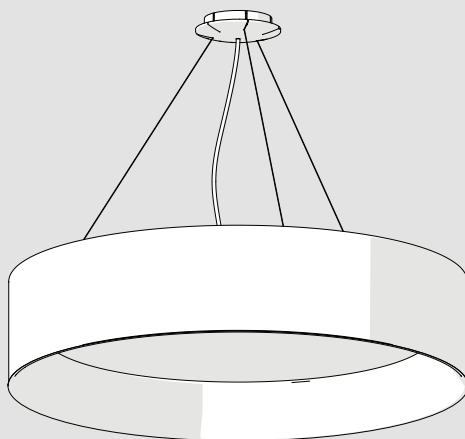
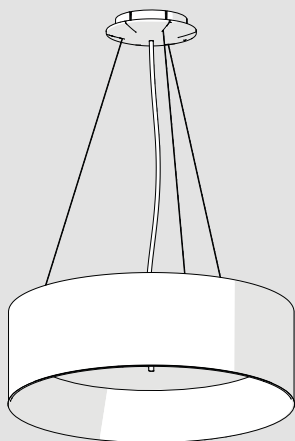

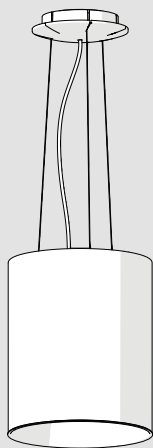












TAGORA SUSPENSION

design
S./R. Cornelissen






ONLY FOR LED
(GU10) ↓

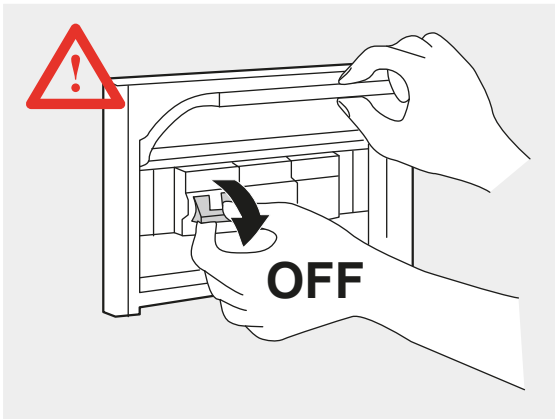






TAGORA SUSPENSION \varnothing 80

*GWFI = Glow Wire Flammability Index

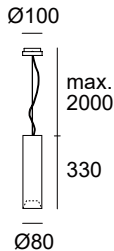


IP20	LED1	LED	3000K	flood
			4000K	wide flood
very wide flood				
flood				
very wide flood				
GWFI* 960°C	LED (GU10)	  1,00 m	LED (GU10) 220-240V, max 8W Max overall length: 81 mm	

TAGORA SUSPENSION \varnothing 270

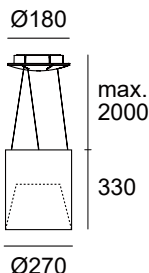


LED dimmable DALI - SwitchDim			3000K	spot
IP20	GWFI* 960°C	LED1		flood
			4000K	spot
				flood

TAGORA SUSPENSION \varnothing 570



LED direct LED direct+indirect		
IP20	GWFI* 650°C	LED1


TAGORA SUSPENSION \varnothing 970



LED direct LED direct+indirect		
IP20	GWFI* 650°C	LED1





TAGORA SUSPENSION Ø 80

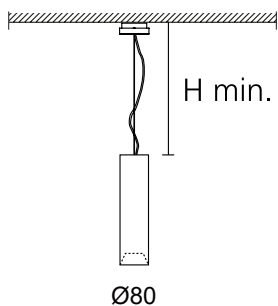


Code	H min.
LED	20 cm


2

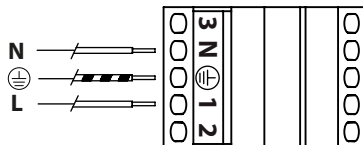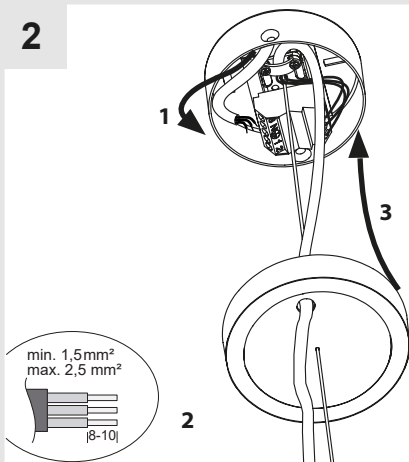

DALI

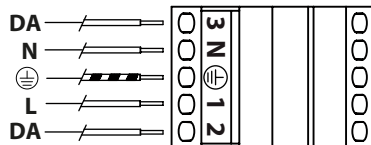


1

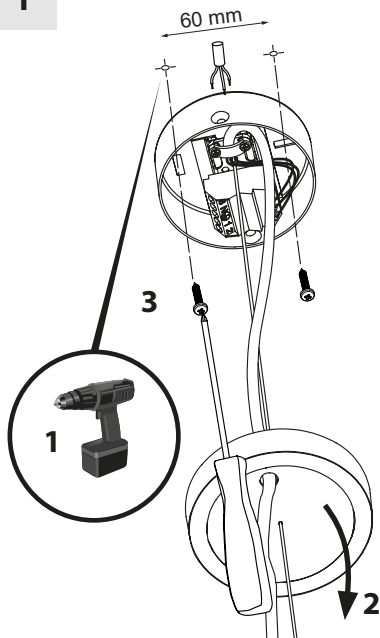

3


GU10

LED

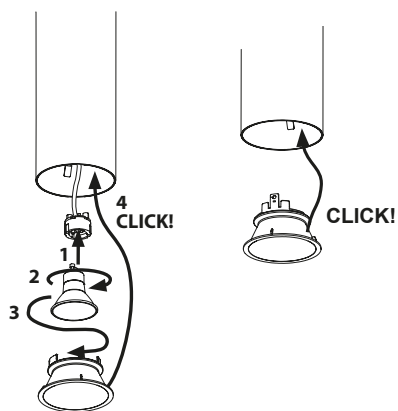





TAGORA SUSPENSION \varnothing 270 - \varnothing 570 - \varnothing 970

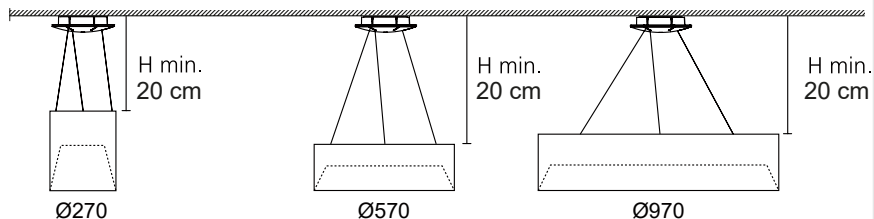


1

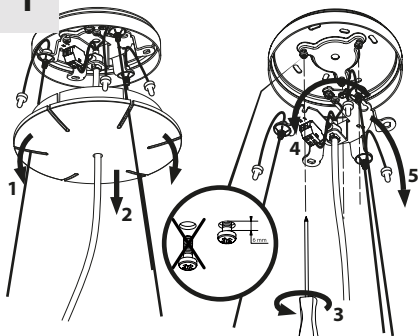


2

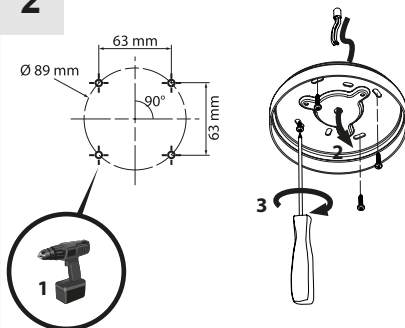

3


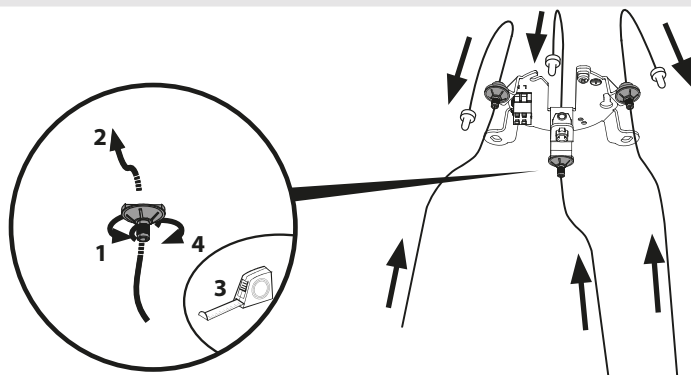


4

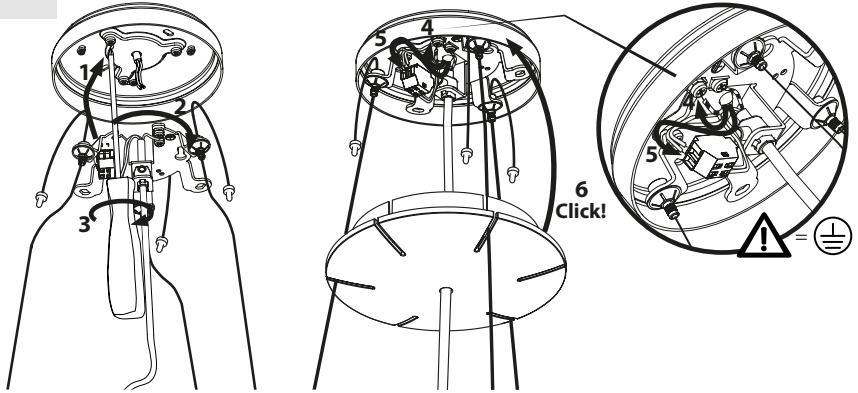




5a

TAGORA 270/570/970 LED
dimnable Dali / Dali dimmable

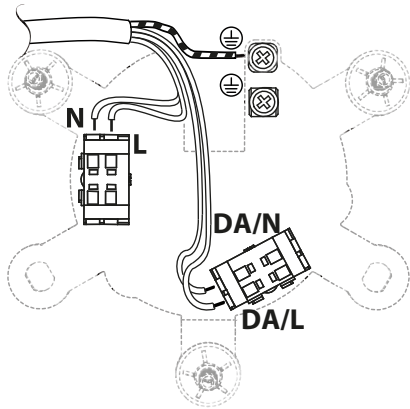

5b

TAGORA 270 LED
dimnable SwitchcDim / SwitchDim dimmable

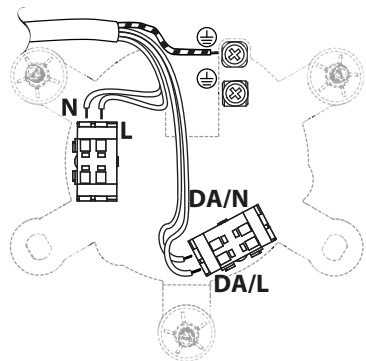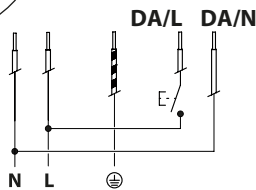



Artemide Spa

via Bergamo, 18
20006 Pregnana M.se (MI)
ITALIA

Tel. +39 02 935 181
Fax +39 02 935 90 254
Fax +39 02 935 90 496

www.artemide.com

VAT IT00846890150