

Luminaire


Code A008100
Name TIZIO MICRO TAVOLO LUCIDA

Measurement

Code FTS002582-A
Name TIZIO MICRO TAVOLO LUCIDA

Luminaire Flux	150 lm	Luminaire Power	2.7 W	Efficacy	55.715 lm/W	Efficiency	47.76%
Source Flux	315 lm	Maximum value	169.07 cd/klm	Position	C=0.00 G=15.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	61 mm	Width	95 mm	Height	55 mm
Rectangular Luminous Area		Length	62 mm	Width	65 mm	Height	0 mm
Horizontal Luminous Area		0.004030 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°	0.000975 m2		
Coordinate system		CG			Symmetry Type	Sym. on planes 0-180	
Date		18-01-2022			Maximum Gamma Angle	180	
Measurement Distance		0.00			Measurement Flux	315 lm	
Lamping=LED 1x2.7W (G4) CCT=2700K CRI=80							
C.I.E.	49 84 98 100 48			D DIN 5040	A30		
F UTE	0.48 E			B NBN	BZ 4		


61 mm x 95 mm



Semipiani C

180.0 ——— 0.0
270.0 ——— 90.0

ULOR 0.01 %
DLOR 47.75 %
RN 0.01 %

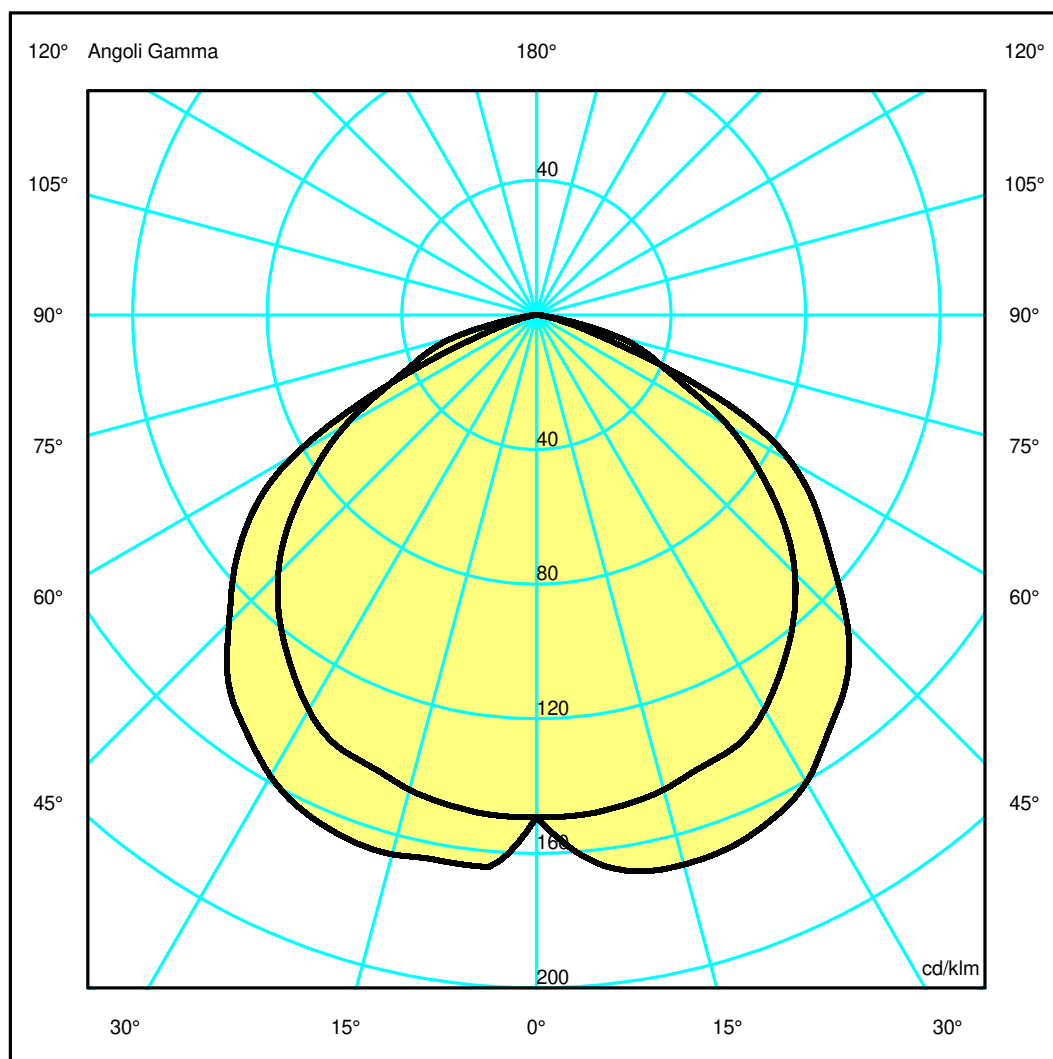

Luminaire

Code A008100
Name TIZIO MICRO TAVOLO LUCIDA

Measurment.


Code FTS002582-A
Name TIZIO MICRO TAVOLO LUCIDA

Luminaire Flux	150 lm	Luminaire Power	2.7 W	Efficacy	55.715 lm/W	Efficiency	47.76%
Source Flux	315 lm	Maximum value	169.07 cd/klm	Position	C=0.00 G=15.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	61 mm	Width	95 mm	Height	55 mm
Rectangular Luminous Area		Length	62 mm	Width	65 mm	Height	0 mm
Horizontal Luminous Area		0.004030 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000975 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		18-01-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		315 lm	
Lamping=LED 1x2.7W (G4) CCT=2700K CRI=80							
C.I.E.	49 84 98 100 48			D DIN 5040	A30		
F UTE	0.48 E			B NBN	BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.79	3.57	5.36	7.14	8.93	OC	1.37	2.73	4.10	5.47	6.83
OB	1.71	3.42	5.14	6.85	8.56	OD	1.37	2.73	4.10	5.47	6.83

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	47.03	50.90	53.26	52.12	47.63	41.18	32.06	19.83	3.49	0.38
OB	47.03	51.89	52.27	51.36	47.48	40.72	32.59	14.89	2.13	0.15
OC	47.03	46.99	46.00	44.43	40.12	34.20	25.50	15.00	7.94	0.72
OD	47.03	46.99	46.00	44.43	40.12	34.20	25.50	15.00	7.94	0.72

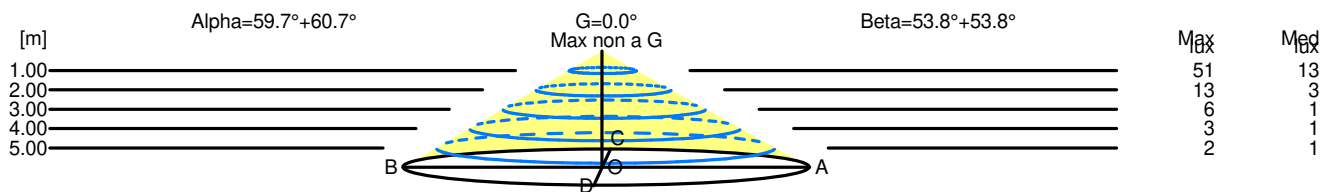

H[m]	D[m]	Max lux	Med lux	Alpha=59.7°+60.7°	G=0.0° Max non a G
1.00	3.50	51	13		
2.00	7.00	13	3		
3.00	10.49	6	1		
4.00	13.99	3	1		
5.00	17.49	2	1		

H[m]	D[m]	Max lux	Med lux	Beta=53.8°+53.8°	G=0.0° Max non a G
1.00	2.73	51	13		
2.00	5.47	13	3		
3.00	8.20	6	1		
4.00	10.93	3	1		
5.00	13.67	2	1		