

## Luminaire

Code BW40004+AP91400  
 Name VECTOR SPOT 55 CHANNEL 14W 2700K SP BLK + ANTI DAZZLE LOUVRE

## Measurem.

Code FTS2300106  
 Name VECTOR SPOT 55 CHANNEL 14W 2700K SP BLK + ANTI DAZZLE LOUVRE

Luminaire Flux	675 lm	Luminaire Power	14.0 W	Efficacy	48.201 lm/W	Efficiency	100.00%
Source Flux	675 lm	Maximum value	9643.54 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	109 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		24-02-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		675 lm	
LED Flux=1594lm LED Power=14W Eff=42% EfcLed=114lm/W EfcLum=48lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	100	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

Diam=55mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

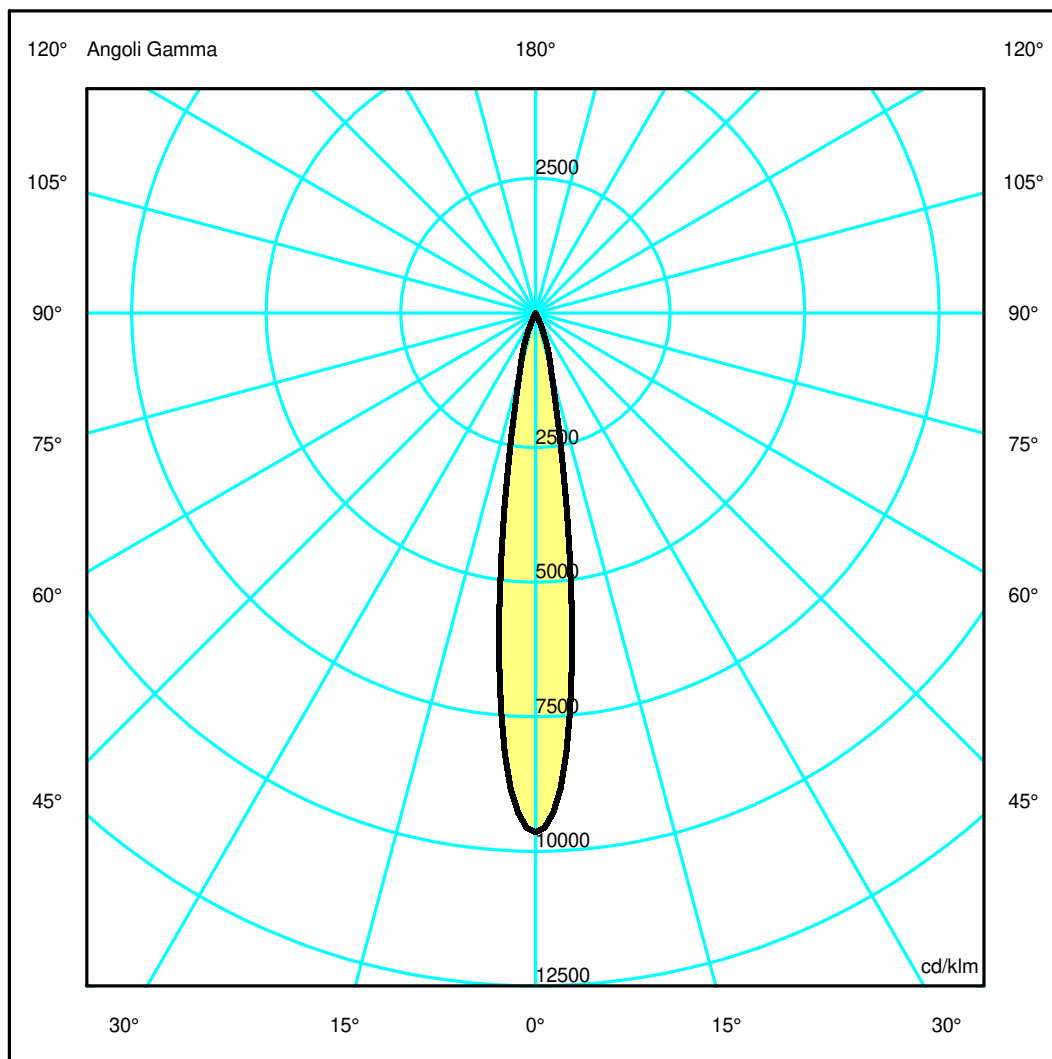

## Luminaire

Code BW40004+AP91400  
 Name VECTOR SPOT 55 CHANNEL 14W 2700K SP BLK + ANTI DAZZLE LOUVRE

## Measurerm.


Code FTS2300106  
 Name VECTOR SPOT 55 CHANNEL 14W 2700K SP BLK + ANTI DAZZLE LOUVRE

Luminaire Flux	675 lm	Luminaire Power	14.0 W	Efficacy	48.201 lm/W	Efficiency	100.00%
Source Flux	675 lm	Maximum value	9643.54 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	109 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		24-02-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		675 lm	
LED Flux=1594lm LED Power=14W Eff=42% EfcLed=114lm/W EfcLum=48lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.14	0.27	0.41	0.54	0.68	OC	0.14	0.27	0.41	0.54	0.68
OB	0.14	0.27	0.41	0.54	0.68	OD	0.14	0.27	0.41	0.54	0.68

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	6507.65	4989.78	764.64	95.91	9.34	2.67	0.95	0.30	0.24	0.18
OB	6507.65	4989.78	764.64	95.91	9.34	2.67	0.95	0.30	0.24	0.18
OC	6507.65	4989.78	764.64	95.91	9.34	2.67	0.95	0.30	0.24	0.18
OD	6507.65	4989.78	764.64	95.91	9.34	2.67	0.95	0.30	0.24	0.18

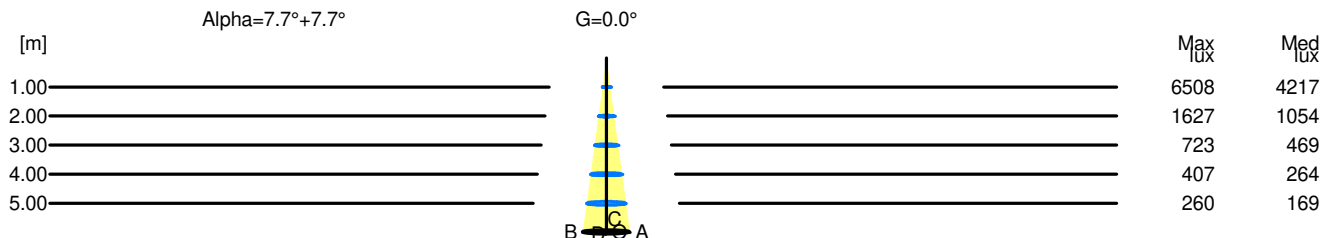

H[m]	D[m]	Max lux	Med lux	Alpha=7.7°+7.7°	G=0.0
1.00	0.27	6508	4217		
2.00	0.54	1627	1054		
3.00	0.82	723	469		
4.00	1.09	407	264		
5.00	1.36	260	169		