

## Luminaire

Code AP10320  
Name VECTOR 55 MAGNET 930 WF DALI BR.BRONZE

## Measurem.

Code FTS1800188  
Name VECTOR 55 MAGNET 930 WF DALI BR.BRONZE

Luminaire Flux	1787 lm	Luminaire Power	23.0 W	Efficacy	77.685 lm/W	Efficiency	100.00%
Source Flux	1787 lm	Maximum value	3574.81 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-09-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1787 lm	
LED Flux=2346lm LED Power=21W Eff=76% EfcLed=110lm/W EfcLum=78lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

Diam=55mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

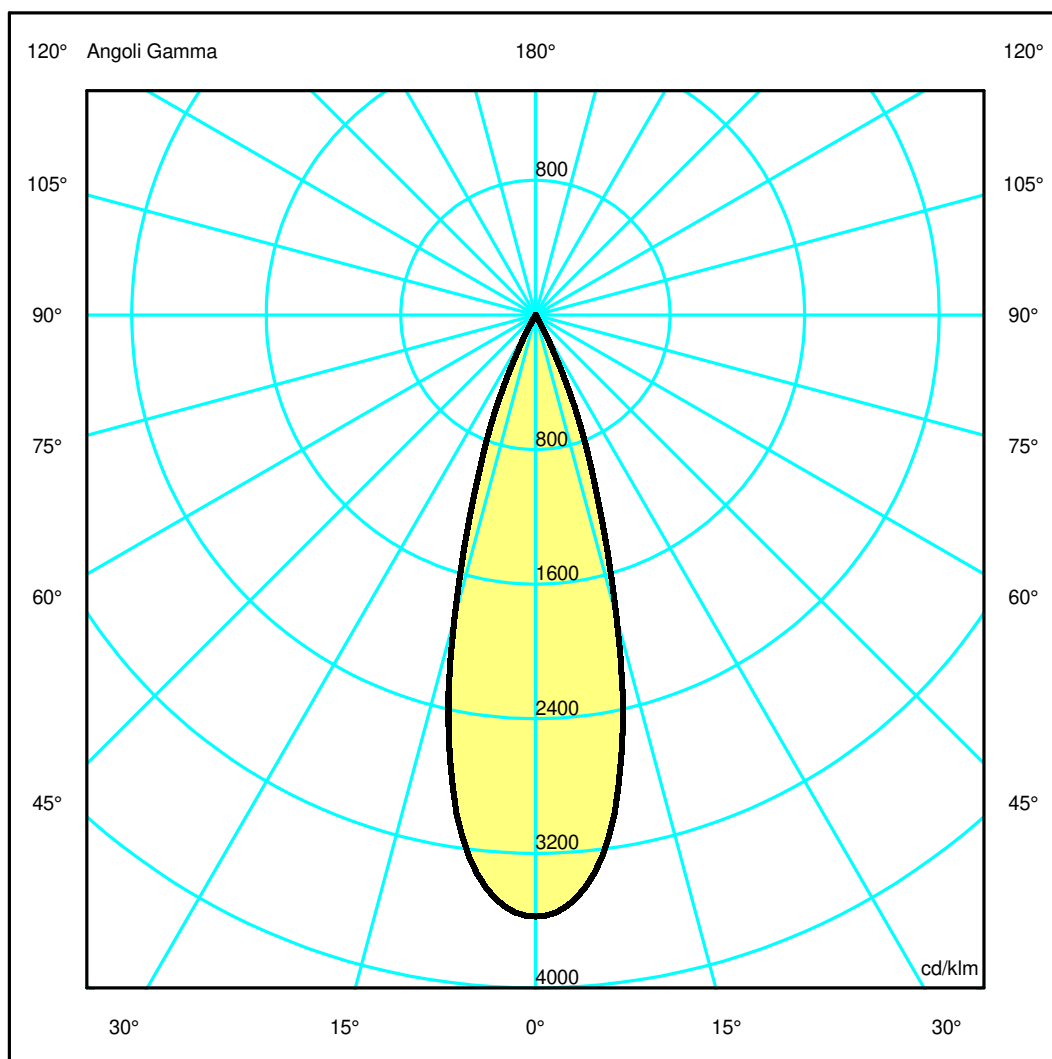

## Luminaire

Code AP10320  
Name VECTOR 55 MAGNET 930 WF DALI BR.BRONZE

## Measur.


Code FTS1800188  
Name VECTOR 55 MAGNET 930 WF DALI BR.BRONZE

Luminaire Flux	1787 lm	Luminaire Power	23.0 W	Efficacy	77.685 lm/W	Efficiency	100.00%
Source Flux	1787 lm	Maximum value	3574.81 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.000402 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-09-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1787 lm	
LED Flux=2346lm LED Power=21W Eff=76% EfcLed=110lm/W EfcLum=78lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.27	0.55	0.82	1.10	1.37	OC	0.27	0.55	0.82	1.10	1.37
OB	0.27	0.55	0.82	1.10	1.37	OD	0.27	0.55	0.82	1.10	1.37

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	6387.34	6098.59	3321.62	641.03	17.31	6.11	3.35	2.40	1.46	0.54
OB	6387.34	6098.59	3321.62	641.03	17.31	6.11	3.35	2.40	1.46	0.54
OC	6387.34	6098.59	3321.62	641.03	17.31	6.11	3.35	2.40	1.46	0.54
OD	6387.34	6098.59	3321.62	641.03	17.31	6.11	3.35	2.40	1.46	0.54

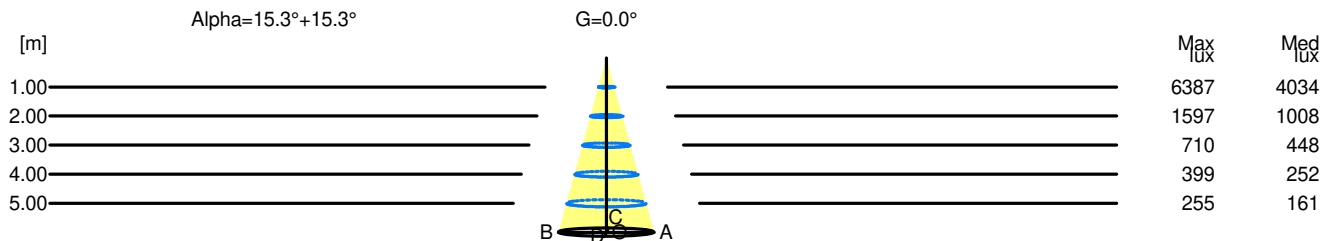

H[m]	D[m]	Max lux	Med lux	Alpha=15.3°+15.3°	G=0.0
1.00	0.55	6387	4034		
2.00	1.10	1597	1008		
3.00	1.65	710	448		
4.00	2.19	399	252		
5.00	2.74	255	161		