


Luminaire

Code AP11301
Name VECTOR 55 MAGNET 927 WF DALI BCO

Measurerm.

Code FTS1801592
Name VECTOR 55 MAGNET 927 WF DALI BCO

Luminaire Flux	1717 lm	Luminaire Power	23.0 W	Efficacy	74.639 lm/W	Efficiency	100.00%
Source Flux	1717 lm	Maximum value	3574.81 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-09-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1717 lm	
LED Flux=2254lm LED Power=21W Eff=76% EfcLed=105lm/W EfcLum=75lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

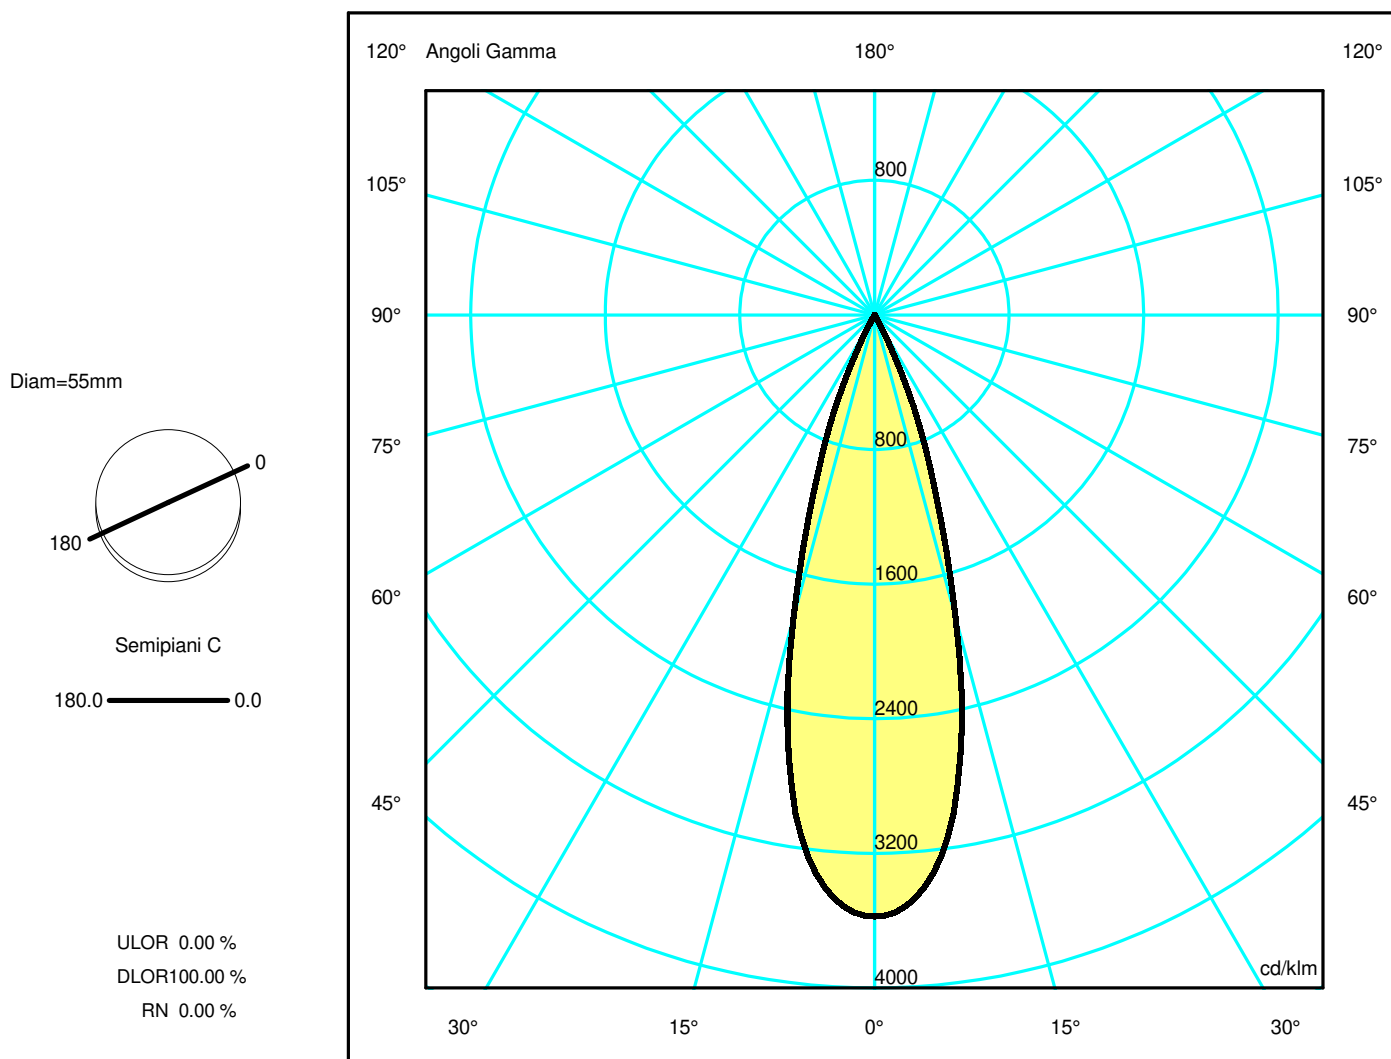

Luminaire

Code AP11301
Name VECTOR 55 MAGNET 927 WF DALI BCO

Measurerm.


Code FTS1801592
Name VECTOR 55 MAGNET 927 WF DALI BCO

Luminaire Flux	1717 lm	Luminaire Power	23.0 W	Efficacy	74.639 lm/W	Efficiency	100.00%
Source Flux	1717 lm	Maximum value	3574.81 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.000402 m ²	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-09-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1717 lm	
LED Flux=2254lm LED Power=21W Eff=76% EfcLed=105lm/W EfcLum=75lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100		D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.27	0.55	0.82	1.10	1.37	OC	0.27	0.55	0.82	1.10	1.37
OB	0.27	0.55	0.82	1.10	1.37	OD	0.27	0.55	0.82	1.10	1.37

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6136.85	5859.42	3191.36	615.90	16.63	5.87	3.22	2.31	1.40	0.52
OB	6136.85	5859.42	3191.36	615.90	16.63	5.87	3.22	2.31	1.40	0.52
OC	6136.85	5859.42	3191.36	615.90	16.63	5.87	3.22	2.31	1.40	0.52
OD	6136.85	5859.42	3191.36	615.90	16.63	5.87	3.22	2.31	1.40	0.52

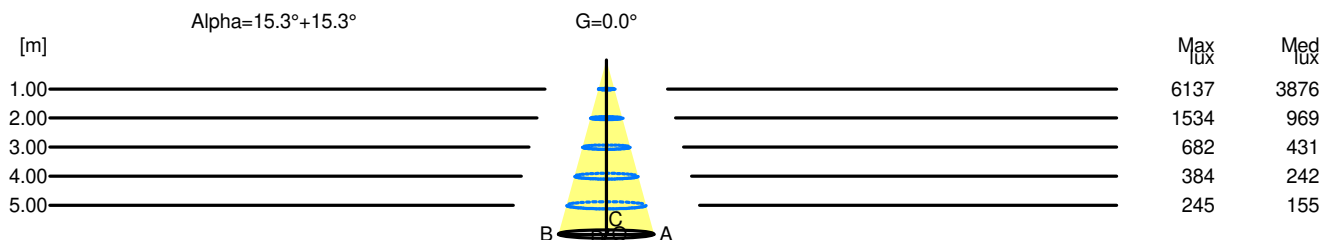

H[m]	D[m]	Max lux	Med lux	Alpha=15.3°+15.3°	G=0.0
1.00	0.55	6137	3876		
2.00	1.10	1534	969		
3.00	1.65	682	431		
4.00	2.19	384	242		
5.00	2.74	245	155		