


## Luminaire

Code AN10320+AP91400  
 Name VECTOR 55 TRACK 930 WF ND BR.BRONZE + ANTI-DAZZLE LOUVRE

## Measurem.

Code FTS2001147  
 Name VECTOR 55 TRACK 930 WF ND BR.BRONZE + ANTI-DAZZLE LOUVRE

Luminaire Flux	1290.30 lm	Luminaire Power	25.00 W	Efficacy	51.61 lm/W	Efficiency	100.00%
Lamps Flux	1290.30 lm	Maximum value	3652.12 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 55 mm Diam. 47 mm	Height	130 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001735 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.000000 m2 0.000000 m2 0.000420 m2		
Coordinate system	CG	Symmetry Type			Rotosymmetrical		
Date	09-05-2018	Maximum Gamma Angle			180		
Measurement Distance	0.00	Measurement Flux			1290.30 lm		
LED Flux=2346lm LED Power=21W Eff=55% EfcLed=112lm/W EfcLum=52lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99 100 100 100 100	D DIN 5040			A60		
F UTE	--	B NBN			BZ 1		

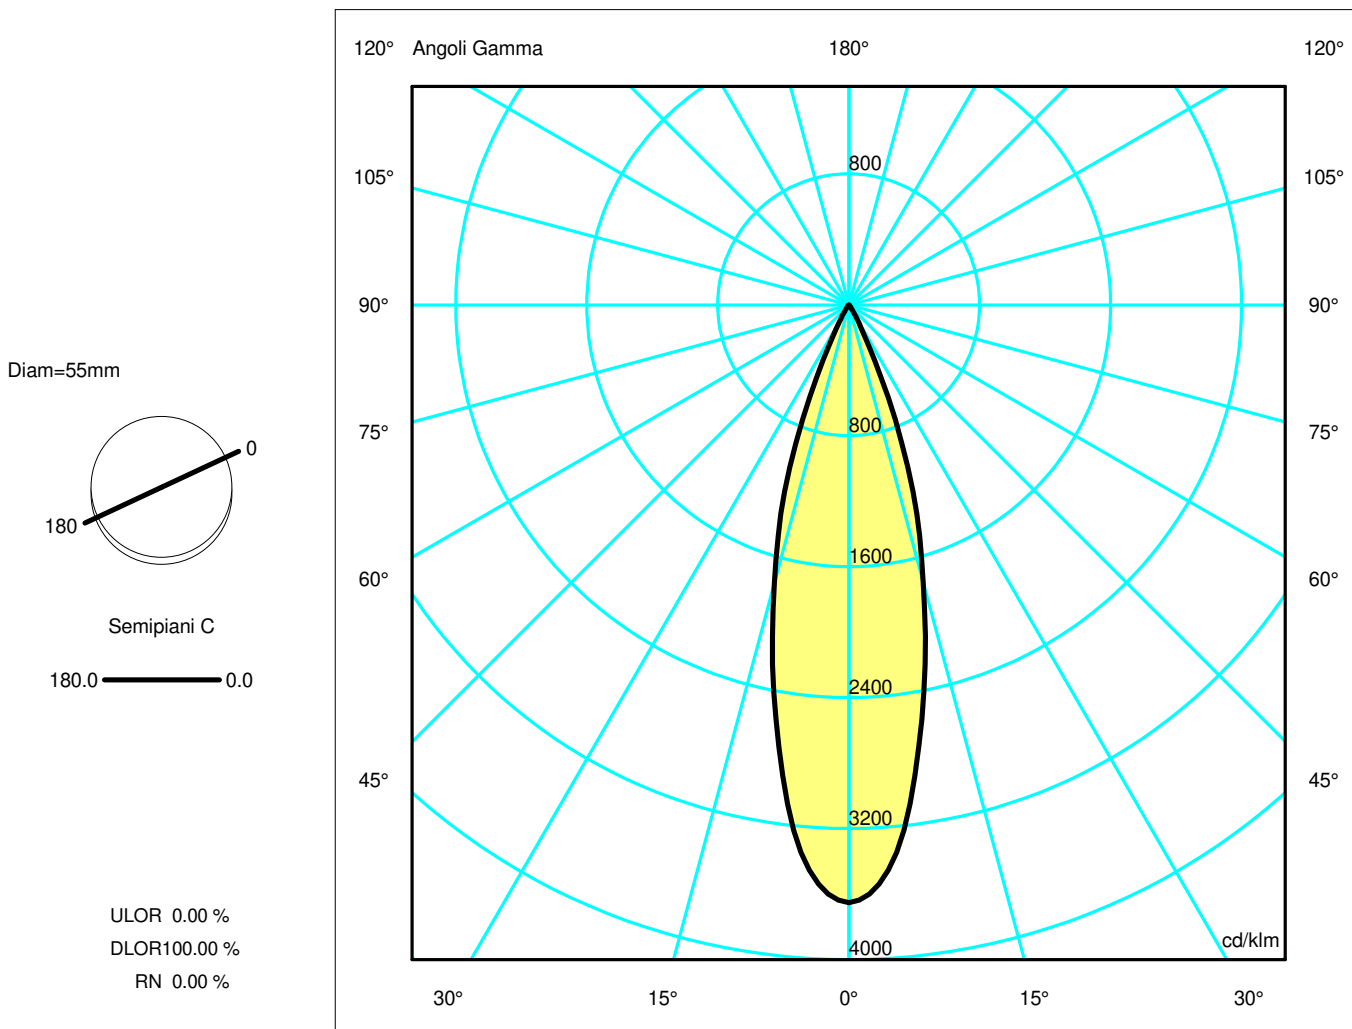

## Luminaire

Code AN10320+AP91400  
Name VECTOR 55 TRACK 930 WF ND BR.BRONZE + ANTI-DAZZLE LOUVRE

## Measurement


Code FTS2001147  
Name VECTOR 55 TRACK 930 WF ND BR.BRONZE + ANTI-DAZZLE LOUVRE

Luminaire Flux	1290.30 lm	Luminaire Power	25.00 W	Efficacy	51.61 lm/W	Efficiency	100.00%
Lamps Flux	1290.30 lm	Maximum value	3652.12 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	55 mm 47 mm	Height Height	130 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001735 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000420 m2	
Coordinate system Date Measurement Distance		CG 09-05-2018 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1290.30 lm	
LED Flux=2346lm LED Power=21W Eff=55% EfcLed=112lm/W EfcLum=52lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	99 --	100 --	100 --	100 --	D DIN 5040 B NBN	A60 BZ 1	

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.26	0.52	0.78	1.04	1.30	OC	0.26	0.52	0.78	1.04	1.30
OB	0.26	0.52	0.78	1.04	1.30	OD	0.26	0.52	0.78	1.04	1.30

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4712.34	4331.09	2269.58	479.33	37.36	6.63	2.12	0.62	0.43	0.29
OB	4712.34	4331.09	2269.58	479.33	37.36	6.63	2.12	0.62	0.43	0.29
OC	4712.34	4331.09	2269.58	479.33	37.36	6.63	2.12	0.62	0.43	0.29
OD	4712.34	4331.09	2269.58	479.33	37.36	6.63	2.12	0.62	0.43	0.29

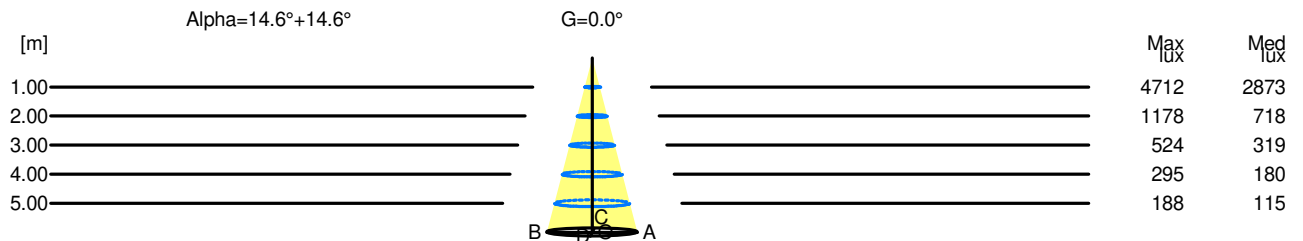

H[m]	D[m]	Max lux	Med lux	Alpha=14.6°+14.6°	G=0.0
1.00	0.52	4712	2873		
2.00	1.04	1178	718		
3.00	1.56	524	319		
4.00	2.08	295	180		
5.00	2.60	188	115		