


## Luminaire

Code AN01315+AP90300  
Name VECTOR 40 TRACK 927 WF ND BR.SILVER + SOFT FILTER

## Measurem.

Code FTS2001406  
Name VECTOR 40 TRACK 927 WF ND BR.SILVER + SOFT FILTER

Luminaire Flux	364.19 lm	Luminaire Power	10.00 W	Efficacy	36.42 lm/W	Efficiency	100.00%
Lamps Flux	364.19 lm	Maximum value	3008.02 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	40 mm	Height	103 mm		
Round Luminous Area		Diam.	27 mm	Height	0 mm		
Horizontal Luminous Area		0.000573 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.000139 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		14-05-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		364.19 lm	
LED Flux=785,9lm LED Power=8W Eff=46% EfcLed=98lm/W EfcLum=36lm/W CCT=2700K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	96 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

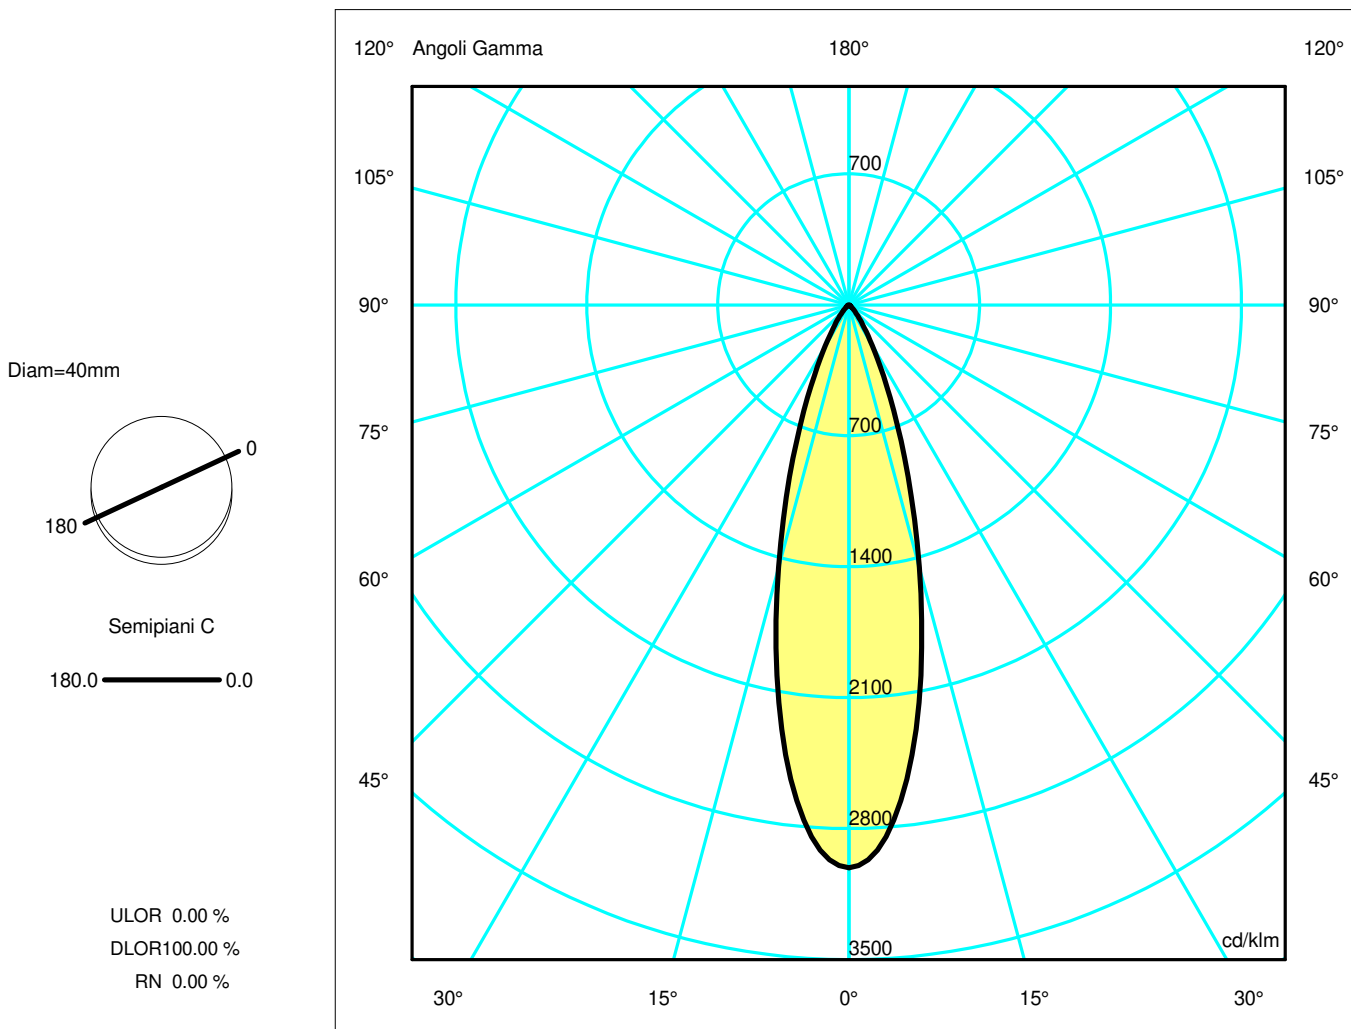

## Luminaire

Code AN01315+AP90300  
Name VECTOR 40 TRACK 927 WF ND BR.SILVER + SOFT FILTER

## Measurement

Code FTS2001406  
Name VECTOR 40 TRACK 927 WF ND BR.SILVER + SOFT FILTER

Luminaire Flux	364.19 lm	Luminaire Power	10.00 W	Efficacy	36.42 lm/W	Efficiency	100.00%
Lamps Flux	364.19 lm	Maximum value	3008.02 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	40 mm	Height	103 mm		
Round Luminous Area		Diam.	27 mm	Height	0 mm		
Horizontal Luminous Area		0.000573 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000139 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		14-05-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		364.19 lm	


LED Flux=785,9lm LED Power=8W Eff=46% EfcLed=98lm/W EfcLum=36lm/W CCT=2700K Ra=90 SDCM=2 L70(6K)=50000h

C.I.E.	96 99 100 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.26	0.52	0.78	1.04	1.31	OC	0.26	0.52	0.78	1.04	1.31
OB	0.26	0.52	0.78	1.04	1.31	OD	0.26	0.52	0.78	1.04	1.31

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1095.49	1006.72	529.56	174.77	47.47	12.71	3.77	1.61	0.70	0.08
OB	1095.49	1006.72	529.56	174.77	47.47	12.71	3.77	1.61	0.70	0.08
OC	1095.49	1006.72	529.56	174.77	47.47	12.71	3.77	1.61	0.70	0.08
OD	1095.49	1006.72	529.56	174.77	47.47	12.71	3.77	1.61	0.70	0.08

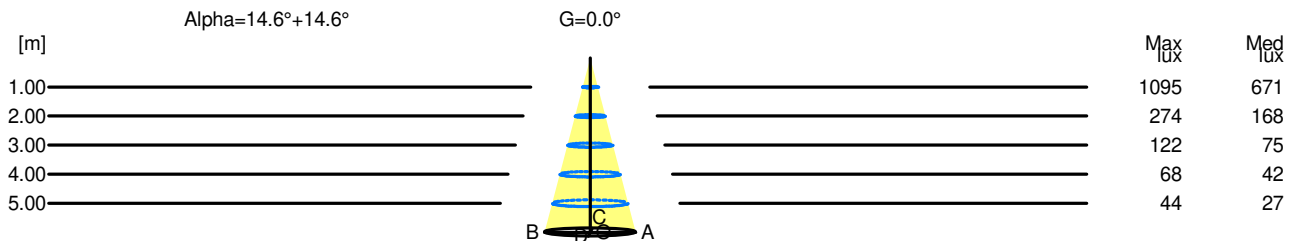

H[m]	D[m]	Max lux	Med lux	Alpha=14.6°+14.6°	G=0.0
1.00	0.52	1095	671		
2.00	1.04	274	168		
3.00	1.57	122	75		
4.00	2.09	68	42		
5.00	2.61	44	27		