


Luminaire

Code AN11815+AP91400
 Name VECTOR 55 TRACK 927 WF DALI BR.SILVER + ANTI-DAZZLE LOUVRE

Measurem.

Code FTS2001546
 Name VECTOR 55 TRACK 927 WF DALI BR.SILVER + ANTI-DAZZLE LOUVRE

Luminaire Flux	1239.70 lm	Luminaire Power	25.00 W	Efficacy	49.59 lm/W	Efficiency	100.00%
Lamps Flux	1239.70 lm	Maximum value	3652.12 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	55 mm 47 mm	Height Height	130 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001735 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000420 m2	
Coordinate system Date Measurement Distance		CG 09-05-2018 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1239.70 lm	
LED Flux=2254lm LED Power=21W Eff=55% EfcLed=107lm/W EfcLum=50lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	99 --	100 --	100 --	100 --	D DIN 5040 B NBN	A60 BZ 1	

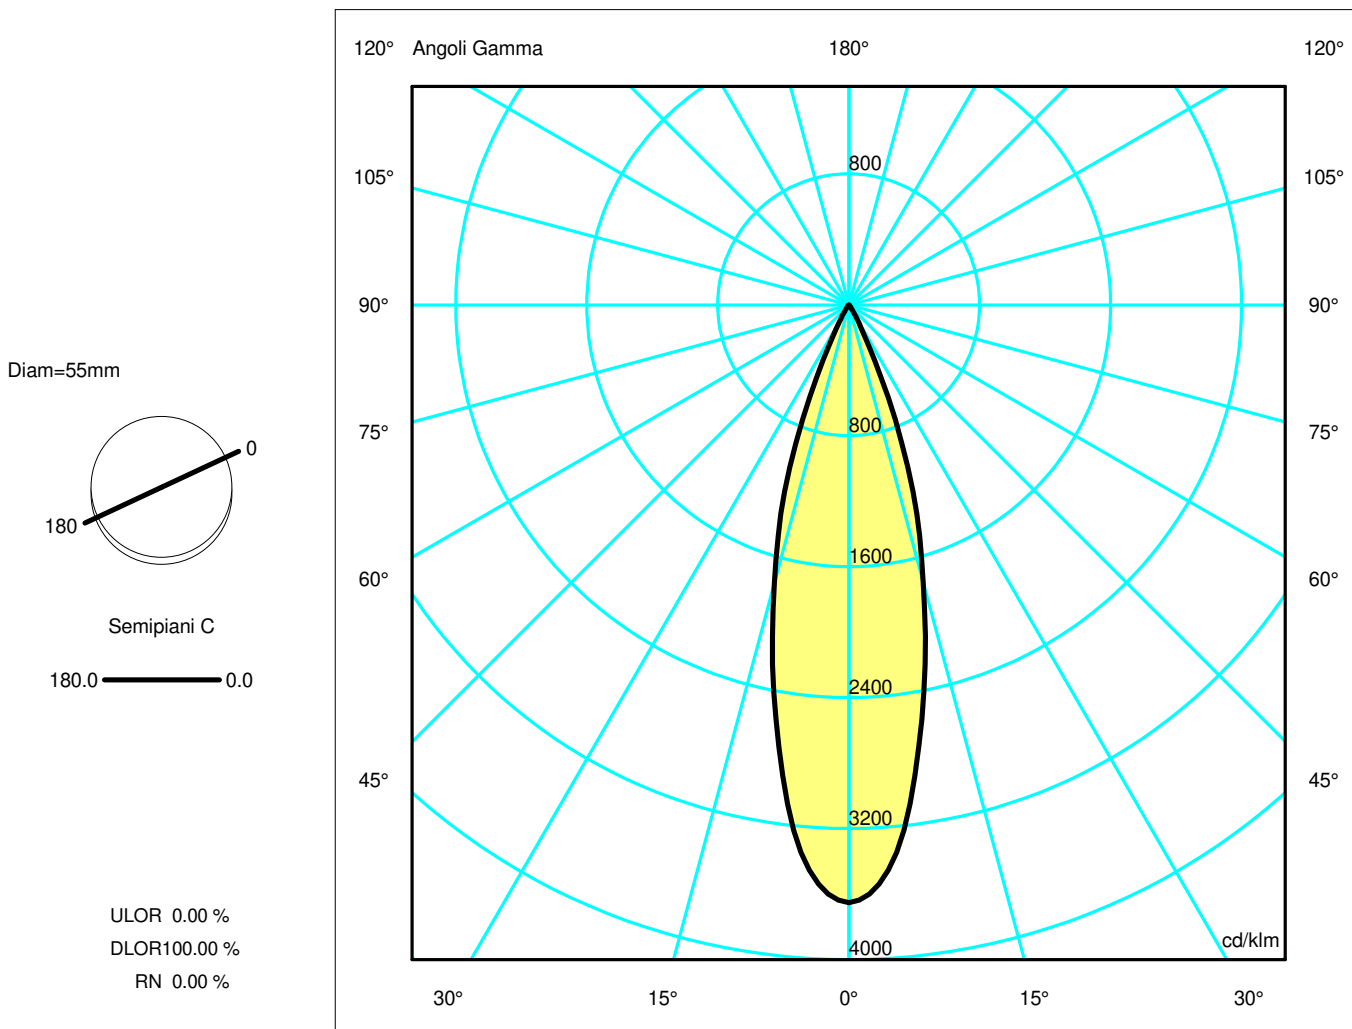

Luminaire

Code AN11815+AP91400
Name VECTOR 55 TRACK 927 WF DALI BR.SILVER + ANTI-DAZZLE LOUVRE

Measurement


Code FTS2001546
Name VECTOR 55 TRACK 927 WF DALI BR.SILVER + ANTI-DAZZLE LOUVRE

Luminaire Flux	1239.70 lm	Luminaire Power	25.00 W	Efficacy	49.59 lm/W	Efficiency	100.00%
Lamps Flux	1239.70 lm	Maximum value	3652.12 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	55 mm 47 mm	Height Height	130 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001735 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000420 m2	
Coordinate system Date Measurement Distance		CG 09-05-2018 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1239.70 lm	
LED Flux=2254lm LED Power=21W Eff=55% EfcLed=107lm/W EfcLum=50lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	99 --	100 --	100 --	100 --	D DIN 5040 B NBN	A60 BZ 1	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.26	0.52	0.78	1.04	1.30	OC	0.26	0.52	0.78	1.04	1.30
OB	0.26	0.52	0.78	1.04	1.30	OD	0.26	0.52	0.78	1.04	1.30

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4527.54	4161.24	2180.58	460.53	35.90	6.37	2.04	0.60	0.41	0.28
OB	4527.54	4161.24	2180.58	460.53	35.90	6.37	2.04	0.60	0.41	0.28
OC	4527.54	4161.24	2180.58	460.53	35.90	6.37	2.04	0.60	0.41	0.28
OD	4527.54	4161.24	2180.58	460.53	35.90	6.37	2.04	0.60	0.41	0.28

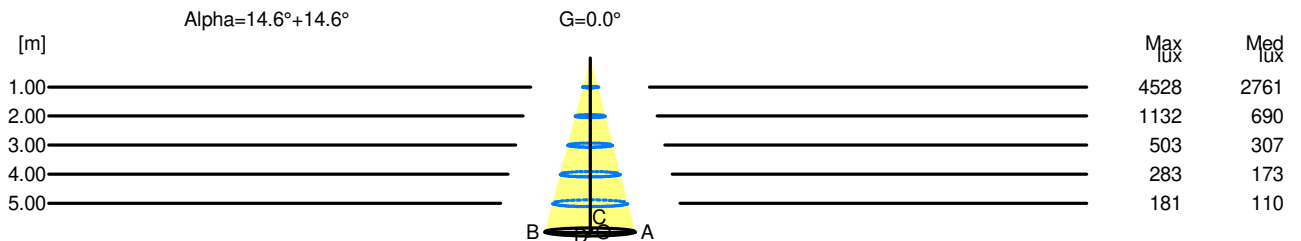

H[m]	D[m]	Max lux	Med lux	Alpha=14.6°+14.6°	G=0.0
1.00	0.52	4528	2761		
2.00	1.04	1132	690		
3.00	1.56	503	307		
4.00	2.08	283	173		
5.00	2.60	181	110		