


## Luminaire

Code AN35601+M056807  
 Name VECTOR 95 TRACK 940 SP DALI EUTRAC BCO + soft filter

## Measurem.

Code FTS2001614  
 Name VECTOR 95 TRACK 940 SP DALI EUTRAC BCO + soft filter

Luminaire Flux	2209.49 lm	Luminaire Power	30.00 W	Efficacy	73.65 lm/W	Efficiency	100.00%
Lamps Flux	2209.49 lm	Maximum value	3090.82 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 95 mm Diam. 75 mm	Height	210 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.004418 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.000000 m2 0.000000 m2 0.001069 m2		
Coordinate system	CG	Symmetry Type			Rotosymmetrical		
Date	01-04-2019	Maximum Gamma Angle			180		
Measurement Distance	0.00	Measurement Flux			2209.49 lm		
LED Flux=3485lm LED Power=27.5W Eff=63% EfcLed=127lm/W EfcLum=74lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	97 99 100 100 100	D DIN 5040			A60		
F UTE	--	B NBN			BZ 1		

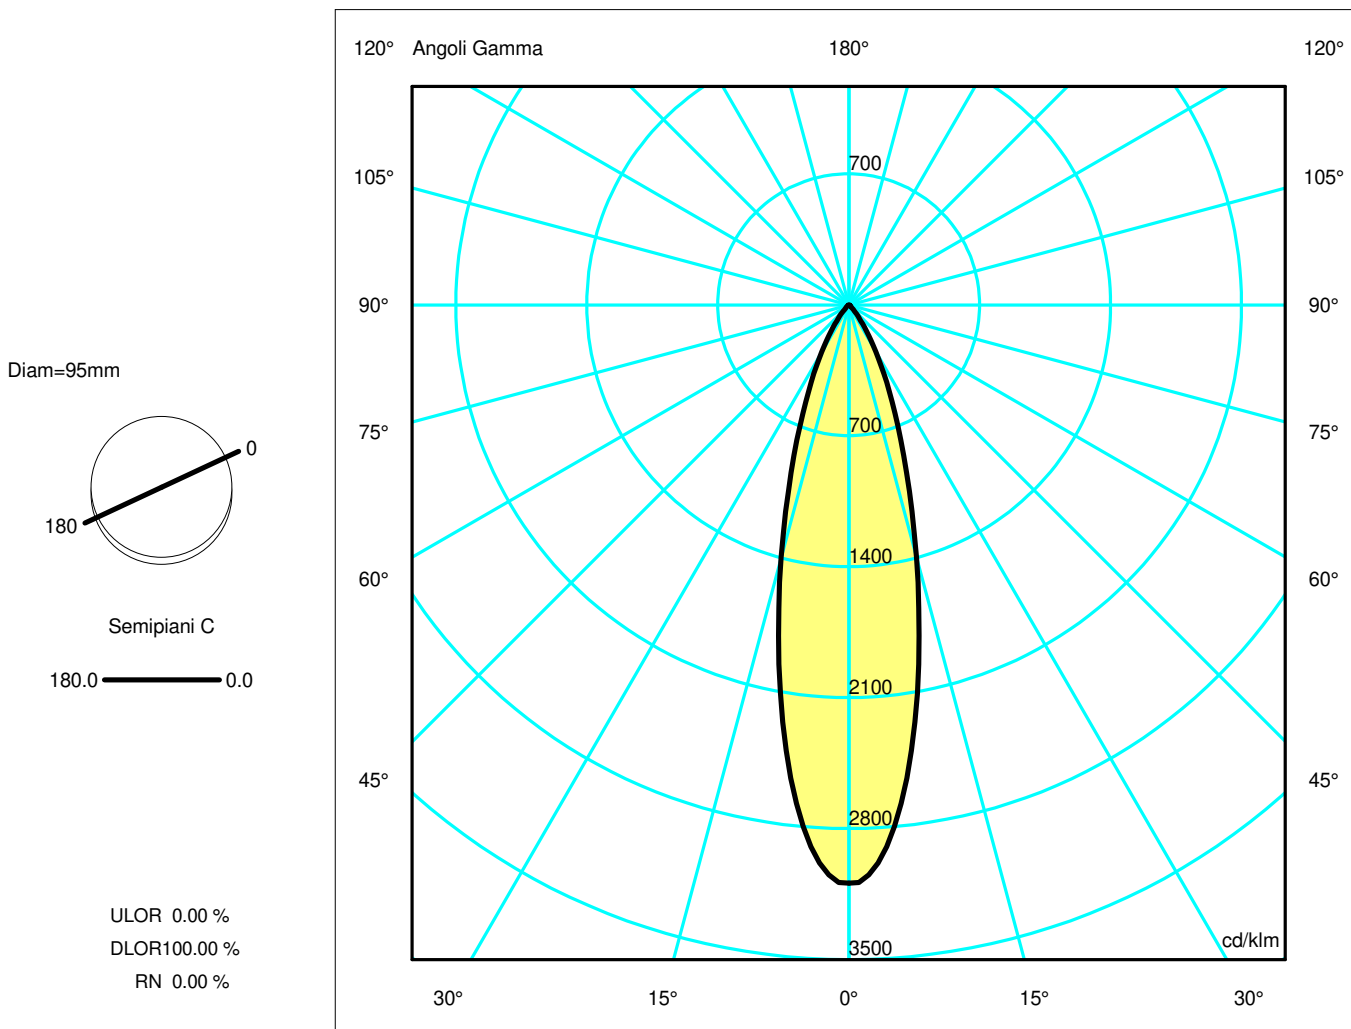

## Luminaire

Code AN35601+M056807  
Name VECTOR 95 TRACK 940 SP DALI EUTRAC BCO + soft filter

## Measur.


Code FTS2001614  
Name VECTOR 95 TRACK 940 SP DALI EUTRAC BCO + soft filter

Luminaire Flux	2209.49 lm	Luminaire Power	30.00 W	Efficacy	73.65 lm/W	Efficiency	100.00%
Lamps Flux	2209.49 lm	Maximum value	3090.82 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	95 mm 75 mm	Height Height	210 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004418 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.001069 m2	
Coordinate system Date Measurement Distance		CG 01-04-2019 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2209.49 lm	
LED Flux=3485lm LED Power=27.5W Eff=63% EfcLed=127lm/W EfcLum=74lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	97 99 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.49	0.74	0.99	1.24	OC	0.25	0.49	0.74	0.99	1.24
OB	0.25	0.49	0.74	0.99	1.24	OD	0.25	0.49	0.74	0.99	1.24

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6829.14	6184.97	3087.34	1127.75	324.60	59.18	17.46	8.26	3.24	0.51
OB	6829.14	6184.97	3087.34	1127.75	324.60	59.18	17.46	8.26	3.24	0.51
OC	6829.14	6184.97	3087.34	1127.75	324.60	59.18	17.46	8.26	3.24	0.51
OD	6829.14	6184.97	3087.34	1127.75	324.60	59.18	17.46	8.26	3.24	0.51

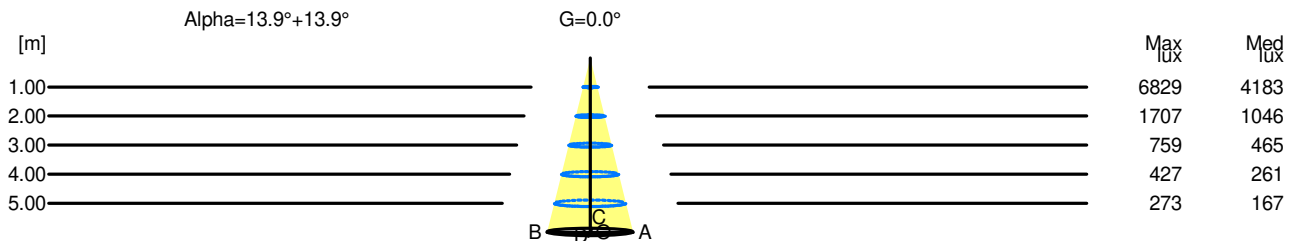

H[m]	D[m]	Max lux	Med lux	Alpha=13.9°+13.9°	G=0.0
1.00	0.49	6829	4183		
2.00	0.99	1707	1046		
3.00	1.48	759	465		
4.00	1.98	427	261		
5.00	2.47	273	167		