


Luminaire

Code AN31720+M282007
 Name VECTOR 95 TRACK 927 FL DALI EUTRAC BR.BRONZE+ lens for elliptical emission

Measur.

Code FTS2001658
 Name VECTOR 95 TRACK 927 FL DALI EUTRAC BR.BRONZE+ lens for elliptical emission

Luminaire Flux	1524.93 lm	Luminaire Power	30.00 W	Efficacy	50.83 lm/W	Efficiency	100.00%
Lamps Flux	1524.93 lm	Maximum value	2822.91 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire Round Luminous Area	Diam. 95 mm Diam. 75 mm	Height	210 mm	Height	0 mm		
Horizontal Luminous Area	0.004418 m ²	Emitting area on Plane 180°	0.000000 m ²	Emitting area on Plane 270°	0.000000 m ²		
Emitting area on Plane 0°	0.000000 m ²	Glare area at 76°	0.001069 m ²				
Emitting area on Plane 90°	0.000000 m ²						
Coordinate system	CG	Symmetry Type	Double Symmetrical				
Date	03-04-2019	Maximum Gamma Angle	180				
Measurement Distance	0.00	Measurement Flux	1524.93 lm				
LED Flux=3300lm LED Power=27.5W Eff=46% EfcLed=120lm/W EfcLum=51lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	95 99 100 100 100	D DIN 5040	A60				
F UTE	1.00 A	B NBN	BZ 1				

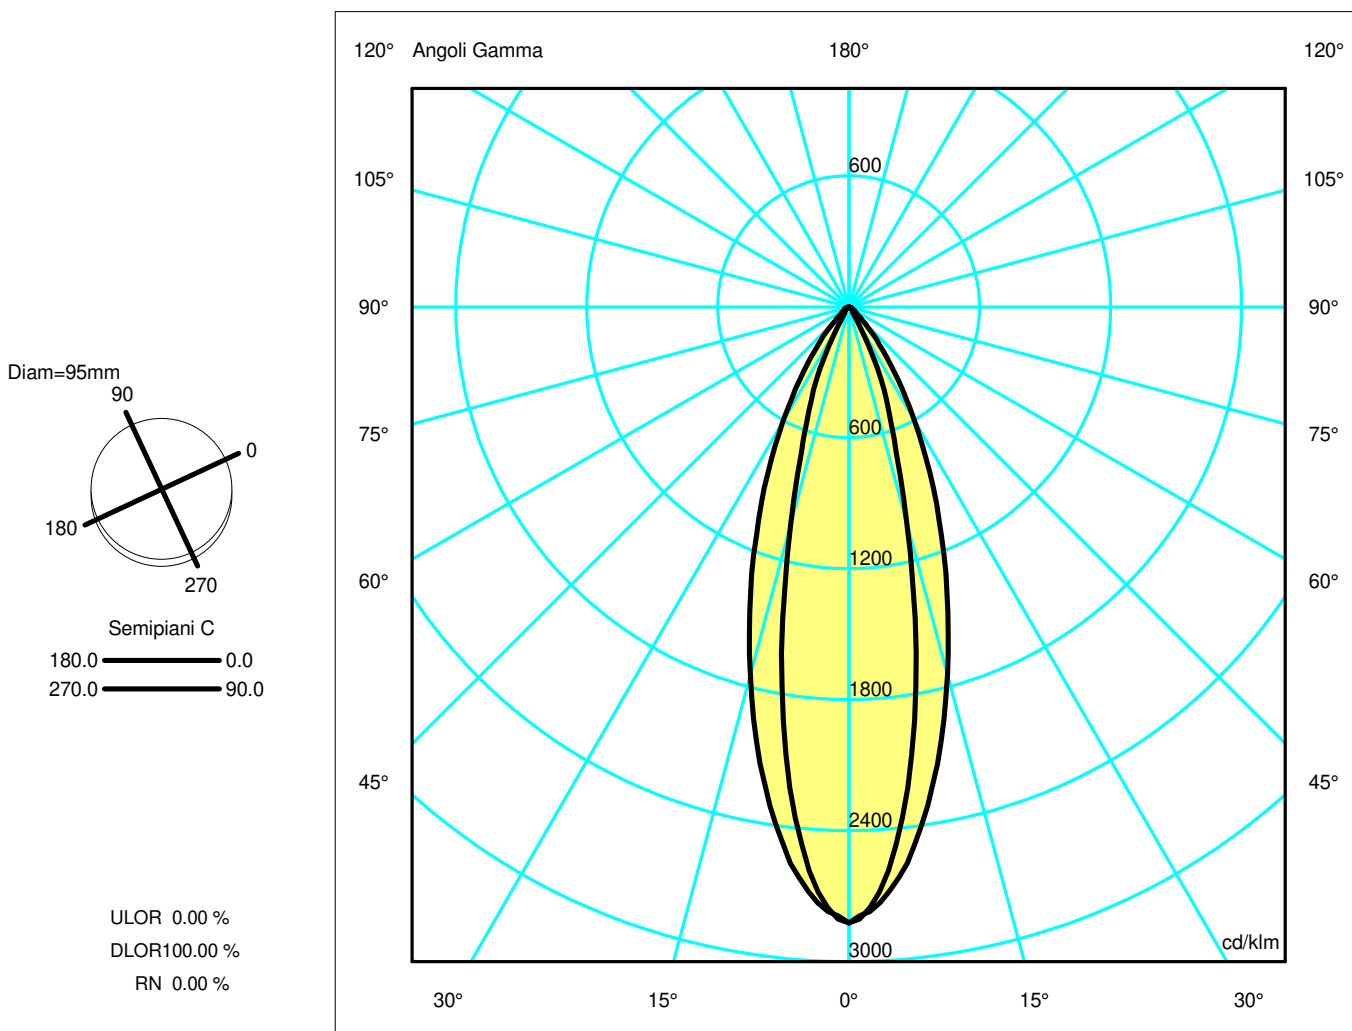

Luminaire

Code AN31720+M282007
 Name VECTOR 95 TRACK 927 FL DALI EUTRAC BR.BRONZE+ lens for elliptical emission

Measurem.

Code FTS2001658
 Name VECTOR 95 TRACK 927 FL DALI EUTRAC BR.BRONZE+ lens for elliptical emission

Luminaire Flux	1524.93 lm	Luminaire Power	30.00 W	Efficacy	50.83 lm/W	Efficiency	100.00%
Lamps Flux	1524.93 lm	Maximum value	2822.91 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	95 mm	Height	210 mm		
Round Luminous Area		Diam.	75 mm	Height	0 mm		
Horizontal Luminous Area	0.004418 m ²			Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°	0.000000 m ²			Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°	0.000000 m ²			Glare area at 76°		0.001069 m ²	
Coordinate system	CG			Symmetry Type		Double Symmetrical	
Date	03-04-2019			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		1524.93 lm	


LED Flux=3300lm LED Power=27.5W Eff=46% EfcLed=120lm/W EfcLum=51lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h

C.I.E.	95 99 100 100 100		D DIN 5040	A60
F UTE	1.00 A		B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.22	0.44	0.65	0.87	1.09	OC	0.34	0.68	1.01	1.35	1.69
OB	0.22	0.44	0.65	0.87	1.09	OD	0.34	0.68	1.01	1.35	1.69

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4304.75	3771.83	1570.01	472.24	51.74	38.00	18.42	7.55	4.18	0.47
OB	4304.75	3771.83	1570.01	472.24	51.74	38.00	18.42	7.55	4.18	0.47
OC	4304.75	4001.93	2662.16	1398.03	551.72	136.08	49.09	25.51	13.06	0.55
OD	4304.75	4001.93	2662.16	1398.03	551.72	136.08	49.09	25.51	13.06	0.55

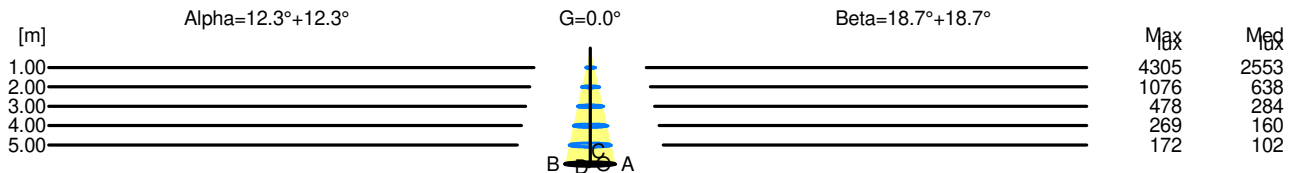

H[m]	D[m]	Max lux	Med lux	Alpha=12.3°+12.3°	G=0.0
1.00	0.44	4305	2553		
2.00	0.87	1076	638		
3.00	1.31	478	284		
4.00	1.74	269	160		
5.00	2.18	172	102		

H[m]	D[m]	Max lux	Med lux	Beta=18.7°+18.7°	G=0.0
1.00	0.68	4305	2553		
2.00	1.35	1076	638		
3.00	2.03	478	284		
4.00	2.70	269	160		
5.00	3.38	172	102		