


## Luminaire

Code AN21115+M282100  
Name VECTOR 95 TRACK 927 SP ND BR.SILVER + anti-dazzle louvre

## Measur.

Code FTS1901288  
Name VECTOR 95 TRACK 927 SP ND BR.SILVER + anti-dazzle louvre

Luminaire Flux	1881.33 lm	Luminaire Power	30.00 W	Efficacy	62.71 lm/W	Efficiency	100.00%
Lamps Flux	1881.33 lm	Maximum value	8525.03 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire Round Luminous Area	Diam. 95 mm Diam. 74 mm	Height	210 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.004301 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.001040 m2				
Coordinate system	CG	Symmetry Type	Double Symmetrical				
Date	29-03-2019	Maximum Gamma Angle	180				
Measurement Distance	0.00	Measurement Flux	1881.33 lm				
LED Flux=3300lm LED Power=27.5W Eff=57% EfcLed=120lm/W EfcLum=63lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99 100 100 100 100	D DIN 5040	A60				
F UTE	--	B NBN	BZ 1				

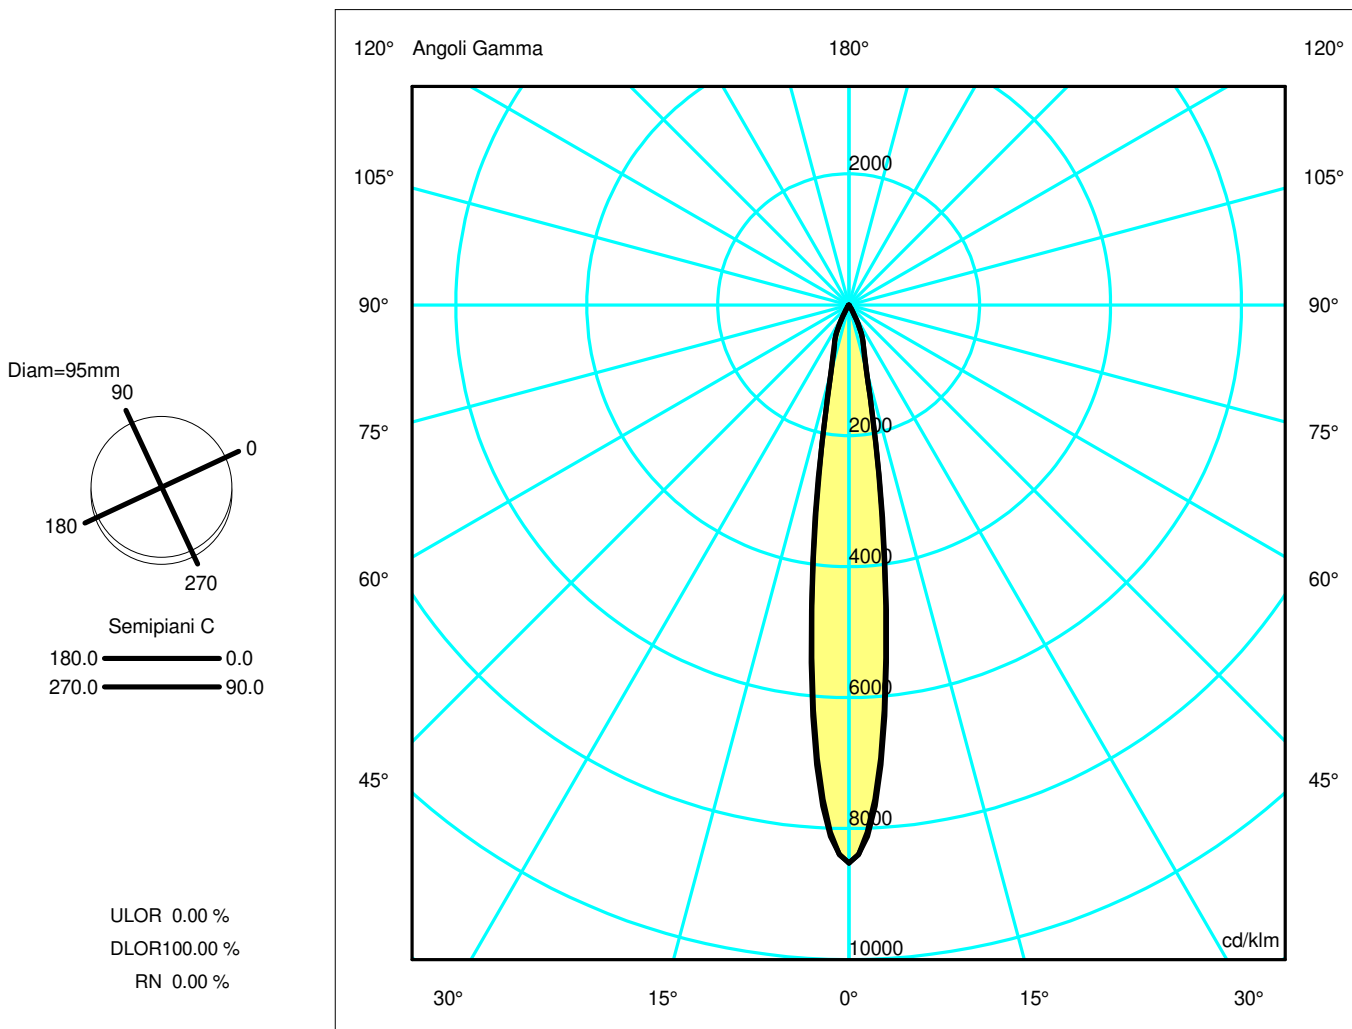

## Luminaire

Code AN21115+M282100  
Name VECTOR 95 TRACK 927 SP ND BR.SILVER + anti-dazzle louver

## Measurement

Code FTS1901288  
Name VECTOR 95 TRACK 927 SP ND BR.SILVER + anti-dazzle louver

Luminaire Flux	1881.33 lm	Luminaire Power	30.00 W	Efficacy	62.71 lm/W	Efficiency	100.00%
Lamps Flux	1881.33 lm	Maximum value	8525.03 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire Round Luminous Area		Diam.	95 mm	Height	210 mm		
		Diam.	74 mm	Height	0 mm		
Horizontal Luminous Area	0.004301 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.001040 m2		
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle	180		Double Symmetrical
Date	29-03-2019	Measurement Flux			1881.33 lm		
Measurement Distance	0.00						

LED Flux=3300lm LED Power=27.5W Eff=57% EfcLed=120lm/W EfcLum=63lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h


C.I.E. 99 100 100 100 100  
F UTE --

D DIN 5040  
B NBN  
A60  
BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.13	0.26	0.39	0.53	0.66	OC	0.13	0.27	0.40	0.53	0.67
OB	0.13	0.26	0.39	0.53	0.66	OD	0.13	0.27	0.40	0.53	0.67

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	16038.40	11680.13	1971.83	736.55	28.38	8.12	3.18	1.50	1.00	0.45
OB	16038.40	11680.13	1971.83	736.55	28.38	8.12	3.18	1.50	1.00	0.45
OC	16038.40	11854.98	1935.02	735.16	29.61	10.23	4.77	2.30	1.27	0.51
OD	16038.40	11854.98	1935.02	735.16	29.61	10.23	4.77	2.30	1.27	0.51

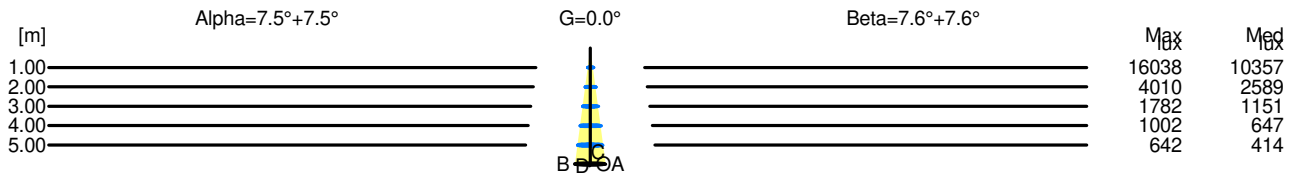

H[m]	D[m]	Max lux	Med lux	Alpha=7.5°+7.5°	G=0.0
1.00	0.26	16038	10357		
2.00	0.53	4010	2589		
3.00	0.79	1782	1151		
4.00	1.05	1002	647		
5.00	1.32	642	414		

H[m]	D[m]	Max lux	Med lux	Beta=7.6°+7.6°	G=0.0
1.00	0.27	16038	10357		
2.00	0.53	4010	2589		
3.00	0.80	1782	1151		
4.00	1.06	1002	647		
5.00	1.33	642	414		