


## Luminaire

Code AN25218+M282007  
 Name VECTOR 95 TRACK 940 FL ND BR.COPPER + lens for elliptical emission

## Measurem.

Code FTS1901265  
 Name VECTOR 95 TRACK 940 FL ND BR.COPPER + lens for elliptical emission

Luminaire Flux	1610.42 lm	Luminaire Power	30.00 W	Efficacy	53.68 lm/W	Efficiency	100.00%
Lamps Flux	1610.42 lm	Maximum value	2822.91 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire Round Luminous Area		Diam.	95 mm	Height	210 mm		
		Diam.	75 mm	Height	0 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.001069 m2		
Coordinate system	CG			Symmetry Type	Double Symmetrical		
Date	03-04-2019			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	1610.42 lm		
LED Flux=3485lm LED Power=27.5W Eff=46% EfcLed=127lm/W EfcLum=54lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	95 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

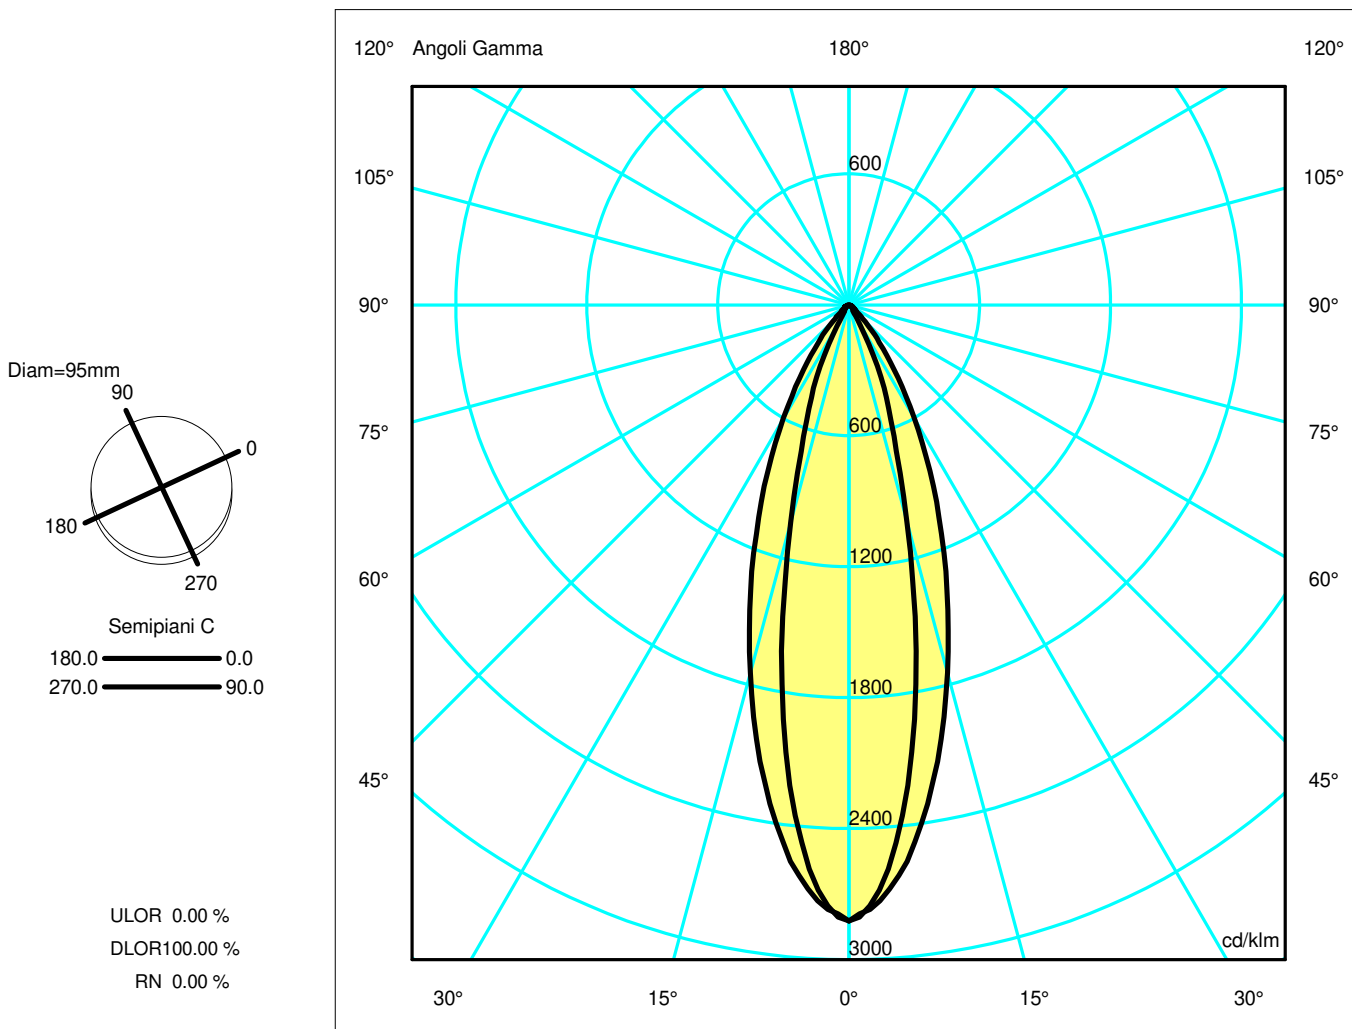

## Luminaire

Code AN25218+M282007  
Name VECTOR 95 TRACK 940 FL ND BR.COPPER + lens for elliptical emission

## Measurement

Code FTS1901265  
Name VECTOR 95 TRACK 940 FL ND BR.COPPER + lens for elliptical emission

Luminaire Flux	1610.42 lm	Luminaire Power	30.00 W	Efficacy	53.68 lm/W	Efficiency	100.00%
Lamps Flux	1610.42 lm	Maximum value	2822.91 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	95 mm	Height	210 mm		
Round Luminous Area		Diam.	75 mm	Height	0 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.001069 m2		
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle	180	Double Symmetrical	
Date	03-04-2019	Measurement Flux			1610.42 lm		
Measurement Distance	0.00						


LED Flux=3485lm LED Power=27.5W Eff=46% EfcLed=127lm/W EfcLum=54lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=50000h

C.I.E.	95 99 100 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.22	0.44	0.65	0.87	1.09	OC	0.34	0.68	1.01	1.35	1.69
OB	0.22	0.44	0.65	0.87	1.09	OD	0.34	0.68	1.01	1.35	1.69

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4546.08	3983.29	1658.03	498.72	54.64	40.13	19.46	7.98	4.41	0.50
OB	4546.08	3983.29	1658.03	498.72	54.64	40.13	19.46	7.98	4.41	0.50
OC	4546.08	4226.29	2811.41	1476.40	582.65	143.71	51.84	26.94	13.79	0.58
OD	4546.08	4226.29	2811.41	1476.40	582.65	143.71	51.84	26.94	13.79	0.58

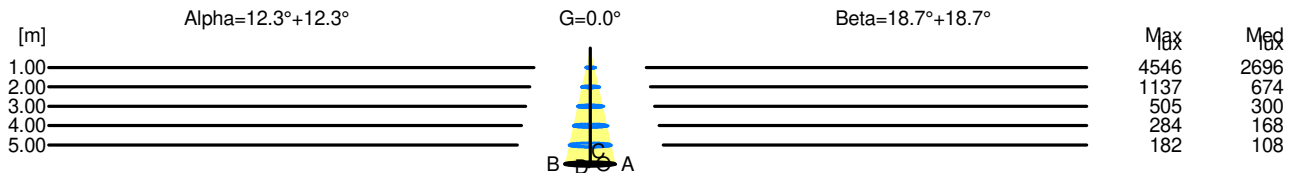

H[m]	D[m]	Max lux	Med lux	Alpha=12.3°+12.3°	G=0.0
1.00	0.44	4546	2696		
2.00	0.87	1137	674		
3.00	1.31	505	300		
4.00	1.74	284	168		
5.00	2.18	182	108		

H[m]	D[m]	Max lux	Med lux	Beta=18.7°+18.7°	G=0.0
1.00	0.68	4546	2696		
2.00	1.35	1137	674		
3.00	2.03	505	300		
4.00	2.70	284	168		
5.00	3.38	182	108		