


## Luminaire

Code AN31704  
Name VECTOR 95 TRACK 927 FL DALI EUTRAC NRO

## Measurem.

Code FTS1901143  
Name VECTOR 95 TRACK 927 FL DALI EUTRAC NRO

Luminaire Flux	2602.38 lm	Luminaire Power	30.00 W	Efficacy	86.75 lm/W	Efficiency	100.00%
Lamps Flux	2602.38 lm	Maximum value	4344.45 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	95 mm 75 mm	Height Height	210 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004418 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.001069 m2	
Coordinate system Date Measurement Distance		CG 02-04-2019 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2602.38 lm	
LED Flux=3300lm LED Power=27.5W Eff=79% EfcLed=120lm/W EfcLum=87lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	100 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

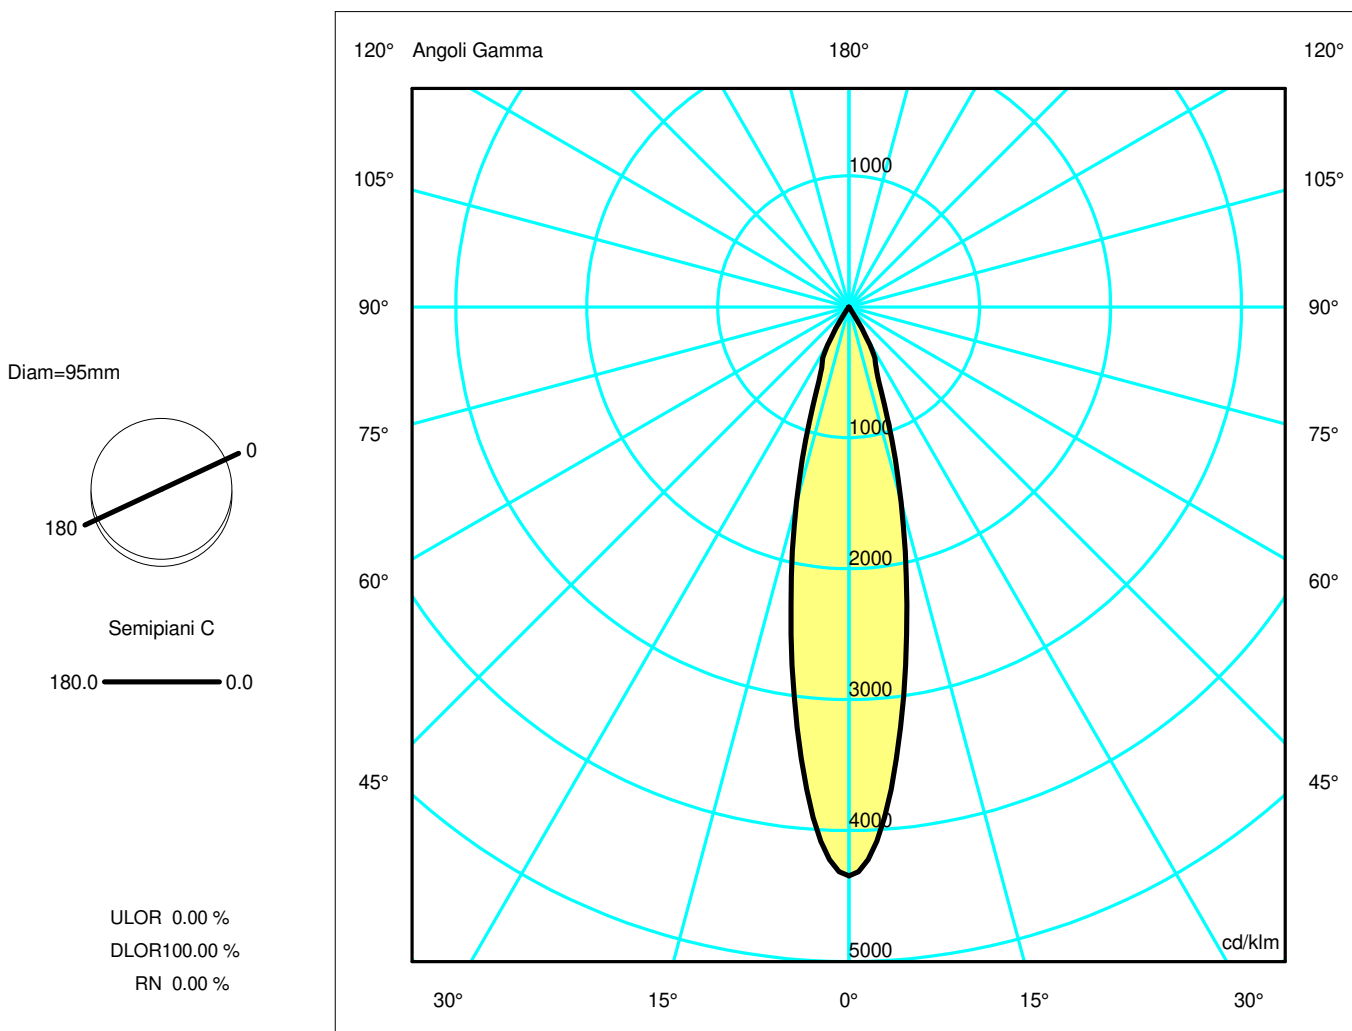

## Luminaire

Code AN31704  
Name VECTOR 95 TRACK 927 FL DALI EUTRAC NRO

## Measurement


Code FTS1901143  
Name VECTOR 95 TRACK 927 FL DALI EUTRAC NRO

Luminaire Flux	2602.38 lm	Luminaire Power	30.00 W	Efficacy	86.75 lm/W	Efficiency	100.00%
Lamps Flux	2602.38 lm	Maximum value	4344.45 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam.	95 mm	Height	210 mm		
		Diam.	75 mm	Height	0 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.001069 m2		
Coordinate system	CG	Symmetry Type			Rotosymmetrical		
Date	02-04-2019	Maximum Gamma Angle			180		
Measurement Distance	0.00	Measurement Flux			2602.38 lm		
LED Flux=3300lm LED Power=27.5W Eff=79% EfcLed=120lm/W EfcLum=87lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	100 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.41	0.62	0.83	1.04	OC	0.21	0.41	0.62	0.83	1.04
OB	0.21	0.41	0.62	0.83	1.04	OD	0.21	0.41	0.62	0.83	1.04

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	11305.91	9625.76	4020.90	1252.06	32.55	5.60	2.40	1.44	0.91	0.47
OB	11305.91	9625.76	4020.90	1252.06	32.55	5.60	2.40	1.44	0.91	0.47
OC	11305.91	9625.76	4020.90	1252.06	32.55	5.60	2.40	1.44	0.91	0.47
OD	11305.91	9625.76	4020.90	1252.06	32.55	5.60	2.40	1.44	0.91	0.47

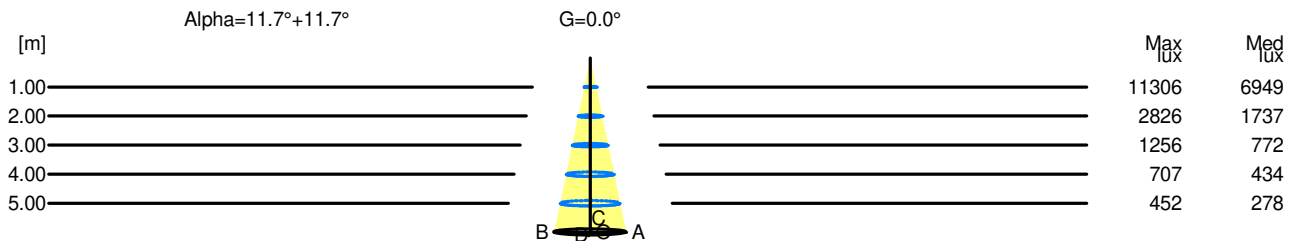

H[m]	D[m]	Max lux	Med lux	Alpha=11.7°+11.7°	G=0.0
1.00	0.41	11306	6949		
2.00	0.83	2826	1737		
3.00	1.24	1256	772		
4.00	1.66	707	434		
5.00	2.07	452	278		