


## Luminaire

Code 1805140A  
Name LAGUNA 26 LED TAVOLO ORO


## Measurum.

Code FTS1701767-A  
Name LAGUNA 26 LED TAVOLO ORO

Luminaire Flux	1566 lm	Luminaire Power	17.0 W	Efficacy	92.108 lm/W	Efficiency	79.08%
Source Flux	1980 lm	Maximum value	189.70 cd/klm	Position	C=195.00 G=175.00	CG	Asymmetrical
Round Luminaire		Diam.	260 mm	Height	380 mm		
Round Luminous Area		Diam.	260 mm	Height	0 mm		
Horizontal Luminous Area			0.053093 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.012844 m2
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		17-01-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1980 lm	
Lamping=LED 1x17W (E27) CCT=3000K CRI=80							
C.I.E.	16 44 72 34 79			D DIN 5040	D12		
F UTE	0.27 J + 0.53 T			B NBN	BZ 10 / 1.25 / BZ 9		

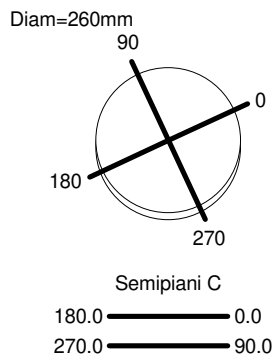

ULOR 52.53 %  
DLOR 26.55 %  
RN 66.43 %

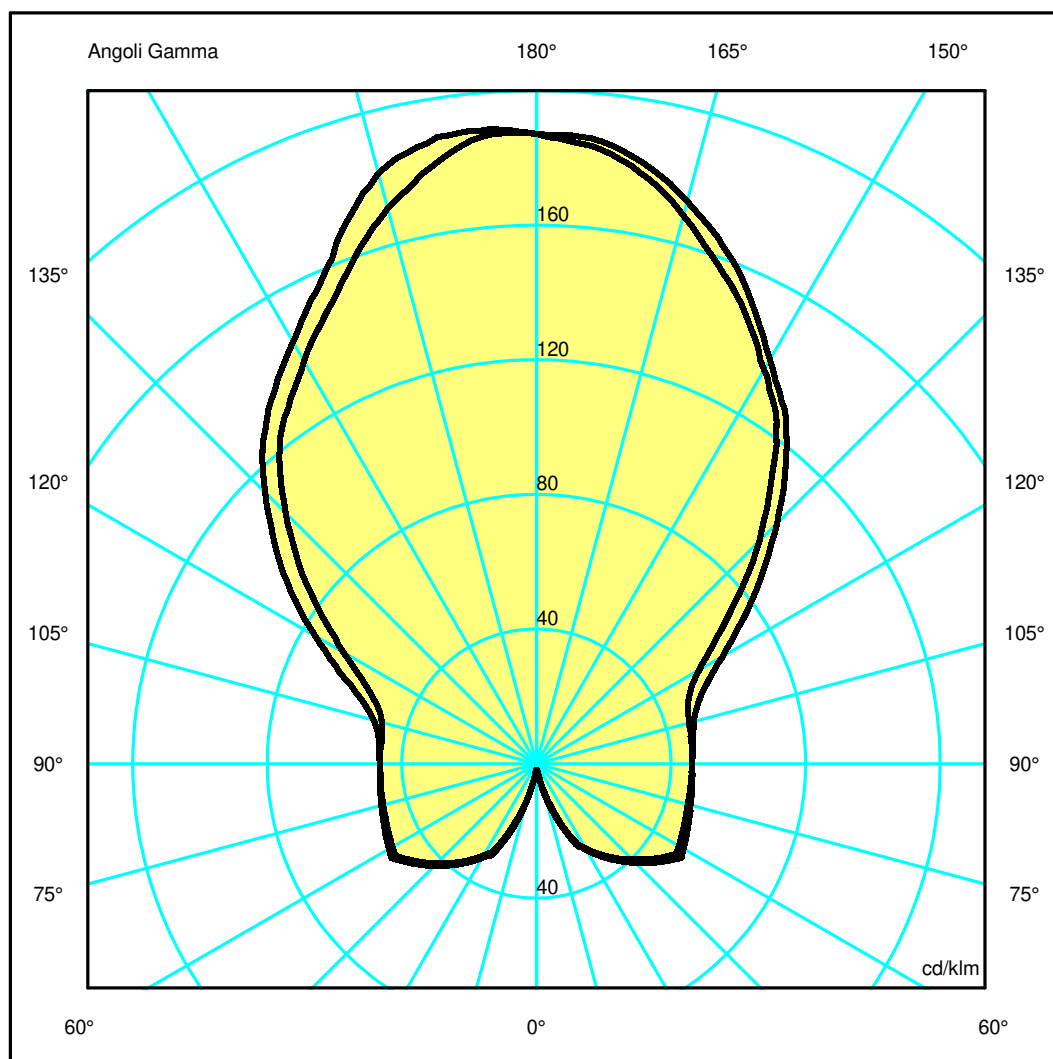

## Luminaire

Code 1805140A  
Name LAGUNA 26 LED TAVOLO ORO

## Measur.


Code FTS1701767-A  
Name LAGUNA 26 LED TAVOLO ORO

Luminaire Flux	1566 lm	Luminaire Power	17.0 W	Efficacy	92.108 lm/W	Efficiency	79.08%
Source Flux	1980 lm	Maximum value	189.70 cd/klm	Position	C=195.00 G=175.00	CG	Asymmetrical
Round Luminaire		Diam.	260 mm	Height	380 mm		
Round Luminous Area		Diam.	260 mm	Height	0 mm		
Horizontal Luminous Area			0.053093 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.012844 m2
Coordinate system		CG		Symmetry Type			Asymmetrical
Date		17-01-2022		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			1980 lm
Lamping=LED 1x17W (E27) CCT=3000K CRI=80							
C.I.E.	16 44 72 34 79			D DIN 5040	D12		
F UTE	0.27 J + 0.53 T			B NBN	BZ 10 / 1.25 / BZ 9		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.06	2.12	3.17	4.23	5.29	OC	1.10	2.21	3.31	4.41	5.52
OB	1.25	2.51	3.76	5.01	6.27	OD	1.17	2.34	3.51	4.67	5.84

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	370.70	365.03	333.71	291.32	246.19	185.55	129.12	99.77	92.84	91.69
OB	370.70	373.90	359.81	306.80	268.45	225.96	176.54	128.26	99.34	92.96
OC	370.70	369.37	342.66	299.53	254.41	200.22	148.52	110.27	95.99	92.37
OD	370.70	370.42	338.22	292.70	254.89	208.99	155.71	111.87	94.21	92.37

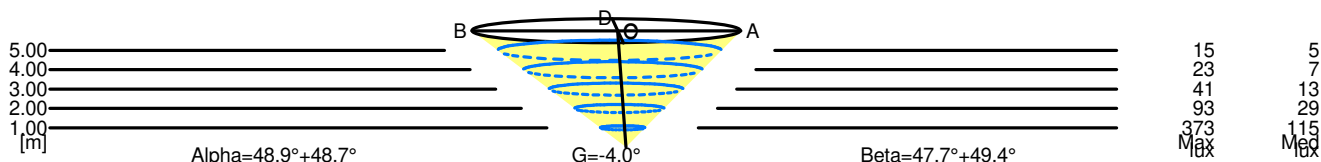

5.00	11.56	15	5		
4.00	9.25	23	7		
3.00	6.93	41	13		
2.00	4.62	93	29		
1.00	2.31	373	115		
H[m]	D[m]	Max lux	Med lux	Alpha=48.9°+48.7°	G=-4.0

5.00	11.36	15	5		
4.00	9.09	23	7		
3.00	6.82	41	13		
2.00	4.54	93	29		
1.00	2.27	373	115		
H[m]	D[m]	Max lux	Med lux	Beta=49.4°+47.7°	G=0.0