

Luminaire

Code AP10320
Name VECTOR 55 MAGNET 930 WF DALI BR.BRONZE

Measurem.

Code FTS1800188-B
Name VECTOR 55 MAGNET 930 WF DALI BR.BRONZE


Luminaire Flux	1878 lm	Luminaire Power	19.0 W	Efficacy	98.842 lm/W	Efficiency	100.00%
Source Flux	1878 lm	Maximum value	3385.66 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	48 mm	Height	0 mm		
Horizontal Luminous Area		0.001810 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000438 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-02-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1878 lm	

LED Flux=2491lm LED Power=17W Eff=75% EfcLed=143lm/W EfcLum=99lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h

C.I.E. 100 100 100 100 100
F UTE --

D DIN 5040
B NBN
A60
BZ 1


Diam=55mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

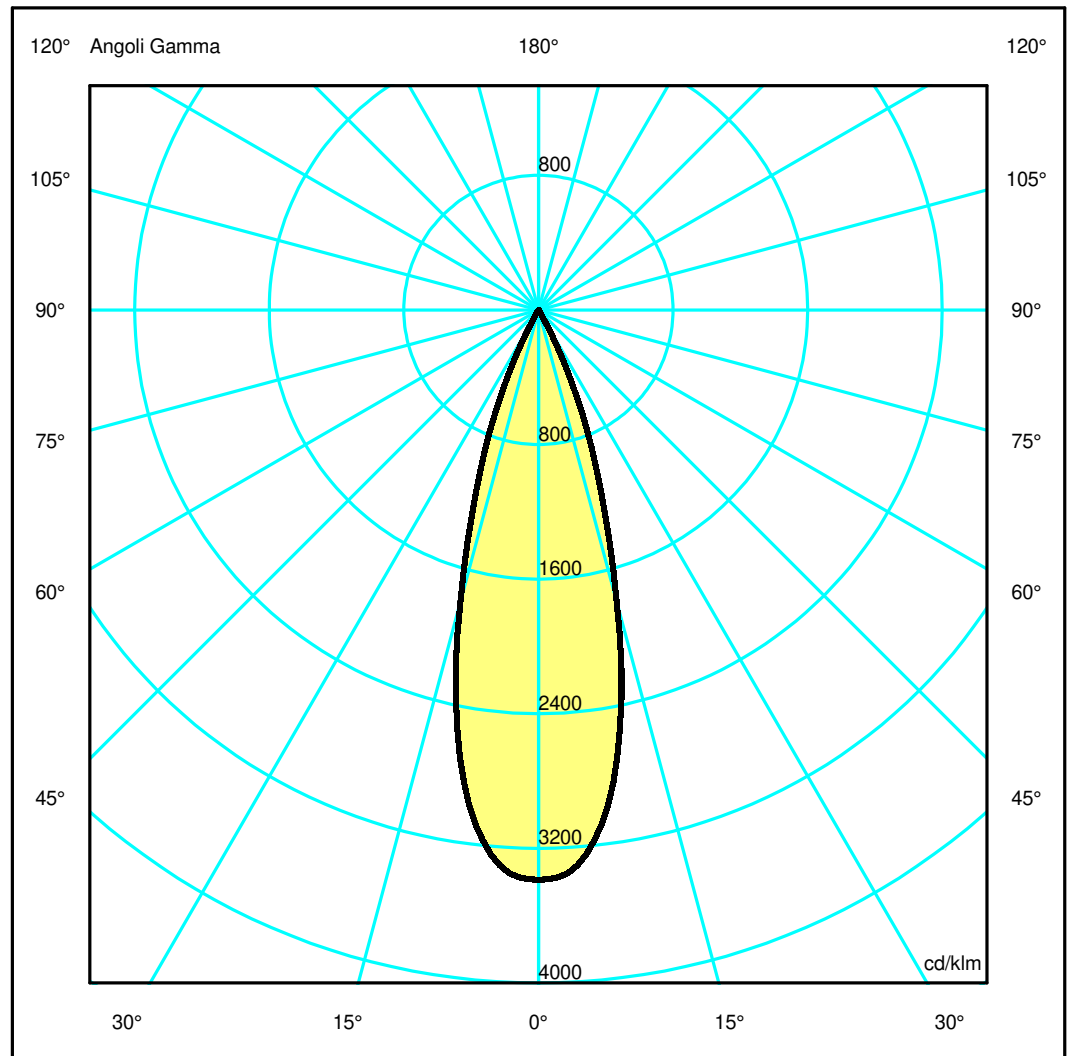

Luminaire

Code AP10320
Name VECTOR 55 MAGNET 930 WF DALI BR.BRONZE

Measurerm.


Code FTS1800188-B
Name VECTOR 55 MAGNET 930 WF DALI BR.BRONZE

Luminaire Flux	1878 lm	Luminaire Power	19.0 W	Efficacy	98.842 lm/W	Efficiency	100.00%
Source Flux	1878 lm	Maximum value	3385.66 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	48 mm	Height	0 mm		
Horizontal Luminous Area		0.001810 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000438 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-02-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1878 lm	
LED Flux=2491lm LED Power=17W Eff=75% EfcLed=143lm/W EfcLum=99lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	100	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.28	0.56	0.84	1.11	1.39	OC	0.28	0.56	0.84	1.11	1.39
OB	0.28	0.56	0.84	1.11	1.39	OD	0.28	0.56	0.84	1.11	1.39

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6358.27	6098.93	3369.72	809.68	20.89	6.24	2.76	1.69	1.02	0.42
OB	6358.27	6098.93	3369.72	809.68	20.89	6.24	2.76	1.69	1.02	0.42
OC	6358.27	6098.93	3369.72	809.68	20.89	6.24	2.76	1.69	1.02	0.42
OD	6358.27	6098.93	3369.72	809.68	20.89	6.24	2.76	1.69	1.02	0.42

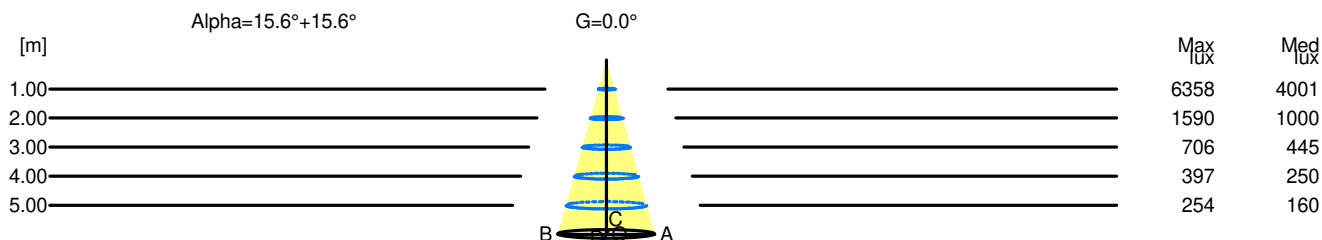

H[m]	D[m]	Max lux	Med lux	Alpha=15.6°+15.6°	G=0.0
1.00	0.56	6358	4001		
2.00	1.11	1590	1000		
3.00	1.67	706	445		
4.00	2.23	397	250		
5.00	2.78	254	160		