

## Luminaire

Code AT00700+AT10200  
 Name A.39 MODULO TLESS DIFF L=1482mm 840 ND

## Measurement

Code FTS1800981  
 Name A.39 MODULO TLESS DIFF L=1482mm 840 ND


Luminaire Flux	2587.33 lm	Luminaire Power	41.00 W	Efficacy	63.11 lm/W	Efficiency	100.00%
Sources Flux	2587.33 lm	Maximum value	395.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1482 mm	Width	92 mm	Height	35 mm
Rectangular Luminous Area		Length	1474 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area			0.058960 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.014264 m2
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		22-05-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2587.33 lm	

LED Flux=6048lm LED Power=37W Eff=43% EfcLed=163lm/W EfcLum=63lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h

C.I.E. 50 80 96 100 100  
 F UTE 1.00 E

D DIN 5040 A30  
 B NBN BZ 4


1482mm x 92mm



Semipiani C

180.0 — 0.0  
 270.0 — 90.0

ULOR 0.02 %  
 DLOR 99.98 %  
 RN 0.02 %

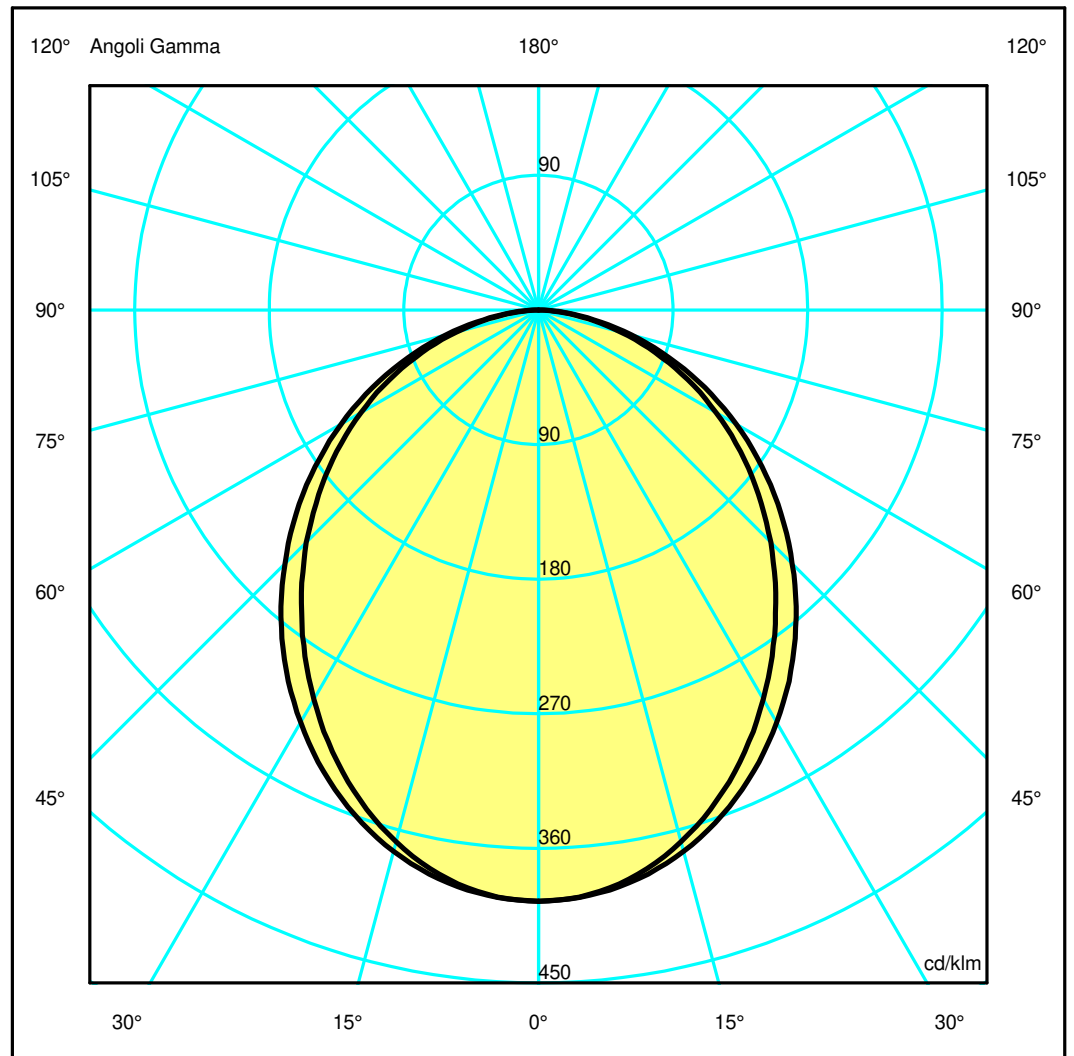

## Luminaire

Code AT00700+AT10200  
Name A.39 MODULO TLESS DIFF L=1482mm 840 ND

## Measurment.


Code FTS1800981  
Name A.39 MODULO TLESS DIFF L=1482mm 840 ND

Luminaire Flux	2587.33 lm	Luminaire Power	41.00 W	Efficacy	63.11 lm/W	Efficiency	100.00%
Sources Flux	2587.33 lm	Maximum value	395.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1482 mm	Width	92 mm	Height	35 mm
Rectangular Luminous Area		Length	1474 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.058960 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.014264 m2		
Coordinate system	CG			Symmetry Type	Double Symmetrical		
Date	22-05-2018			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	2587.33 lm		
LED Flux=6048lm LED Power=37W Eff=43% EfcLed=163lm/W EfcLum=63lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h							
C.I.E.	50 80 96 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 4		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.15	2.30	3.44	4.59	5.74	OC	1.30	2.60	3.90	5.19	6.49
OB	1.15	2.30	3.44	4.59	5.74	OD	1.30	2.60	3.90	5.19	6.49

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1022.56	1014.74	952.36	843.45	708.12	568.30	426.33	284.48	147.32	36.89
OB	1022.56	1014.74	952.36	843.45	708.12	568.30	426.33	284.48	147.32	36.89
OC	1022.56	1016.37	969.34	880.74	761.00	620.54	471.72	317.42	165.38	43.26
OD	1022.56	1016.37	969.34	880.74	761.00	620.54	471.72	317.42	165.38	43.26

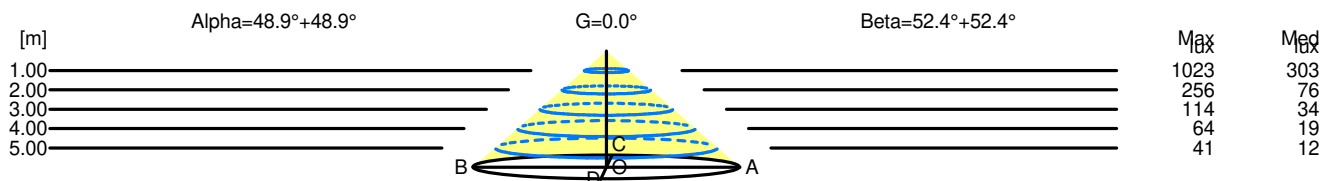

H[m]	D[m]	Max lux	Med lux	Alpha=48.9°+48.9°	G=0.0
1.00	2.30	1023	303		
2.00	4.59	256	76		
3.00	6.89	114	34		
4.00	9.18	64	19		
5.00	11.48	41	12		

H[m]	D[m]	Max lux	Med lux	Beta=52.4°+52.4°	G=0.0
1.00	2.60	1023	303		
2.00	5.19	256	76		
3.00	7.79	114	34		
4.00	10.39	64	19		
5.00	12.98	41	12		