


Luminaire

Code AT06205+AT10200
 Name A.39 MODULO RCS TRIM DIF L=2368 840 DIM SILVER

Measurement

Code FTS1801025
 Name A.39 MODULO RCS TRIM DIF L=2368 840 DIM SILVER

| | | | | | | | |
|--|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|-------------------------|
| Luminaire Flux | 4197.79 lm | Luminaire Power | 63.00 W | Efficacy | 66.63 lm/W | Efficiency | 100.00% |
| Sources Flux | 4197.79 lm | Maximum value | 394.91 cd/klm | Position | C=0.00 G=0.00 | CG | Double Symmetrical |
| Rectangular Luminaire | Length | 2368 mm | Width | 55 mm | Height | 60 mm | |
| Rectangular Luminous Area | Length | 2360 mm | Width | 40 mm | Height | 0 mm | |
| Horizontal Luminous Area | 0.094400 m ² | Emitting area on Plane 180° | 0.000000 m ² | Emitting area on Plane 270° | 0.000000 m ² | Emitting area on Plane 90° | 0.022837 m ² |
| Coordinate system | CG | Symmetry Type | Double Symmetrical | Date | 22-05-2018 | Maximum Gamma Angle | 180 |
| Measurement Distance | 0.00 | Measurement Flux | 4197.79 lm | | | | |
| LED Flux=9676,8lm LED Power=59W Eff=43% EfcLed=164lm/W EfcLum=67lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h | | | | | | | |
| C.I.E. | 50 81 96 100 100 | D DIN 5040 | A30 | | | | |
| F UTE | 1.00 E | B NBN | BZ 4 | | | | |

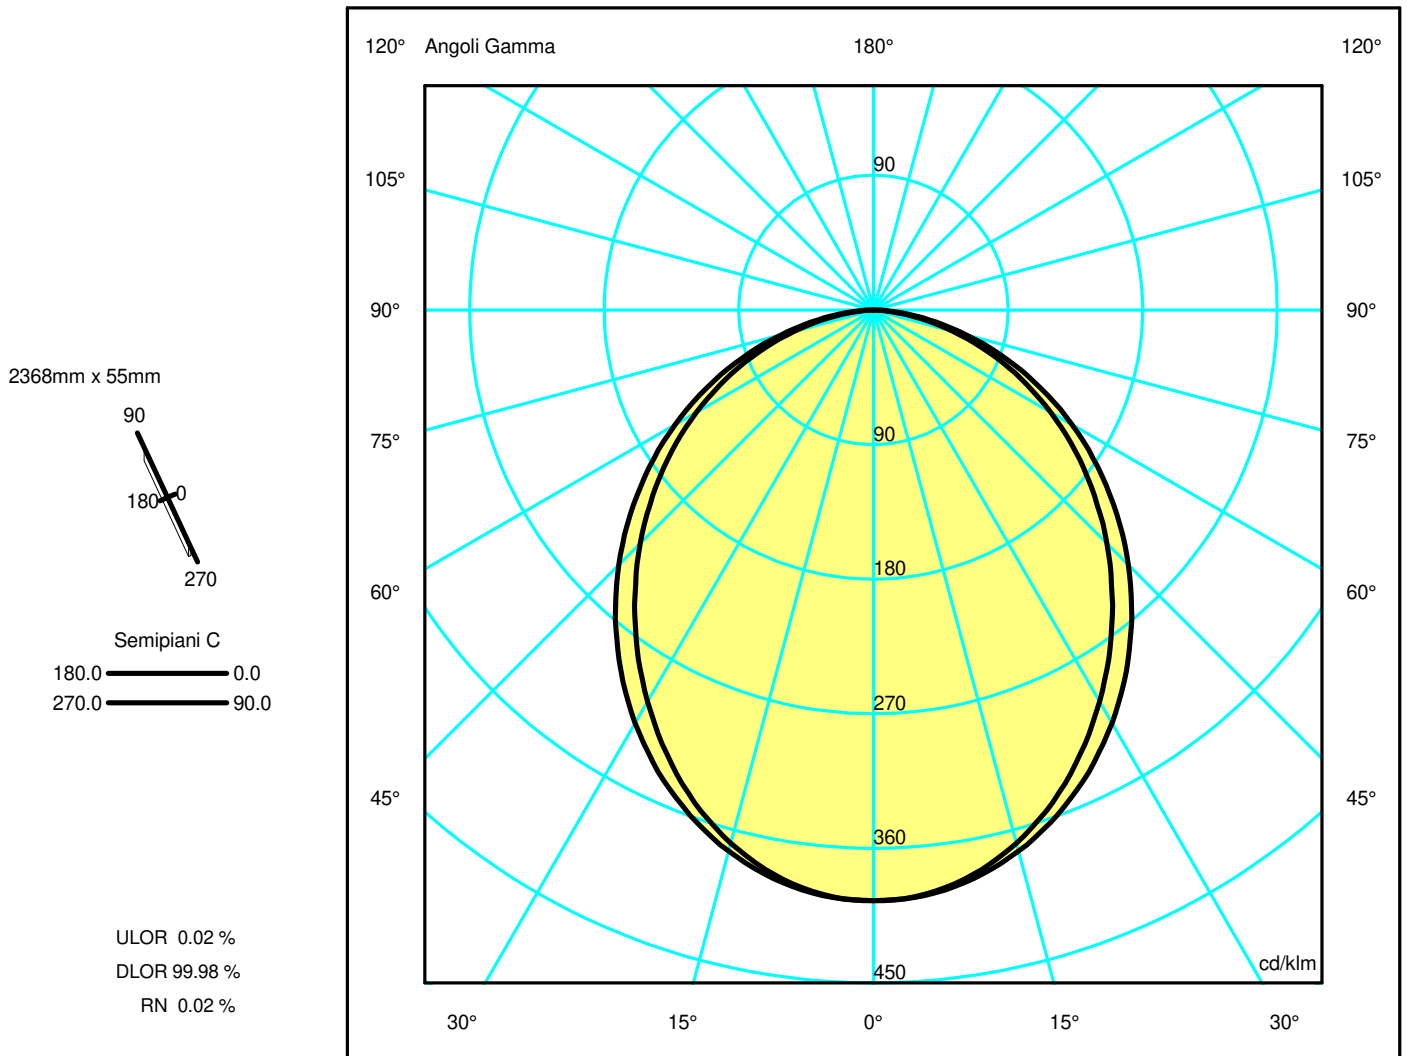

Luminaire

Code AT06205+AT10200
Name A.39 MODULO RCS TRIM DIF L=2368 840 DIM SILVER

Measurerm.

Code FTS1801025
Name A.39 MODULO RCS TRIM DIF L=2368 840 DIM SILVER

| | | | | | | | |
|----------------------------|------------|-----------------|---------------|-----------------------------|---------------|--------------------|--------------------|
| Luminaire Flux | 4197.79 lm | Luminaire Power | 63.00 W | Efficacy | 66.63 lm/W | Efficiency | 100.00% |
| Sources Flux | 4197.79 lm | Maximum value | 394.91 cd/klm | Position | C=0.00 G=0.00 | CG | Double Symmetrical |
| Rectangular Luminaire | | Length | 2368 mm | Width | 55 mm | Height | 60 mm |
| Rectangular Luminous Area | | Length | 2360 mm | Width | 40 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.094400 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.022837 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 22-05-2018 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 4197.79 lm | |


LED Flux=9676,8lm LED Power=59W Eff=43% EfcLed=164lm/W EfcLum=67lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h

| | | | |
|--------|------------------|------------|------|
| C.I.E. | 50 81 96 100 100 | D DIN 5040 | A30 |
| F UTE | 1.00 E | B NBN | BZ 4 |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 1.15 | 2.31 | 3.46 | 4.62 | 5.77 | OC | 1.30 | 2.61 | 3.91 | 5.22 | 6.52 |
| OB | 1.15 | 2.31 | 3.46 | 4.62 | 5.77 | OD | 1.30 | 2.61 | 3.91 | 5.22 | 6.52 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------------------------------|---------|---------|---------|---------|---------|--------|--------|--------|-------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 1657.76 | 1646.30 | 1549.22 | 1373.83 | 1158.11 | 926.33 | 691.87 | 458.36 | 231.42 | 48.84 |
| OB | 1657.76 | 1646.30 | 1549.22 | 1373.83 | 1158.11 | 926.33 | 691.87 | 458.36 | 231.42 | 48.84 |
| OC | 1657.76 | 1649.69 | 1572.23 | 1429.97 | 1236.87 | 1011.75 | 768.67 | 517.78 | 269.29 | 70.89 |
| OD | 1657.76 | 1649.69 | 1572.23 | 1429.97 | 1236.87 | 1011.75 | 768.67 | 517.78 | 269.29 | 70.89 |

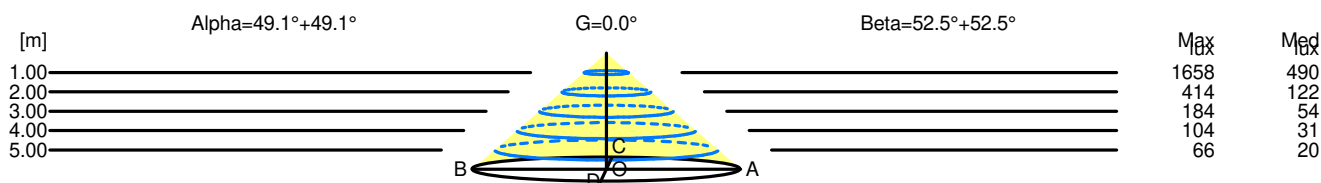

| H[m] | D[m] | Max lux | Med lux | Alpha=49.1°+49.1° | G=0.0 |
|------|-------|---------|---------|-------------------|-------|
| 1.00 | 2.31 | 1658 | 490 | | |
| 2.00 | 4.62 | 414 | 122 | | |
| 3.00 | 6.93 | 184 | 54 | | |
| 4.00 | 9.23 | 104 | 31 | | |
| 5.00 | 11.54 | 66 | 20 | | |

| H[m] | D[m] | Max lux | Med lux | Beta=52.5°+52.5° | G=0.0 |
|------|-------|---------|---------|------------------|-------|
| 1.00 | 2.61 | 1658 | 490 | | |
| 2.00 | 5.22 | 414 | 122 | | |
| 3.00 | 7.83 | 184 | 54 | | |
| 4.00 | 10.44 | 104 | 31 | | |
| 5.00 | 13.05 | 66 | 20 | | |