

## Luminaire

Code AT06801+AT10200  
 Name A.39 MODULO RCS TRIM DIFF L=1776mm 840 ND BCO

## Measurement

Code FTS1801009  
 Name A.39 MODULO RCS TRIM DIFF L=1776mm 840 ND BCO


Luminaire Flux	3403.82 lm	Luminaire Power	49.00 W	Efficacy	69.47 lm/W	Efficiency	100.00%
Sources Flux	3403.82 lm	Maximum value	389.48 cd/klm	Position	C=5.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1776 mm	Width	55 mm	Height	60 mm
Rectangular Luminous Area		Length	1768 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.070720 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°	0.017109 m2		
Coordinate system		CG		Symmetry Type	Double Symmetrical		
Date		22-05-2018		Maximum Gamma Angle	180		
Measurement Distance		0.00		Measurement Flux	3403.82 lm		

LED Flux=7257,6lm LED Power=43,5W Eff=47% EfcLed=167lm/W EfcLum=69lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h

C.I.E. 49 80 96 100 100  
 F UTE 1.00 E

D DIN 5040 A30  
 B NBN BZ 4


1776mm x 55mm



Semipiani C

180.0 — 0.0  
 270.0 — 90.0

ULOR 0.02 %  
 DLOR 99.98 %  
 RN 0.02 %

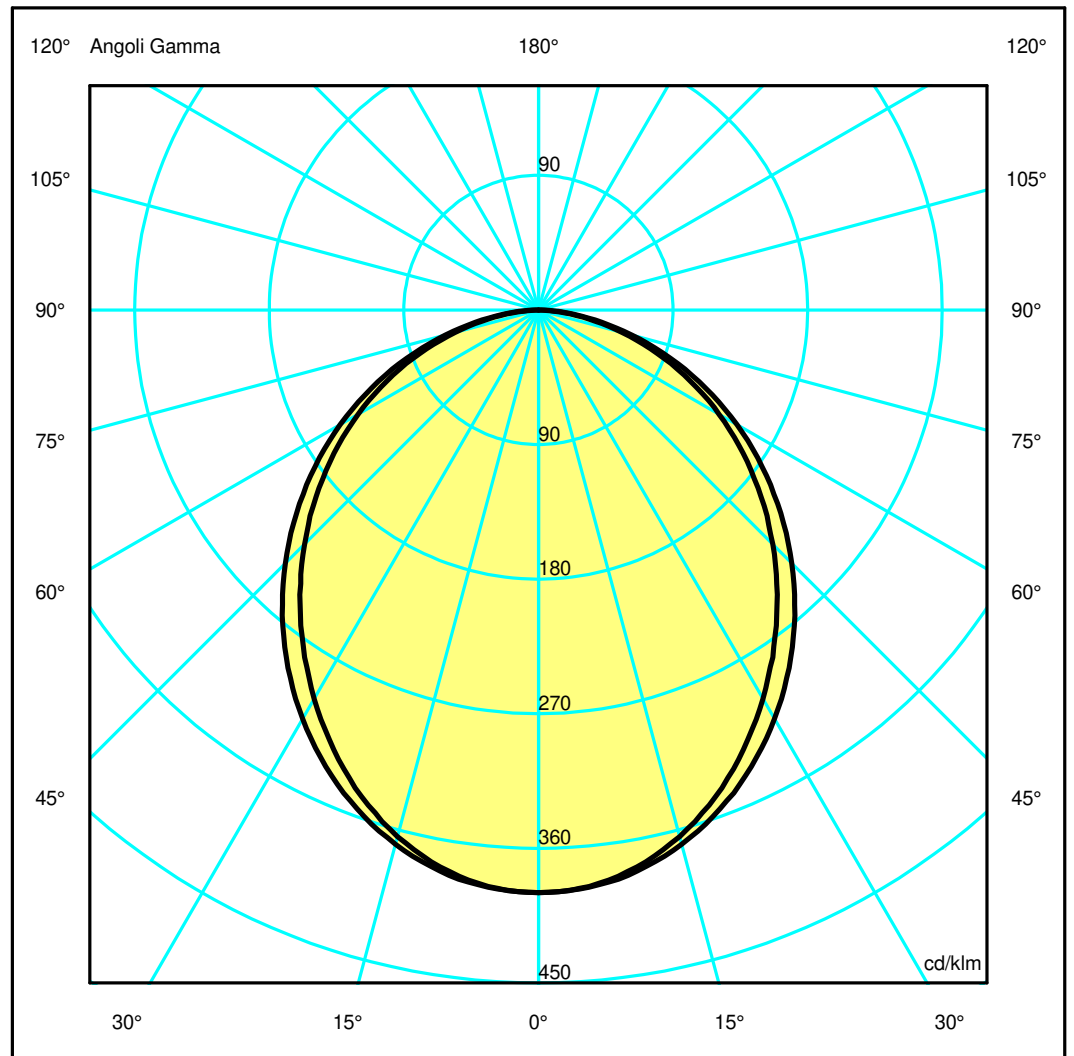

## Luminaire

Code AT06801+AT10200  
 Name A.39 MODULO RCS TRIM DIFF L=1776mm 840 ND BCO

## Measurment.

Code FTS1801009  
 Name A.39 MODULO RCS TRIM DIFF L=1776mm 840 ND BCO

Luminaire Flux	3403.82 lm	Luminaire Power	49.00 W	Efficacy	69.47 lm/W	Efficiency	100.00%
Sources Flux	3403.82 lm	Maximum value	389.48 cd/klm	Position	C=5.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1776 mm	Width	55 mm	Height	60 mm
Rectangular Luminous Area		Length	1768 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.070720 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.017109 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		22-05-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3403.82 lm	


LED Flux=7257,6lm LED Power=43,5W Eff=47% EfcLed=167lm/W EfcLum=69lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h

C.I.E.	49 80 96 100 100	D DIN 5040	A30
F UTE	1.00 E	B NBN	BZ 4

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.19	2.38	3.56	4.75	5.94	OC	1.32	2.65	3.97	5.29	6.61
OB	1.19	2.38	3.56	4.75	5.94	OD	1.32	2.65	3.97	5.29	6.61

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1325.62	1316.71	1240.77	1103.99	933.89	753.73	568.11	379.98	196.57	49.11
OB	1325.62	1316.71	1240.77	1103.99	933.89	753.73	568.11	379.98	196.57	49.11
OC	1325.62	1318.72	1258.59	1146.31	994.39	815.39	621.16	419.73	219.24	57.69
OD	1325.62	1318.72	1258.59	1146.31	994.39	815.39	621.16	419.73	219.24	57.69

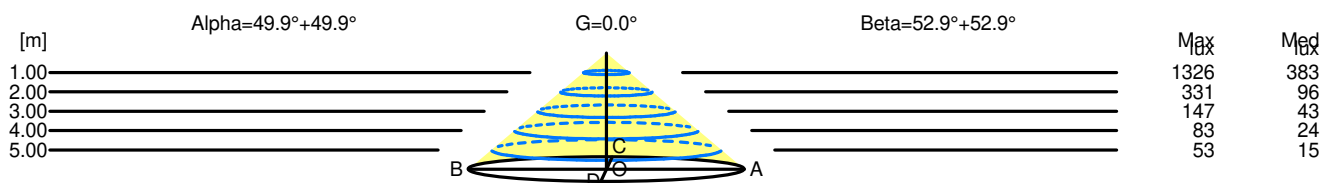

H[m]	D[m]	Max lux	Med lux	Alpha=49.9°+49.9°	G=0.0
1.00	2.38	1326	383		
2.00	4.75	331	96		
3.00	7.13	147	43		
4.00	9.50	83	24		
5.00	11.88	53	15		

H[m]	D[m]	Max lux	Med lux	Beta=52.9°+52.9°	G=0.0
1.00	2.65	1326	383		
2.00	5.29	331	96		
3.00	7.94	147	43		
4.00	10.58	83	24		
5.00	13.23	53	15		