

## Luminaire

Code AT24001+AT09507  
 Name A.39 SOSP DIR\IND 2960MM 830 DIM BCO

## Measurerm.

Code FTS1801079-B  
 Name A.39 SOSP DIR\IND 2960MM 830 DIM BCO

Luminaire Flux	11704 lm	Luminaire Power	88.0 W	Efficacy	133.000 lm/W	Efficiency	100.00%
Source Flux	11704 lm	Maximum value	195.12 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2960 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	2952 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.118080 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.028566 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		30-01-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		11704 lm	


LED Flux=15255lm LED Power=79W Eff=77% EfcLed=193lm/W EfcLum=133lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E. 49 80 96 51 100  
 F UTE 0.51 E + 0.49 T

D DIN 5040  
 B NBN

C31  
 BZ 4


2960mm x 45mm



Semipiani C

180.0 ——— 0.0  
 270.0 ——— 90.0

ULOR 49.28 %  
 DLOR 50.72 %  
 RN 49.28 %

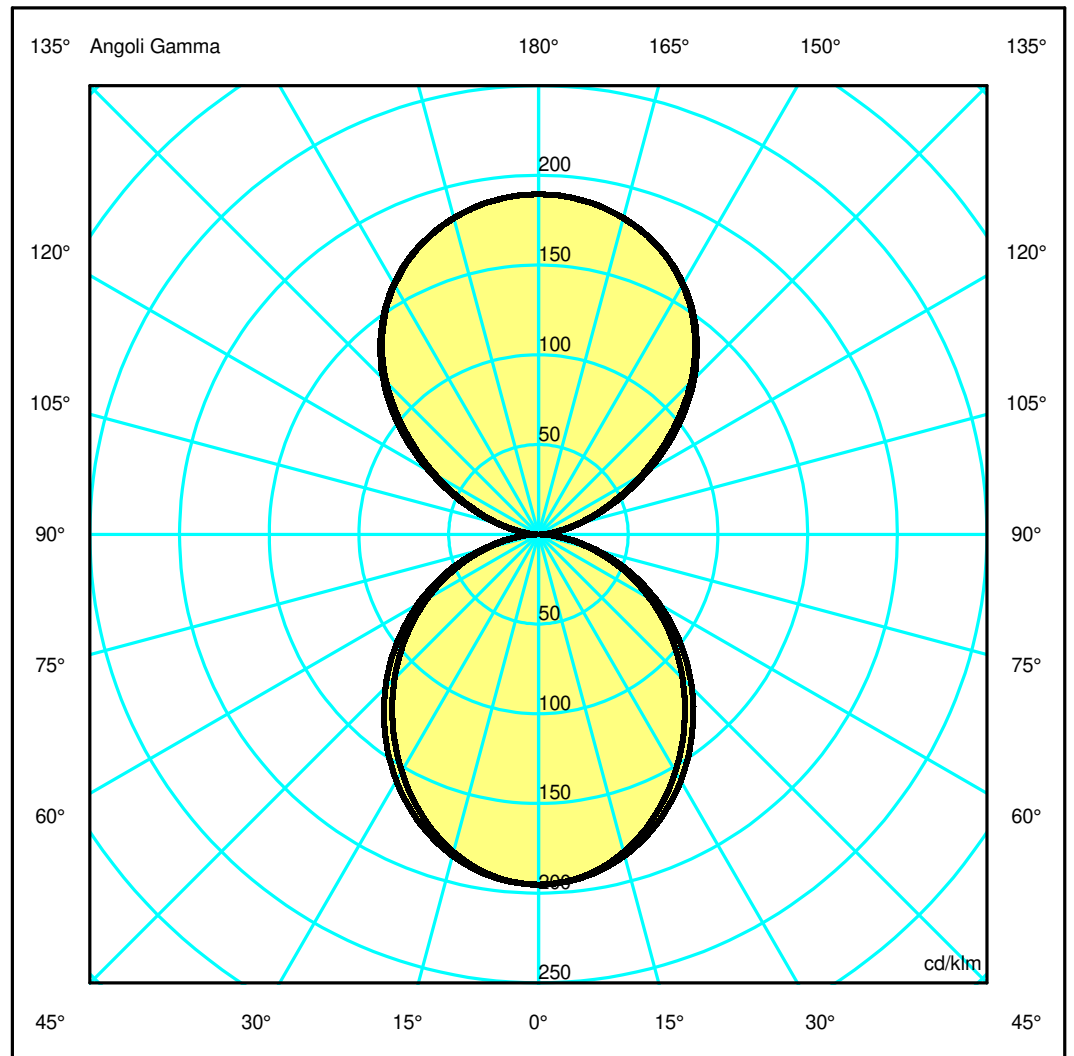

## Luminaire

Code AT24001+AT09507  
Name A.39 SOSP DIR/IND 2960MM 830 DIM BCO

## Measurerm.


Code FTS1801079-B  
Name A.39 SOSP DIR/IND 2960MM 830 DIM BCO

Luminaire Flux	11704 lm	Luminaire Power	88.0 W	Efficacy	133.000 lm/W	Efficiency	100.00%
Source Flux	11704 lm	Maximum value	195.12 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2960 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	2952 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.118080 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.028566 m2	
Coordinate system	CG			Symmetry Type		Double Symmetrical	
Date	30-01-2024			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		11704 lm	
LED Flux=15255lm LED Power=79W Eff=77% EfcLed=193lm/W EfcLum=133lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	49 80 96 51 100			D DIN 5040	C31		
F UTE	0.51 E + 0.49 T			B NBN	BZ 4		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.23	2.45	3.68	4.91	6.13	OC	1.34	2.67	4.01	5.35	6.69
OB	1.23	2.45	3.68	4.91	6.13	OD	1.34	2.67	4.01	5.35	6.69

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2283.67	2267.43	2144.27	1921.57	1639.79	1328.67	1002.83	674.67	348.58	83.10
OB	2283.67	2267.43	2144.27	1921.57	1639.79	1328.67	1002.83	674.67	348.58	83.10
OC	2283.67	2271.14	2169.77	1976.53	1719.37	1412.56	1078.49	735.83	389.11	101.65
OD	2283.67	2271.14	2169.77	1976.53	1719.37	1412.56	1078.49	735.83	389.11	101.65

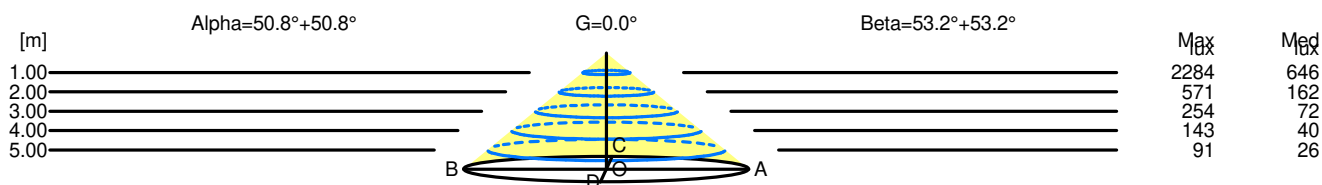

H[m]	D[m]	Max lux	Med lux	Alpha=50.8°+50.8°	G=0.0	
1.00	2.45	2284	646			
2.00	4.91	571	162			
3.00	7.36	254	72			
4.00	9.81	143	40			
5.00	12.27	91	26			

H[m]	D[m]	Max lux	Med lux	Beta=53.2°+53.2°	G=0.0	
1.00	2.67	2284	646			
2.00	5.35	571	162			
3.00	8.02	254	72			
4.00	10.70	143	40			
5.00	13.37	91	26			