


A.24 - Ceiling Magnetic Track - 90° Ceiling Track Corner (on perpendicular planes) - Brushed Bronze

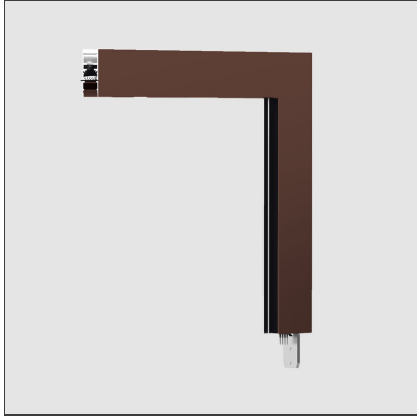

IP20   


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

A.24 is a new comprehensive and flexible system to design light in space. A single profile, only 24 mm thick, can be installed in the recessed, ceiling or suspension mode to continuously follow the angles on a flat or three-dimensional surface. This profile hosts to a variety of performance options: diffused light, sharp optical units with three beam angles, or a smart magnetic track. This makes A.24 a flexible system, as well as an open platform to accommodate other products from the Architectural collection. The suspension version also features direct emission. The three solutions can be alternated to match the architecture and the room functions with utmost flexibility. The competence of Artemide is revealed by the quality of light, as well as by the ability of A.24 to freely move in space, with direct power connection points up to 14 metres apart.

TECHNICAL DRAWINGS

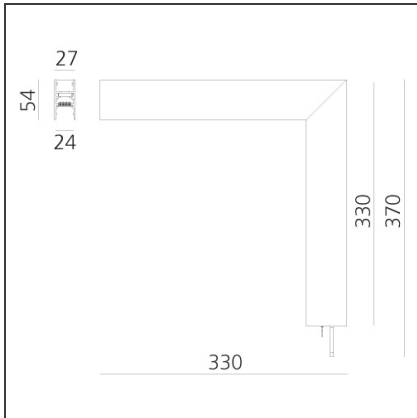

FEATURES

Article Code:	AQ39320	Series:	Indoor
Colour:	Brushed Bronze		
Installation:	Ceiling, Suspension, Recessed		
Environment:	Indoor		

DIMENSIONS

Length:	cm 31.5
Width:	cm 5.4
Height:	cm 33
Weight:	kg 0.9


Notes

Each linear, angle and curved elements are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately. Bracket for fixing to ceiling is included: 1 for 1176mm length or 2 for 2352mm length. Depending on the driver, the product can be undimmable or dimmable DALI.


ACCESSORIES




150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - Undimmable AQ17901




150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - Undimmable AQ17904




A.24 - Ceiling - Cap for cable passage. (1 pcs) - Brushed Bronze AQ39520




240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18000




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18100



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - DALI AQ17201



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - DALI AQ17204



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - APP Compatible AQ17201APP



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - APP Compatible AQ17204APP



240W Remote box power supply kit (2 connectors) - 230VAC-48VDC - IP20 - 313x243x57,5H - DALI AQ16000




150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - APP Compatible AQ17701APP

240W Remote box



power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
396x195x112H -
DALI
AQ16801



power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
Black - APP
Compatible
AQ17704APP




power supply kit
(2 connectors) -
230VAC-48VDC -
IP20 -
313x243x57,5H -
APP Compatible
AQ16000APP




240W Recessed
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
396x195x112H -
Undimmable
AQ17801



240W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
White -
Undimmable
AQ17301



240W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
Black -
Undimmable
AQ17304



A.24 - Ceiling - End
caps. (2pcs) -
Brushed Bronze
AQ39020




A.24 - Ceiling -
Transition joint -
Use between
different typology
modules (track-
diffusing-
sharping) -
Brushed Bronze
AQ39420




240W Recessed
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
396x195x112H -
APP Compatible
AQ16801APP



150W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
White - DALI
AQ17701



150W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
Black - DALI
AQ17704



DALI to DALI-Selv
Interface
103x67x21H
AQ18200



A.24 - Ceiling -
Insulating Spacer -
Use between
modules powered
by different power
supplies (1pcs) -

Brushed Bronze
AQ39120