


## A.24 - Ceiling Magnetic Track - 90° Ceiling Track Corner (on perpendicular planes) - Brushed Copper

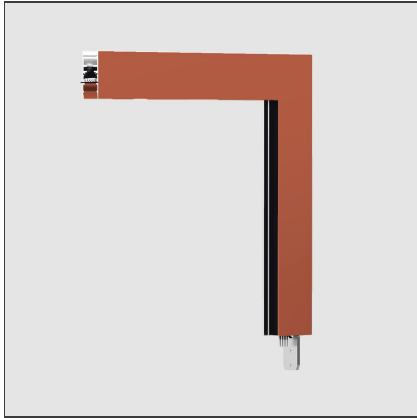

IP20   


### DESIGN BY

Carlotta de Bevilacqua

### DESCRIPTION

A.24 is a new comprehensive and flexible system to design light in space. A single profile, only 24 mm thick, can be installed in the recessed, ceiling or suspension mode to continuously follow the angles on a flat or three-dimensional surface. This profile hosts to a variety of performance options: diffused light, sharp optical units with three beam angles, or a smart magnetic track. This makes A.24 a flexible system, as well as an open platform to accommodate other products from the Architectural collection. The suspension version also features direct emission. The three solutions can be alternated to match the architecture and the room functions with utmost flexibility. The competence of Artemide is revealed by the quality of light, as well as by the ability of A.24 to freely move in space, with direct power connection points up to 14 metres apart.

### TECHNICAL DRAWINGS

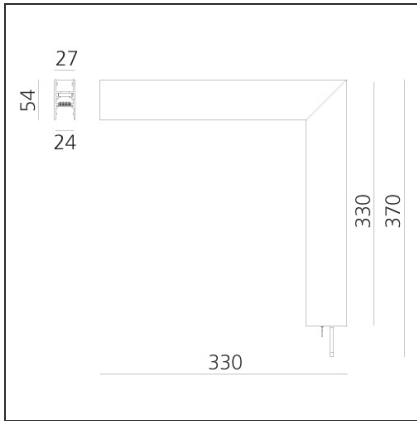

### FEATURES

<b>Article Code:</b>	AQ39318	<b>Series:</b>	Indoor
<b>Colour:</b>	Brushed Copper		
<b>Installation:</b>	Ceiling, Suspension, Recessed		
<b>Environment:</b>	Indoor		

### DIMENSIONS

<b>Length:</b>	cm 31.5
<b>Width:</b>	cm 5.4
<b>Height:</b>	cm 33
<b>Weight:</b>	kg 0.9


### Notes

Each linear, angle and curved elements are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately. Bracket for fixing to ceiling is included: 1 for 1176mm length or 2 for 2352mm length. Depending on the driver, the product can be undimmable or dimmable DALI.


**ACCESSORIES**



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - Undimmable AQ17901




150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - Undimmable AQ17904




A.24 - Ceiling - Cap for cable passage. (1 pcs) - Brushed Copper AQ39518




240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18000




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18100




240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - DALI AQ17201



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - DALI AQ17204




240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - APP Compatible AQ17201APP



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - APP Compatible AQ17204APP



240W Remote box power supply kit (2 connectors) - 230VAC-48VDC - IP20 - 313x243x57,5H - DALI AQ16000




150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - APP Compatible AQ17701APP

240W Remote box



power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
396x195x112H -  
DALI  
AQ16801



power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
Black - APP  
Compatible  
AQ17704APP




power supply kit  
(2 connectors) -  
230VAC-48VDC -  
IP20 -  
313x243x57,5H -  
APP Compatible  
AQ16000APP




240W Recessed  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
396x195x112H -  
Undimmable  
AQ17801



240W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
White -  
Undimmable  
AQ17301



240W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
Black -  
Undimmable  
AQ17304



A.24 - Ceiling - End  
caps. (2pcs) -  
Brushed Copper  
AQ39018




A.24 - Ceiling -  
Transition joint -  
Use between  
different typology  
modules (track-  
diffusing-  
sharping) -  
Brushed Copper  
AQ39418




240W Recessed  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
396x195x112H -  
APP Compatible  
AQ16801APP



150W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
White - DALI  
AQ17701



150W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
Black - DALI  
AQ17704



DALI to DALI-Selv  
Interface  
103x67x21H  
AQ18200



A.24 - Ceiling -  
Insulating Spacer -  
Use between  
modules powered  
by different power  
supplies (1pcs) -

Brushed Copper  
AQ39118