

# A.24 - Suspension Magnetic Track - Track + Indirect Emission - 1176mm - 2700K - Black



IP20 Dimmerable: + -


## DESIGN BY

Carlotta de Bevilacqua

## DESCRIPTION

A.24 is a new comprehensive and flexible system to design light in space. A single profile, only 24 mm thick, can be installed in the recessed, ceiling or suspension mode to continuously follow the angles on a flat or three-dimensional surface. This profile hosts to a variety of performance options: diffused light, sharp optical units with three beam angles, or a smart magnetic track. This makes A.24 a flexible system, as well as an open platform to accommodate other products from the Architectural collection. The suspension version also features direct emission. The three solutions can be alternated to match the architecture and the room functions with utmost flexibility. The competence of Artemide is revealed by the quality of light, as well as by the ability of A.24 to freely move in space, with direct power connection points up to 14 metres apart.

## TECHNICAL DRAWINGS

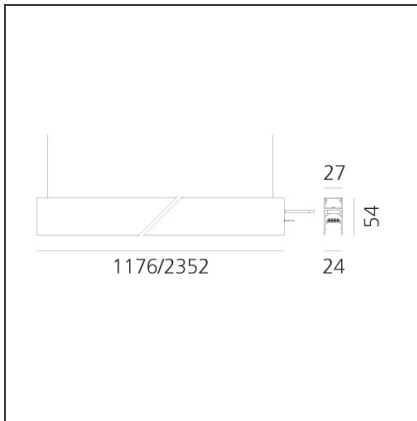

## FEATURES

<b>Article Code:</b>	AQ40604	<b>Series:</b>	Indoor
<b>Colour:</b>	Black		
<b>Installation:</b>	Ceiling, Suspension, Recessed		
<b>Environment:</b>	Indoor		

## DIMENSIONS

<b>Length:</b>	cm 117.6
<b>Width:</b>	cm 2.7
<b>Height:</b>	cm 5.4
<b>Weight:</b>	kg 1.7

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	2700K
<b>Number:</b>	1	<b>CRI:</b>	80
<b>Watt:</b>	16W		
<b>Type:</b>	0		


## LUMINAIRE

<b>Watt:</b>	16W	<b>Delivered lumens output (lm):</b>	1502lm
		<b>CCT:</b>	2700K
		<b>Efficiency:</b>	67%
		<b>Efficacy:</b>	93.86lm/W
		<b>CRI:</b>	80
		<b>Dimmable Typology:</b>	Dali


## Notes

Each linear, angle and curved elements are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately. 1 suspension cable is also included. Depending on the driver, the product can be undimmable or dimmable DALI.


**ACCESSORIES**



A.24 - Suspension  
- End caps. (2pcs)  
including 1  
suspension cable  
200H - Black  
AQ49004



240W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
Black - APP  
Compatible  
AQ16104APP



150W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
White - APP  
Compatible  
AQ17501APP



150W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
Black - APP  
Compatible  
AQ17504APP




A.24 - Suspension  
- Transition joint -  
Use between  
different typology  
modules (track-  
diffusing-  
sharping) - Black  
AQ49404



240W Recessed  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
396x195x112H -  
Black - DALI  
AQ15404



240W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
White - DALI  
AQ16101



240W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
Black - DALI  
AQ16104



240W Remote box  
power supply kit  
(2 connectors) -  
230VAC-48VDC -  
IP20 -  
313x243x57,5H -  
DALI  
AQ16000



240W Remote box  
power supply kit  
(2 connectors) -  
230VAC-48VDC -  
IP20 -  
313x243x57,5H -  
APP Compatible  
AQ16000APP



A.24 - Suspension  
- Insulating Spacer  
- Use between  
modules powered  
by different power  
supplies (1 pcs) -  
Black  
AQ49104



240W Recessed  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
396x195x112H -  
White - APP  
Compatible  
AQ15401APP  
240W Recessed




240W Recessed  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
396x195x112H -  
Black - APP  
Compatible  
AQ15404APP  
240W Bare power




240W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
White - APP  
Compatible  
AQ16101APP  
150W Bare power



power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
396x195x112H -  
White - DALI  
AQ15401



supply + plug  
230VAC-48VDC  
IP20 -  
Undimmable (for  
dimmable version  
to be combined  
with "DALI-Selv  
interface")  
AQ18000




supply + plug  
230VAC-48VDC  
IP20 -  
Undimmable (for  
dimmable version  
to be combined  
with "DALI-Selv  
interface")  
AQ18100



240W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
Black -  
Undimmable  
AQ17104



150W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
White -  
Undimmable  
AQ17601




150W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
Black -  
Undimmable  
AQ17604



150W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
White - DALI  
AQ17501



150W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
Black - DALI  
AQ17504



DALI to DALI-Selv  
Interface  
103x67x21H  
AQ18200



240W Recessed  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
396x195x112H -  
White -  
Undimmable  
AQ17401



240W Recessed  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
396x195x112H -  
Black -  
Undimmable  
AQ17404



240W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
White -  
Undimmable  
AQ17101