

## A.24 - Suspension Magnetic Track - Track + Indirect Emission - 1176mm - 2700K - Brushed Silver



IP20 Dimmerable: + -


### DESIGN BY

Carlotta de Bevilacqua

### DESCRIPTION

A.24 is a new comprehensive and flexible system to design light in space. A single profile, only 24 mm thick, can be installed in the recessed, ceiling or suspension mode to continuously follow the angles on a flat or three-dimensional surface. This profile hosts to a variety of performance options: diffused light, sharp optical units with three beam angles, or a smart magnetic track. This makes A.24 a flexible system, as well as an open platform to accommodate other products from the Architectural collection. The suspension version also features direct emission. The three solutions can be alternated to match the architecture and the room functions with utmost flexibility. The competence of Artemide is revealed by the quality of light, as well as by the ability of A.24 to freely move in space, with direct power connection points up to 14 metres apart.

### TECHNICAL DRAWINGS

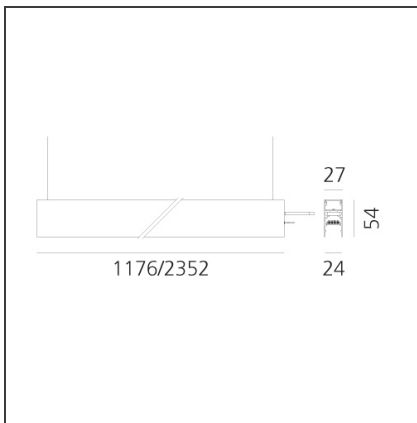

### FEATURES

<b>Article Code:</b>	AQ40615	<b>Series:</b>	Indoor
<b>Colour:</b>	Brushed Silver		
<b>Installation:</b>	Ceiling, Suspension, Recessed		
<b>Environment:</b>	Indoor		

### DIMENSIONS

<b>Length:</b>	cm 117.6
<b>Width:</b>	cm 2.7
<b>Height:</b>	cm 5.4
<b>Weight:</b>	kg 1.7

### INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	2700K
<b>Number:</b>	1	<b>CRI:</b>	80
<b>Watt:</b>	16W		
<b>Type:</b>	0		

### LUMINAIRE

<b>Watt:</b>	16W	<b>Delivered lumens output (lm):</b>	1502lm
		<b>CCT:</b>	2700K
		<b>Efficiency:</b>	67%
		<b>Efficacy:</b>	93.86lm/W
		<b>CRI:</b>	80
		<b>Dimmable Typology:</b>	Dali


### Notes

Each linear, angle and curved elements are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately. 1 suspension cable is also included. Depending on the driver, the product can be undimmable or dimmable DALI.


**ACCESSORIES**



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - APP Compatible AQ16104APP




150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - APP Compatible AQ17501APP




150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - APP Compatible AQ17504APP



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - Black - DALI AQ15404



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - DALI AQ16101



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - DALI AQ16104



240W Remote box power supply kit (2 connectors) - 230VAC-48VDC - IP20 - 313x243x57,5H - DALI AQ16000



240W Remote box power supply kit (2 connectors) - 230VAC-48VDC - IP20 - 313x243x57,5H - APP Compatible AQ16000APP




240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - White - APP Compatible AQ15401APP




240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - Black - APP Compatible AQ15404APP



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - APP Compatible AQ16101APP



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - White - DALI AQ15401




240W Bare power supply + plug 230VAC-48VDC IP20 -


Undimmable (for dimmable version to be combined with "DALI-Selv interface")




A.24 - Suspension  
- Insulating Spacer  
- Use between  
modules powered  
by different power  
supplies (1pcs) -  
Brushed Silver  
AQ49115



150W Bare power  
supply + plug  
230VAC-48VDC  
IP20 -  
Undimmable (for  
dimmable version  
to be combined  
with "DALI-Selv  
interface")  
AQ18100



A.24 - Suspension  
- End caps. (2pcs)  
including 1  
suspension cable  
200H - Brushed  
Silver  
AQ49015




240W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
Black -  
Undimmable  
AQ17104




150W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
White -  
Undimmable  
AQ17601



150W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
Black -  
Undimmable  
AQ17604




150W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
White - DALI  
AQ17501



150W Ceiling  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
Black - DALI  
AQ17504



A.24 - Suspension  
- Transition joint -  
Use between  
different typology  
modules (track-  
diffusing-  
sharping) -  
Brushed Silver  
AQ49415




DALI to DALI-Selv  
Interface  
103x67x21H  
AQ18200



240W Recessed  
power supply kit  
(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
396x195x112H -  
White -  
Undimmable  
AQ17401



240W Recessed  
power supply kit



240W Ceiling  
power supply kit

(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
396x195x112H -  
Black -  
Undimmable  
AQ17404

(cable length 2,2  
m) - 230VAC-  
48VDC - IP20 -  
321x91x111H -  
White -  
Undimmable  
AQ17101