

A.24 - Suspension Magnetic Track - Track + Indirect Emission - 2352mm - 3000K - Black



IP20 Dimmerable: + -


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

A.24 is a new comprehensive and flexible system to design light in space. A single profile, only 24 mm thick, can be installed in the recessed, ceiling or suspension mode to continuously follow the angles on a flat or three-dimensional surface. This profile hosts to a variety of performance options: diffused light, sharp optical units with three beam angles, or a smart magnetic track. This makes A.24 a flexible system, as well as an open platform to accommodate other products from the Architectural collection. The suspension version also features direct emission. The three solutions can be alternated to match the architecture and the room functions with utmost flexibility. The competence of Artemide is revealed by the quality of light, as well as by the ability of A.24 to freely move in space, with direct power connection points up to 14 metres apart.

TECHNICAL DRAWINGS

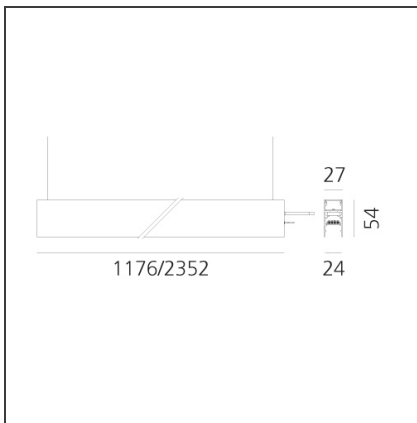

FEATURES

Article Code:	AQ40404	Series:	Indoor
Colour:	Black		
Installation:	Ceiling, Suspension, Recessed		
Environment:	Indoor		

DIMENSIONS

Length:	cm 235.2
Width:	cm 2.7
Height:	cm 5.4
Weight:	kg 2.7

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	CRI:	80
Watt:	33W		
Type:	0		


LUMINAIRE

Watt:	33W	Delivered lumens output (lm):	3049lm
		CCT:	3000K
		Efficiency:	67%
		Efficacy:	92.4lm/W
		CRI:	80
		Dimmable Typology:	Dali


Notes

Each linear, angle and curved elements are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately. 1 suspension cable is also included. Depending on the driver, the product can be undimmable or dimmable DALI.


ACCESSORIES



A.24 - Suspension
- End caps. (2pcs)
including 1
suspension cable
200H - Black
AQ49004



240W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
Black - APP
Compatible
AQ16104APP



150W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
White - APP
Compatible
AQ17501APP



150W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
Black - APP
Compatible
AQ17504APP




A.24 - Suspension
- Transition joint -
Use between
different typology
modules (track-
diffusing-
sharping) - Black
AQ49404



240W Recessed
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
396x195x112H -
Black - DALI
AQ15404



240W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
White - DALI
AQ16101



240W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
Black - DALI
AQ16104



240W Remote box
power supply kit
(2 connectors) -
230VAC-48VDC -
IP20 -
313x243x57,5H -
DALI
AQ16000



240W Remote box
power supply kit
(2 connectors) -
230VAC-48VDC -
IP20 -
313x243x57,5H -
APP Compatible
AQ16000APP



A.24 - Suspension
- Insulating Spacer
- Use between
modules powered
by different power
supplies (1 pcs) -
Black
AQ49104



240W Recessed
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
396x195x112H -
White - APP
Compatible
AQ15401APP
240W Recessed




240W Recessed
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
396x195x112H -
Black - APP
Compatible
AQ15404APP
240W Bare power




240W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
White - APP
Compatible
AQ16101APP
150W Bare power



power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
396x195x112H -
White - DALI
AQ15401



supply + plug
230VAC-48VDC
IP20 -
Undimmable (for
dimmable version
to be combined
with "DALI-Selv
interface")
AQ18000




supply + plug
230VAC-48VDC
IP20 -
Undimmable (for
dimmable version
to be combined
with "DALI-Selv
interface")
AQ18100



240W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
Black -
Undimmable
AQ17104



150W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
White -
Undimmable
AQ17601




150W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
Black -
Undimmable
AQ17604



150W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
White - DALI
AQ17501



150W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
Black - DALI
AQ17504



DALI to DALI-Selv
Interface
103x67x21H
AQ18200



240W Recessed
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
396x195x112H -
White -
Undimmable
AQ17401



240W Recessed
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
396x195x112H -
Black -
Undimmable
AQ17404



240W Ceiling
power supply kit
(cable length 2,2
m) - 230VAC-
48VDC - IP20 -
321x91x111H -
White -
Undimmable
AQ17101