


A.39 Recessed Sharping Emission - Structural Module Trim - 1184mm - 20° - 4000K - Undimmable/Dimmable DALI - 2x4 Optics - Black

Carlotta de Bevilacqua



IP 20  Regulable: 

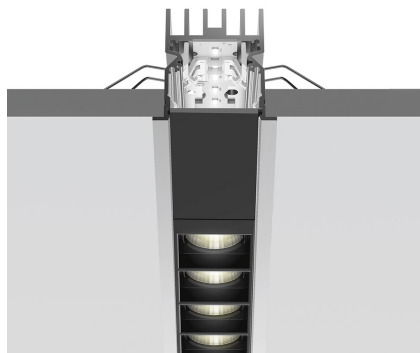

LUMINARIA

- Potencia (W): **22W**
- Flujo Luminoso (lm): **1764lm**
- CCT: **4000K**
- Efficiency: **76%**
- Efficacy: **80.19lm/W**
- CRI: **90**
- Dimmable Typology: **Dali**

Notas

Louvers supplied separately.
Driver 900mA SELV supplied separately.
APP interface supplied separately.
The APP driver can not be controlled by DALI dimming system and viceversa.

ESPECIFICACIONES

Optimized version in line applications with wide lenghts. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

CÓDIGO PRODUCTO: BH20104

CARACTERÍSTICAS

- Código del artículo: **BH20104**
- Color: **Black**
- Instalación: **Empotrado**
- Serie: **Architectural Indoor**
- Emisión: **Direct**
- diseño: **Carlotta de Bevilacqua**

DIMENSIONES

- Longitud: **cm 118**
- Ancho: **cm 5.5**
- Profundidad empotrado: **cm 5.7**

FUENTES DE LUZ INCLUIDAS

- Categoría: **Led**
- Numero: **1**
- Potencia (W): **22W**
- Temperatura de Color (K): **4000K**
- Color Tolerance: **MacAdam 2SDCM**
- Service Life: **L90 (20K) 118000h**

ACCESORIOS



Louvre - 1184mm 2x4 optics white
AE40001



Louvre - 1184mm 2x4 optics black
AE40004



Driver 60W - 900mA - 220-240V - Undimmable
DV1024



Sharping wall grazer lens Kit (4pcs) - 26°x70° elliptical lenses kit. It has to be used on top of S 20° reflectors to get an elliptical beam (greter axis along the module lenght). It contains 4 lenses.
AF06000



Driver - 220-240V - APP
DV1053APP



A.39 Recessed - Trim End Cap (Kit 2x) - Up to 5m - Black
AT09004



Driver 25W - 900mA - 220-240V - Undimmable
DV1022



A.39 Recessed - Trim End Cap (Kit 2x) - Up to 15m - Black
AT09104



A.39 Recessed - Trim End Cap (Kit 2x) - Up to 35m - Black
AT09204