


A.39 Recessed Sharping Emission - Structural Module Trim - 2368mm - 20° - 3000K - Undimmable/Dimmable DALI - 6x4 Optics - Silver

Carlotta de Bevilacqua



IP 20  Regulable: 

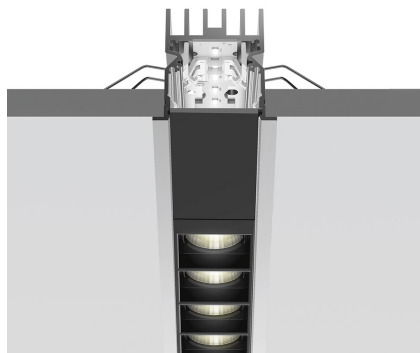

LUMINARIA

- Potencia (W): **66W**
- Flujo Luminoso (lm): **4945lm**
- CCT: **3000K**
- Efficiency: **76%**
- Efficacy: **74.93lm/W**
- CRI: **90**
- Dimmable Typology: **Dali**

Notas

Louvers supplied separately.
Driver 900mA SELV supplied separately.
APP interface supplied separately.
The APP driver can not be controlled by DALI dimming system and viceversa.
Order 2 drivers to power this module.

ESPECIFICACIONES

Optimized version in line applications with wide lenghts. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

CÓDIGO PRODUCTO: BH23005

CARACTERÍSTICAS

- Código del artículo: **BH23005**
- Color: **Silver**
- Instalación: **Empotrado**
- Serie: **Architectural Indoor**
- Emisión: **Direct**
- diseño: **Carlotta de Bevilacqua**

DIMENSIONES

- Longitud: **cm 237**
- Ancho: **cm 5.5**
- Profundidad empotrado: **cm 5.7**

FUENTES DE LUZ INCLUIDAS

- Categoría: **Led**
- Numero: **1**
- Potencia (W): **66W**
- Temperatura de Color (K): **3000K**
- Color Tolerance: **MacAdam 2SDCM**
- Service Life: **L90 (20K) 118000h**

ACCESORIOS



Louvre - 2368mm 6x4 optics - white
AE43001



Louvre - 2368mm 6x4 optics black
AE43004



A.39 Recessed - Trim End Cap (Kit 2x) - Up to 15m - Silver
AT09105



A.39 Recessed - Trim End Cap (Kit 2x) - Up to 35m - Silver
AT09205



Sharping wall grazer lens Kit (4pcs) - 26°x70° elliptical lenses kit. It has to be used on top of S 20° reflectors to get an elliptical beam (greter axis along the module lenght). It contains 4 lenses.
AF06000



Driver - 220-240V - APP
DV1053APP



Driver 45W - 900mA - 220-240V - DALI
DV1027



Driver 45W - 900mA - 220-240V - DALIq
DV1029



A.39 Recessed - Trim End Cap (Kit 2x) - Up to 5m - Silver
AT09005