



# A.39 Recessed Sharping Emission - Structural Module Trim - 2368mm - 36° - 4000K - Undimmable/Dimmable DALI - 6x4 Optics - White

Carlotta de Bevilacqua

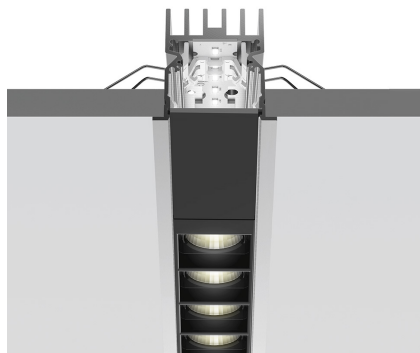

IP 20  Regulable: 



## LUMINARIA

- Potencia (W): **66W**
- Flujo Luminoso (lm): **4952lm**
- CCT: **4000K**
- Efficiency: **71%**
- Efficacy: **75.03lm/W**
- CRI: **90**
- Dimmable Typology: **Dali**

## Notas

Louvers supplied separately.  
Driver 900mA SELV supplied separately.  
APP interface supplied separately.  
The APP driver can not be controlled by DALI dimming system and viceversa.  
Order 2 drivers to power this module.

## ESPECIFICACIONES

Optimized version in line applications with wide lenghts. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

**CÓDIGO PRODUCTO: BH23301**

## CARACTERÍSTICAS

- Código del artículo: **BH23301**
- Color: **White**
- Instalación: **Empotrado**
- Serie: **Architectural Indoor**
- Emisión: **Direct**
- diseño: **Carlotta de Bevilacqua**

## DIMENSIONES

- Longitud: **cm 237**
- Ancho: **cm 5.5**
- Profundidad empotrado: **cm 5.7**

## FUENTES DE LUZ INCLUIDAS

- Categoría: **Led**
- Numero: **1**
- Potencia (W): **66W**
- Temperatura de Color (K): **4000K**
- Color Tolerance: **MacAdam 2SDCM**
- Service Life: **L90 (20K) 118000h**

ACCESORIOS



Louvre - 2368mm 6x4 optics - white  
AE43001



Louvre - 2368mm 6x4 optics black  
AE43004

NO  
IMAGE  
AVAILABLE

Driver - 220-240V - APP  
DV1053APP

NO  
IMAGE  
AVAILABLE

A.39 Recessed - Trim End Cap (Kit 2x) - Up to 5m  
- White  
AT09001



Driver 45W - 900mA - 220-240V - DALI  
DV1027



Driver 45W - 900mA - 220-240V - DALIq  
DV1029

NO  
IMAGE  
AVAILABLE

A.39 Recessed - Trim End Cap (Kit 2x) - Up to 15m -  
White  
AT09101

NO  
IMAGE  
AVAILABLE

A.39 Recessed - Trim End Cap (Kit 2x) - Up to  
35m - White  
AT09201