



# A.39 Suspension - Direct + Indirect Emission - 2368mm - 20° - 3000K - Dimmable DALI - 6x4 Optics - Black

Carlotta de Bevilacqua

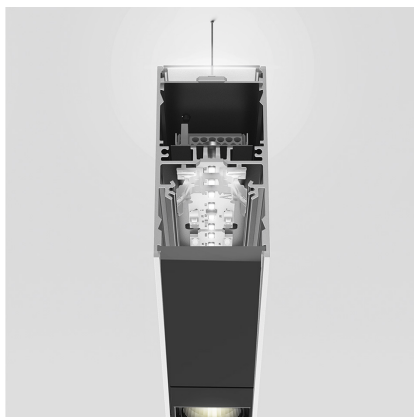

IP 20    Regulable: 



## LUMINARIA

- Potencia (W): **120W**
- Flujo Luminoso (lm): **10857lm**
- CCT: **3000K**
- Efficiency: **81%**
- Efficacy: **90.48lm/W**
- CRI: **90**
- Dimmable Typology: **Dali**

## Notas

Louvers supplied separately.  
APP interface supplied separately.  
The APP driver can not be controlled by DALI dimming system and viceversa.

## ESPECIFICACIONES

Optimized version in line applications with wide lengths. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

## CÓDIGO PRODUCTO: BH10204

## CARACTERÍSTICAS

- Código del artículo: **BH10204**
- Color: **Black**
- Instalación: **Suspensión**
- Serie: **Architectural Indoor**
- diseño: **Carlotta de Bevilacqua**

## DIMENSIONES

- Longitud: **cm 237**
- Ancho: **cm 4.5**
- Altura: **cm 8.5**

## FUENTES DE LUZ INCLUIDAS

- Categoría: **Led**
- Numero: **1**
- Potencia (W): **80W**
- Temperatura de Color (K): **3000K**
- Color Tolerance: **MacAdam 2SDCM**
- Service Life: **L90 (20K) 118000h**
- Categoría: **Led**
- Numero: **1**
- Potencia (W): **54W**
- Temperatura de Color (K): **3000K**
- Color Tolerance: **MacAdam 2SDCM**
- Service Life: **L90 (20K) 118000h**

ACCESORIOS



Louvre - 2368mm 6x4 optics - white  
AE43001



Louvre - 2368mm 6x4 optics black  
AE43004



A.39 - Mechanical joint including 1 suspension cable  
AT09500



Sharping wall grazer lens Kit (4pcs) - 26°x70°  
elliptical lenses kit. It has to be used on top of S  
20° reflectors to get an elliptical beam (greter  
axis along the module lenght). It contains 4  
lenses.  
AF06000



Angle louvre - 90° corner screen (on same plane) -  
White  
BH44001



Angle louvre - 90° corner screen (on same plane)  
- Black  
BH44004



A.39 - Dimmable APP Feeding kit including 2  
suspension cables (5 poles) 2000m (H)  
AT10500APP



A.39 - Dimmable Feeding kit including 2  
suspension cables (5 poles) 2000m (H)  
AT10500



A.39 - Suspension/Ceiling - End Caps (2pcs) - Black  
BH16404