



A.39 Suspension - Direct + Indirect Emission - 2368mm - 20° - 4000K - Dimmable DALI - 6x4 Optics - Silver

Carlotta de Bevilacqua

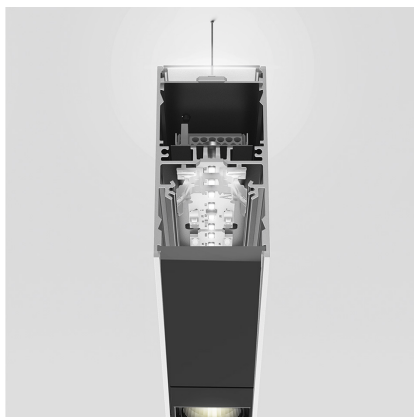

IP 20    Regulable: 



LUMINARIA

- Potencia (W): **120W**
- Flujo Luminoso (lm): **11469lm**
- CCT: **4000K**
- Efficiency: **81%**
- Efficacy: **95.58lm/W**
- CRI: **90**
- Dimmable Typology: **Dali**

Notas

Louvers supplied separately.
APP interface supplied separately.
The APP driver can not be controlled by DALI dimming system and viceversa.

ESPECIFICACIONES

Optimized version in line applications with wide lengths. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

CÓDIGO PRODUCTO: BH10305

CARACTERÍSTICAS

- Código del artículo: **BH10305**
- Color: **Silver**
- Instalación: **Suspensión**
- Serie: **Architectural Indoor**
- diseño: **Carlotta de Bevilacqua**

DIMENSIONES

- Longitud: **cm 237**
- Ancho: **cm 4.5**
- Altura: **cm 8.5**

FUENTES DE LUZ INCLUIDAS

- Categoría: **Led**
- Numero: **1**
- Potencia (W): **80W**
- Temperatura de Color (K): **4000K**
- Color Tolerance: **MacAdam 2SDCM**
- Service Life: **L90 (20K) 118000h**
- Categoría: **Led**
- Numero: **1**
- Potencia (W): **54W**
- Temperatura de Color (K): **4000K**
- Color Tolerance: **MacAdam 2SDCM**
- Service Life: **L90 (20K) 118000h**

ACCESORIOS



Louvre - 2368mm 6x4 optics - white
AE43001



Louvre - 2368mm 6x4 optics black
AE43004



A.39 - Mechanical joint including 1 suspension cable
AT09500



Sharping wall grazer lens Kit (4pcs) - 26°x70° elliptical lenses kit. It has to be used on top of S 20° reflectors to get an elliptical beam (greter axis along the module lenght). It contains 4 lenses.
AF06000



Angle louvre - 90° corner screen (on same plane) -
White
BH44001



Angle louvre - 90° corner screen (on same plane) -
Black
BH44004



A.39 - Dimmable APP Feeding kit including 2
suspension cables (5 poles) 2000m (H)
AT10500APP



A.39 - Dimmable Feeding kit including 2
suspension cables (5 poles) 2000m (H)
AT10500



A.39 - Suspension/Ceiling - End Caps (2pcs) - Silver
BH16405