











## Dioscuri wall/ceiling 25

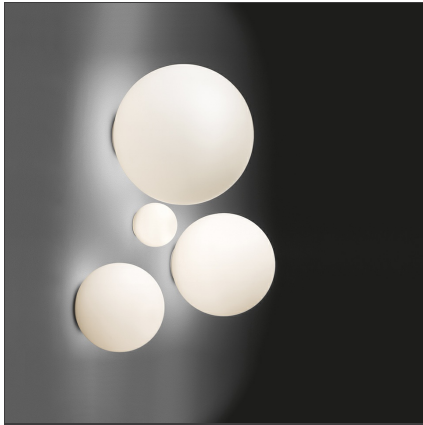

IP65       

Dimmerable: +  -

### TECHNICAL DRAWINGS

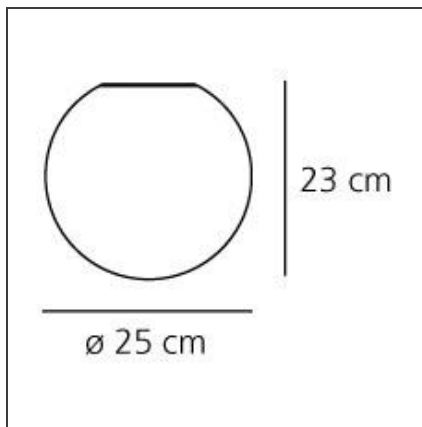

### DESIGN BY

Michele De Lucchi

### DESCRIPTION

Materials: Thermoplastic resin ceiling support; acid-etched blown glass diffuser. IP65 rating makes it suitable also for outdoor use. (Only for 25, 35, 42 versions).

### FEATURES

<b>Article Code:</b>	0112010A	<b>Material:</b>	Blown glass, polycarbonate
<b>Colour:</b>	White	<b>Series:</b>	Design, Outdoor
<b>Installation:</b>	Wall, Ceiling	<b>Area contract:</b>	Hospitality, null, Residential
		<b>Emission:</b>	Diffused

### DIMENSIONS

<b>Height:</b>	cm 23	<b>Impact Resistance:</b>	N.D.
		<b>Glow Wire Test:</b>	850

### NOT INCLUDED SOURCES

<b>Category:</b>	HALO	<b>Color Rendering:</b>	1a
<b>Number:</b>	1	<b>Color temperature (K):</b>	2900K
<b>Watt:</b>	77W		
<b>Lbs:</b>	A60		
<b>Socket:</b>	E27		
<b>Duration (h):</b>	1000h		

### ALTERNATIVE SOURCES

<b>Category:</b>	LED
<b>Number:</b>	1
<b>Watt:</b>	15W
<b>Type:</b>	2
<b>Socket:</b>	E27
<b>Class:</b>	A

### LUMINAIRE

<b>Watt:</b>	77W	<b>Delivered lumens output (lm):</b>	1180lm
<b>Voltage:</b>	220V-240V	<b>CCT:</b>	3000K
		<b>Efficiency:</b>	89%
		<b>Efficacy:</b>	15lm/W
		<b>CRI:</b>	99

### Notes

Lamp not included. The IP 65 degree of protection makes it also suitable for outdoor application.