

Ilio Glossy black 2700K



IP20 Dimmerable:


DESIGN BY

Ernesto Gismondi

DESCRIPTION

With simple geometry, stripped of all formal digressions and reduced to its basics, Ilio draws attention through saturated colour, available in 7 variations. A mono-material aluminium cylinder supports a 39W LED optical engine on the top, which produces high-efficiency diffused indirect light emissions. With a flow of more than 2700 lumen and an 80% yield, it ensures the general lighting of a room. With light regulator configured to controlled socket, dimmer microswitch.

TECHNICAL DRAWINGS

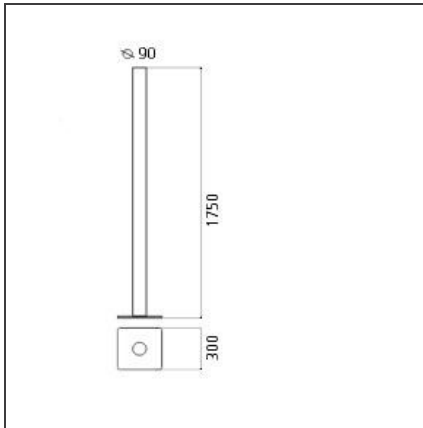

FEATURES

| | | | |
|----------------------|--------------|-----------------------|-----------------------------------|
| Article Code: | 1640W30A | Material: | Aluminium, steel |
| Colour: | Glossy black | Series: | Design |
| Installation: | Floor | Area contract: | Hospitality, null, Residential |
| Environment: | Indoor | Emission: | Indirect |

DIMENSIONS

| | | | |
|---------------------|--------|---------------------------|------|
| Height: | cm 175 | Impact Resistance: | N.D. |
| Base Length: | cm 30 | Glow Wire Test: | 750 |
| Base Width: | cm 30 | | |

INCLUDED SOURCES

| | | | |
|--------------------------------------|--------|-------------------------------|---------------|
| Category: | LED | Color temperature (K): | 2700K |
| Number: | 1 | Color Tolerance: | MacAdam 2SDCM |
| Watt: | 36.36W | CRI: | 90 |
| Delivered lumens output (lm): | 3646lm | Efficacy: | 100lm/W |
| Type: | 0 | Service Life: | 50000-L70 |
| Class: | A | | |

LUMINAIRE

| | | | |
|-----------------|----------|--------------------------------------|--------------------|
| Watt: | 45W | Delivered lumens output (lm): | 3332lm |
| Voltage: | 220-240V | CCT: | 2700K |
| | | Efficiency: | 87% |
| | | Efficacy: | 74.04lm/W |
| | | CRI: | 90 |
| | | Dimmer Typology: | Microswitch Dimmer |