



# LineaLed 16W RGB

Carlotta de Bevilacqua

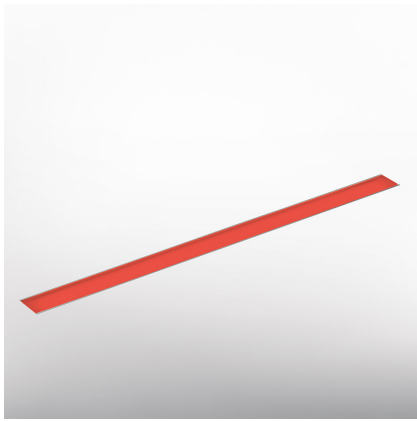

IP65/67  

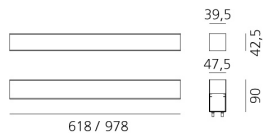

## LUMINARIA

- Power Supply: **Driver RGB**
- Potencia (W): **16W**
- Tensión de alimentación: **24Vdc PWM**

## Notas

Remote Led Driver supplied separately.  
Maximum n°7 of fixtures per LED driver.

## ESPECIFICACIONES

Light fixture with high-performance LED light sources.  
Walk-over and drive-over recessed floor installation.  
Walk over and drive over approved up to 5000Kg.  
RGB light.  
Composed by body in extruded aluminium, protection glass; provided with junction box for input/output connection.  
Floor recessing box in steel.  
Body in extruded EN AW6060 T5 aluminum.  
End caps in injection-moulded polycarbonate with silicone gasket.  
8mm-thick opal non-slip tempered glass.  
Glass surface temperature lower than 35°.  
Recessing box for laying in AISI 304 steel, with end caps and accessories for series connection (to be ordered separately).  
Body fastened to the recessing box by means of proper pre-stressed steel springs supplied with the fixture.  
Painted profile with 2-stage outdoor treatment: primer, outdoor paint.  
RGB version with Full Colour RGB LEDs.  
IP Rating IP65-IP67.  
Insulation class III.  
Technical features of light fixtures in compliance with EN60598-1.  
Installation must be carried out by specialized personnel. Carefully follow the instructions.

## CÓDIGO PRODUCTO: NL76490

## CARACTERÍSTICAS

- Código del artículo: **NL76490**
- Instalación: **Empotrado**
- Material: **Aluminium**
- Serie: **Architectural Outdoor**
- Área de uso: **Urban**
- diseño: **Carlotta de Bevilacqua**

## DIMENSIONES

- Longitud: **cm 97.8**
- Ancho: **cm 4.7**
- Altura: **cm 9**

## FUENTES DE LUZ INCLUIDAS

- Categoría: **Led**
- Numero: **1**
- Potencia (W): **16W**
- Temperatura de Color (K): **RGB**
- Tensión de alimentación: **24 Vdc**

ACCESORIOS

NO  
IMAGE  
AVAILABLE

Female power connector for discontinuos connection  
NL19023

NO  
IMAGE  
AVAILABLE

Housing L=982mm  
NL76700

NO  
IMAGE  
AVAILABLE

50cm-long cable with HE10 connector for  
connection to a keyboard  
NL7833



DRIVER LED NLX 2-100 RGB 100W IP65  
NL84100

NO  
IMAGE  
AVAILABLE

CONNETTORE ALIMENTAZIONE + TAPPO  
NL19052

NO  
IMAGE  
AVAILABLE

DRIVER LED NLX 2-150 Max150W IP65  
NL77270

NO  
IMAGE  
AVAILABLE

DSC30 interfaccia USB - DMX stand alone microled  
NL19030

NO  
IMAGE  
AVAILABLE

Housing end cap (pair) - 46,5 x 62,5 x 1,5mm  
NL76750

NO  
IMAGE  
AVAILABLE

Male power connector for discontinuos connection  
NL19021

NO  
IMAGE  
AVAILABLE

Housing L=622mm  
NL76720



DRIVER LED NLX 2-70 IP65  
NL81260

NO  
IMAGE  
AVAILABLE

Alimentatore 9V/350mA con connettore mini USB  
per DSC30  
NL19031



LINEALED STAFFA GIUNZIONE C/CASSA  
NL75810

80 x 50 x 1,5mm  
staffa di giunzione  
continuity gear