

Vector Track 95 35W 16° 4000K DALI Eutrac White



IP20 Dimmbar: + **1** -


DESIGN

Carlotta de Bevilacqua

BESCHREIBUNG

Three sizes with three different beam angles each (spot, flood, wide flood) obtained by means of refractive or hybrid optical units. Vector 55 track DALI zoom optic (22°-32°). Junction arm integrated in the spotlight's body to keep the barycentre aligned with the track and prevent any imbalance in possible suspension versions of the track. The junction allows 360° rotation and 90° tilting for maximum emission adjustment freedom. Vector 95 available only in track version. Version with compact 4-conductor (3p+n) adapter with hidden LED driver and not-dimmable phase selector.

TECHNISCHE ZEICHNUNGEN

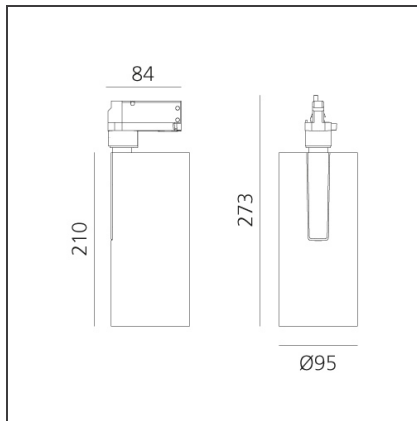

FUNKTIONEN

| | | | |
|---------------------------|----------------------------|---------------|--------|
| Artikelnummer: | AN35601 | Serie: | Indoor |
| Farbe: | White | | |
| Installation: | Projector, Stromschiene | | |
| Anwendungsbereich: | Innenbeleuchtung | | |

DIMENSION

| | |
|-----------------|---------|
| Höhe: | cm 27.3 |
| Neigung: | -90+90 |
| Drehung: | cm 360 |

INKLUSIVE LEUCHTMITTEL

| | | | |
|-------------------|-----|---------------------------|-------|
| Kategorie: | LED | Farbtemperatur(K): | 4000K |
| Anzahl: | 1 | CRI: | 90 |
| Watt: | 35W | | |
| Typ: | 0 | | |
| Class: | A | | |

LUMINAIRE

| | | | |
|--------------|-----|---------------------------|-----------|
| Watt: | 30W | Lichtstrom (lm): | 2735lm |
| | | CCT: | 4000K |
| | | Efficiency: | 78% |
| | | Efficacy: | 91.18lm/W |
| | | CRI: | 90 |
| | | Dimmable Typology: | Dali |

Anmerkungen

220/240Vac 50/60Hz Electronic ballast included.

ZUBEHÖR

Adjustable
dowsers
M059910



Lens for elliptical
emission
M282007



Anti-dazzle louvre
M282100



Accessories holder
- Vector 95
AP92100



Soft filter
M056807