

## Vector Track 95 35W 60° 3000K DALI White



IP20  Dimmbar: + -


### DESIGN

Carlotta de Bevilacqua

### BESCHREIBUNG

Three sizes with three different beam angles each (spot, flood, wide flood) obtained by means of refractive or hybrid optical units. Vector 55 track DALI zoom optic (22°-32°). Junction arm integrated in the spotlight's body to keep the barycentre aligned with the track and prevent any imbalance in possible suspension versions of the track. The junction allows 360° rotation and 90° tilting for maximum emission adjustment freedom. Vector 95 available only in track version. Version with compact 4-conductor (3p+n) adapter with hidden LED driver and not-dimmable phase selector.

### TECHNISCHE ZEICHNUNGEN

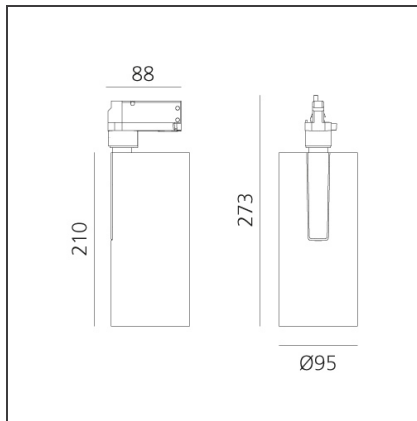

### FUNKTIONEN

|                           |                            |               |        |
|---------------------------|----------------------------|---------------|--------|
| <b>Artikelnummer:</b>     | AN20801                    | <b>Serie:</b> | Indoor |
| <b>Farbe:</b>             | White                      |               |        |
| <b>Installation:</b>      | Projector,<br>Stromschiene |               |        |
| <b>Anwendungsbereich:</b> | Innenbeleuchtung           |               |        |

### DIMENSION

|                 |         |
|-----------------|---------|
| <b>Höhe:</b>    | cm 27.3 |
| <b>Neigung:</b> | -90+90  |
| <b>Drehung:</b> | cm 360  |

### INKLUSIVE LEUCHTMITTEL

|                   |     |                           |       |
|-------------------|-----|---------------------------|-------|
| <b>Kategorie:</b> | LED | <b>Farbtemperatur(K):</b> | 3000K |
| <b>Anzahl:</b>    | 1   | <b>CRI:</b>               | 90    |
| <b>Watt:</b>      | 35W |                           |       |
| <b>Typ:</b>       | 0   |                           |       |
| <b>Class:</b>     | A   |                           |       |

### LUMINAIRE

|              |     |                           |           |
|--------------|-----|---------------------------|-----------|
| <b>Watt:</b> | 30W | <b>Lichtstrom (lm):</b>   | 2662lm    |
|              |     | <b>CCT:</b>               | 3000K     |
|              |     | <b>Efficiency:</b>        | 78%       |
|              |     | <b>Efficacy:</b>          | 88.72lm/W |
|              |     | <b>CRI:</b>               | 90        |
|              |     | <b>Dimmable Typology:</b> | Dali      |

### Anmerkungen

220/240Vac 50/60Hz Electronic ballast included.

**ZUBEHÖR**

Adjustable  
dowsers  
M059910



Lens for elliptical  
emission  
M282007



Anti-dazzle louvre  
M282100



Accessories holder  
- Vector 95  
AP92100



Soft filter  
M056807