


# A.24 - Wall/Ceiling Diffused Emission - Track - Direct Emission - 2352mm - 3000K - Brushed Copper

Carlotta de Bevilacqua



IP20    Dimmerable: 

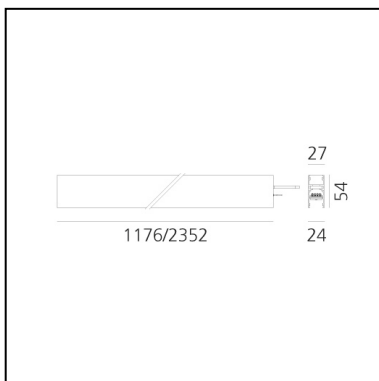

## LUMINAIRE

- Watt: **66W**
- Delivered lumens output: **5769lm**
- CCT: **3000K**
- Efficiency: **64%**
- Efficacy: **87.41lm/W**
- CRI: **80**

## Notes

For curved systems use only flexible opal diffusing screen. Do not mix flexible diffusing screen and opal diffusing screen.

\*Uses 2 DALI addresses.

Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories.

2 brackets for fixing to ceiling are included.

End caps have to be ordered separately.

Opal diffusing screen has to be ordered separately.

Depending on the driver, the product can be undimmable or dimmable DALI.

## DESCRIPTION

A.24 is a new comprehensive and flexible system to design light in space. A single profile, only 24 mm thick, can be installed in the recessed, ceiling or suspension mode to continuously follow the angles on a flat or three-dimensional surface. This profile hosts to a variety of performance options: diffused light, sharp optical units with three beam angles, or a smart magnetic track. This makes A.24 a flexible system, as well as an open platform to accommodate other products from the Architectural collection. The suspension version also features direct emission. The three solutions can be alternated to match the architecture and the room functions with utmost flexibility. The competence of Artemide is revealed by the quality of light, as well as by the ability of A.24 to freely move in space, with direct power connection points up to 14 metres apart.

## PRODUCT CODE: AQ31218

## FEATURES

- Article Code: **AQ31218**
- Colour: **Brushed Copper**
- Installation: **WallCeiling**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Emission: **Direct**
- design by: **Carlotta de Bevilacqua**

## DIMENSIONS

- Length: **cm 235.2**
- Width: **cm 2.7**
- Height: **cm 5.4**
- Weight: **cm 2.7**

## SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **66W**
- Color temperature (K): **3000K**
- CRI: **80**
- Color Tolerance: **MacAdam 2SDCM**
- Service Life: **L70 (6K) 50000h**

**Accessories**

NO  
IMAGE  
AVAILABLE

4pcs feed connectors (for powering multiple sections with a single power kit) AQ90500

NO  
IMAGE  
AVAILABLE

Power cable, 2x0.75 + 2x0.35, mm2 (to realized customized power cable) - 10m - White AQ90600

NO  
IMAGE  
AVAILABLE

Power cable, 2x0.75 + 2x0.35, mm2 (to realized customized power cable) - 50m - White AQ90700

NO  
IMAGE  
AVAILABLE

Power cable, 2x0.75 + 2x0.35, mm2 (to realized customized power cable) - 10m - Black AQ90800

NO  
IMAGE  
AVAILABLE

Power cable, 2x0.75 + 2x0.35, mm2 (to realized customized power cable) - 50m - Black AQ90900



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - APP Compatible AQ17201APP



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - APP Compatible AQ17204APP



240W Remote box power supply kit (2 connectors) - 230VAC-48VDC - IP20 - 313x243x57,5H - DALI AQ16000



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - APP Compatible AQ17701APP



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - DALI AQ16801



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - APP Compatible AQ17704APP



240W Remote box power supply kit (2 connectors) - 230VAC-48VDC - IP20 - 313x243x57,5H - APP Compatible AQ16000APP



A.24 - Opal Diffusing Screen - 10m AQ16200



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - Undimmable AQ17901



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - Undimmable AQ17904



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18000



150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18100



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - DALI AQ17201



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - DALI AQ17204



A.24 - Opal Diffusing Screen - 25m AQ16300



A.24 - Opal Diffusing Screen - 50m AQ16400



A.24 - Opal Diffusing Screen - 2352mm AQ16600



A.24 - Opal Diffusing Screen - 3528mm AQ16700



A.24 - Ceiling - Insulating Spacer - Use between modules powered by different power supplies (1pcs) - Brushed Copper AQ35118



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - Undimmable AQ17801



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - Undimmable AQ17301



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - Undimmable AQ17304



A.24 - Ceiling - End caps. (2pcs) - Brushed Copper AQ35018



A.24 - Ceiling - Transition joint - Use between different typology modules (track-diffusing-sharping) - Brushed Copper AQ39418



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - APP Compatible AQ16801APP



A.24 - Ceiling - Cap for cable passage. (1pcs) - Brushed Copper AQ35318



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - DALI AQ17701



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - DALI AQ17704



DALI to DALI-Selv Interface 103x67x21H AQ18200