

# Algoritmo System - Diffused Emission - Structural modules suspension, ceiling, wall - 1184mm Gloss anodized

Carlotta de Bevilacqua  
Paola di Arianello



## DESCRIPTION


A modular system for ceiling or wall-recessed installation, to be installed as a continuous line or with angles, composed of structural modules in extruded aluminium, of pre-wired gear plates with through-wiring and quick-connection system of optics systems and components for connecting, fixing, joining or finishing the system. The prewired LED plates were designed for diffused emission, wall washer light, prismoptic or controlled emission, for projectors integration (PAD or Cube 37), for 3 phase track alimentation. Complies with standard EN60598-1 and any other specific standard.

## CARACTÉRISTIQUES

- Code Produit : **M205060**
- Couleur: **Gloss anodised**
- Installation: **AppliqueSuspensionPlafonnier**
- Matériaux: **Aluminium Extrudé**
- Séries: **Architectural Indoor**
- dessiné par: **Carlotta de Bevilacqua, Paola di Arianello**

## DIMENSIONS

- Longueur : **1180 mm**

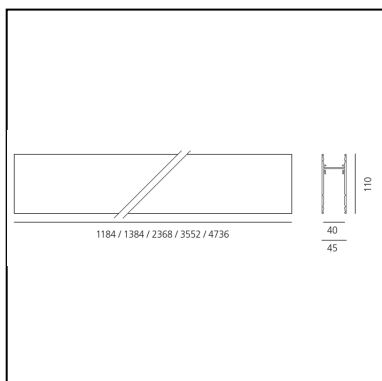

**ACCESSOIRES**



Suspension kit with power supply. Includes 1 single steel suspension cable + 1 power supply cable Length 2 meters. MV (5x1,5mm<sup>2</sup>+2x0,5mm<sup>2</sup>) To power fluorescent modules, white LED plates and accent modules. M189300



End caps (set of 2) glossy anodised M188860



Linear connector M189000



Bracket for fixing to wall/ceiling (1 piece) M199400



Suspension kit with power supply. Includes 1 single steel suspension cable + 1 power supply cable Length 2 meters. LV (3x1,5mm<sup>2</sup>) For supplying LED modules RGB. M189200



90° angle to mechanically connect of 2 modules on perpendicular planes. Includes through-wire extensions. 0.60 kg. glossy anodised M196760



90° joint to mechanically connect two recessed modules on one same plane - 0.30 kg - Gloss anodised (To be ordered with kit cover angle cod. AE44001 / AE44004) M196860



Wall bracket To mechanically connect a wall-mounted module. M199300



Steel suspension cable with quick adjustment Length 2 meters M189100